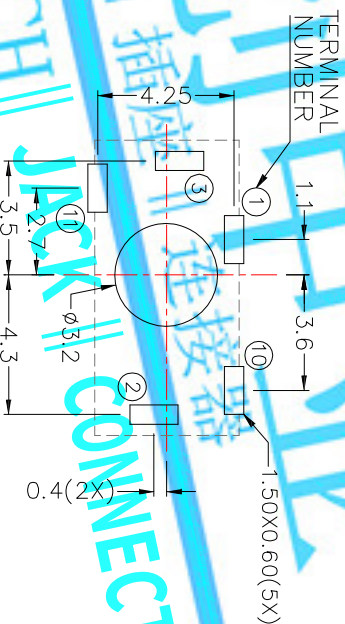
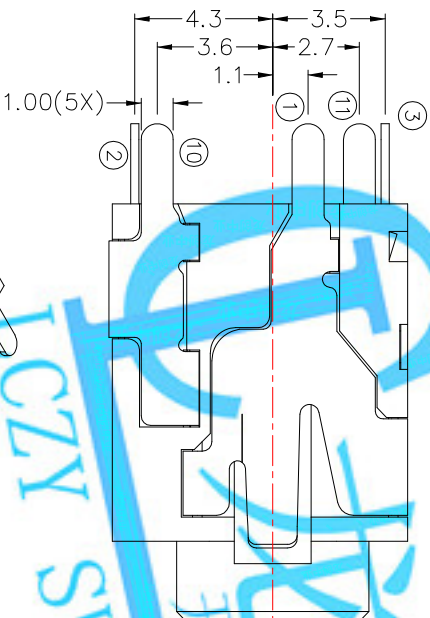
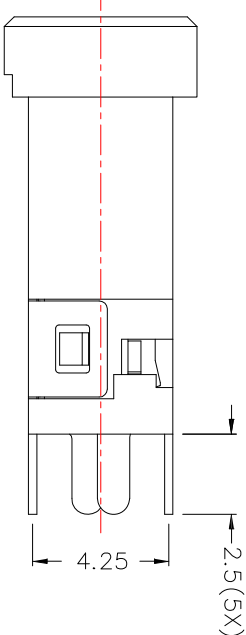
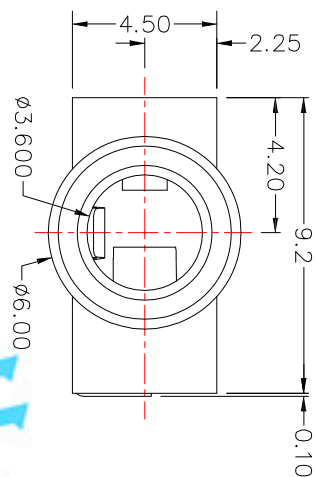
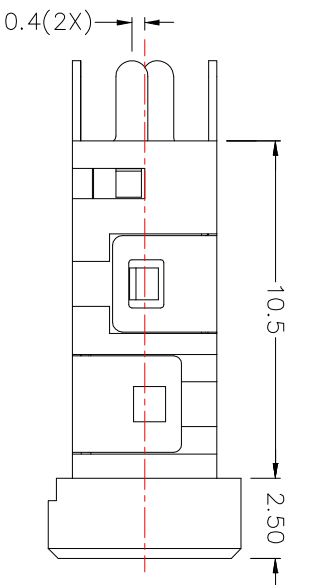



SPECIFICATION

- 1.Rating : DC 12V 1.0A
- 2.Contact resistance : $\leq 50m\Omega$
- 3.Insulation resistance : $\geq 100M\Omega$
- 4.Withstand voltage : 500VAC
- 5.Insertion and extraction force : 3-30N
- 6.life test : 5,000 cycles

* MATERIAL

TERMINAL 1 : PHOSPHOR BRONZE
TERMINAL 2 : PHOSPHOR BRONZE
TERMINAL 3 : PHOSPHOR BRONZE
TERMINAL 10: BRASS
TERMINAL 11: BRASS
HOUSING : PBT

MODEL NO.	PJ-3935	PJ-3934A	PJ-3934B	PJ-3933
SCHEMATIC				

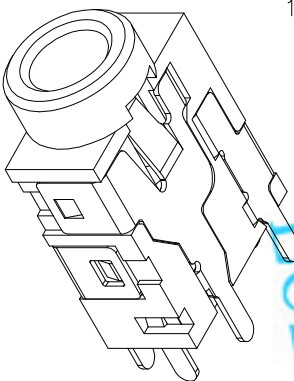

LONGCHUANG ZHONGYE (HK)CO.,LIMITED

DRAWN BY: Jack Lu

CHECKED BY: Jacky Chen

APPROVED BY: Tony Kao

DATE: 11/03/15

DATE: 11/03/15

DATE: 11/03/15

MATL: FINISH

SCALE: 1:1

SHEET NO. 1 of 1

TITLE: JACK

MODLE: PHONE JACK

DWG NO. PJ-393x

PART NO. PJ-393x

SIZE: A4

VER: R1

TOLERANCE UNLESS
OTHERWISE STATED :
Up to 5 ± 0.2
Above 5 ~ 15 ± 0.3
Above 15 ~ 30 ± 0.4
Above 30 ~ 50 ± 0.5
Angle ± 0.3

3RD.
ANGEL'S

UNITS

MM