


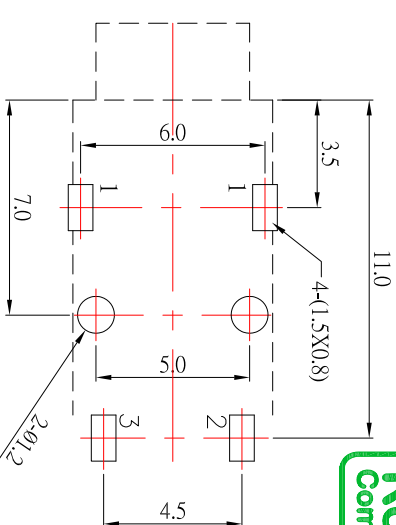
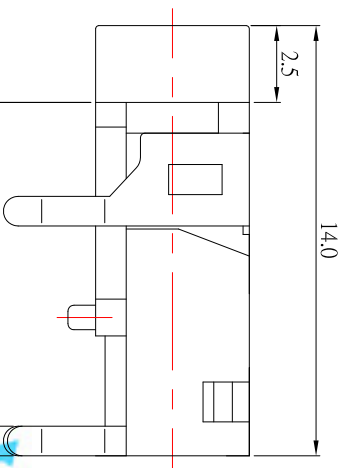


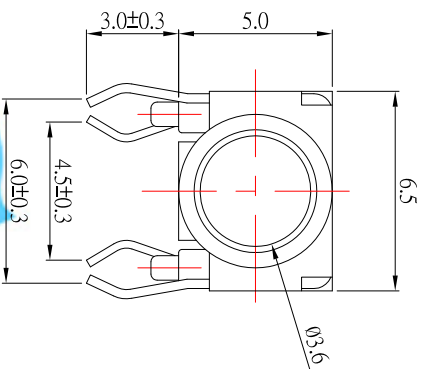

P.C.B LAYOUT MOUNTING PATTERN
(TOP VIEW)

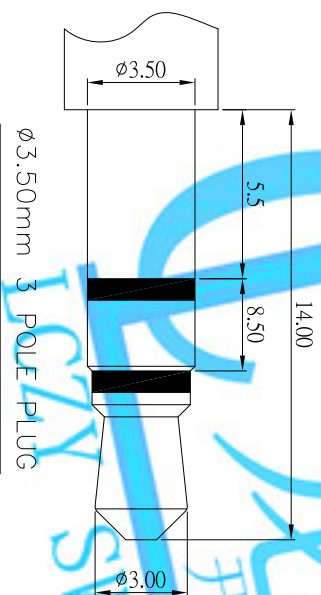


03.50mm 3 POLE PLUG

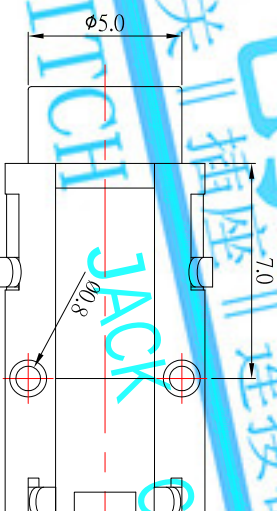

MODEL NO.	PI-3733
SCHEMATIC	

SPECIFICATION

- 1.Rating : DC 30V 0.5A ;
 - 2.Contact resistance : $\leq 30m\Omega$;
 - 3.Insulation resistance : $\geq 100M\Omega$;
 - 4.Withstand voltage : 500V AC ;
 - 5.Insertion and extraction force : 3-20N
- 6.life test : 5,000 cycles °

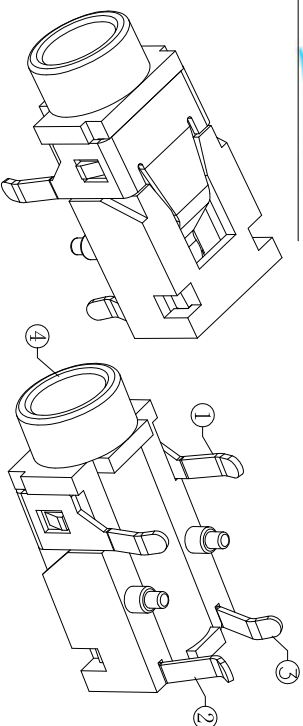

④	HOUSING	1	PBT	
③	SPRING	1	Phosphor Bronze	Sn-Plating
②	SPRING	1	Phosphor Bronze	Sn-Plating
①	CONTACT FOOT	1	Brass	Sn-Plating
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

DRAWN BY:	DATE	MAT'L	TITLE	JACK
-----------	------	-------	-------	------

Jack Lu	06/20/17		MODLE	PHONE JACK
---------	----------	--	-------	------------

CHECKED BY:	DATE	FINISH	SCALE	1 : 1
-------------	------	--------	-------	-------

Jacky Chen	06/20/17		DWG NO.	PI-3733-S124
------------	----------	--	---------	--------------

APPROVED BY:	DATE	SHEET NO.	PART NO.	PI-3733-S124
--------------	------	-----------	----------	--------------

Tony Kao	06/20/17	1 of 1		
----------	----------	--------	--	--

LONGCHUANG ZHONGYE (HK)CO.,LIMITED

TOLERANCE UNLESS
OTHERWISE STATED :
Up to 5 ± 0.2
Above 5 ~ 15 ± 0.3
Above 15 ~ 30 ± 0.4
Above 30 ~ 50 ± 0.5
Angle $\pm 0.3^\circ$

3RD.
ANGEL'S

UNITS
MM

ITEM NO.	DESCRIPTION	DRAWN	DATE	SIZE
A				A4
B				VIER
C				R
D				
E				
F				
G				
H				
I				
J				