


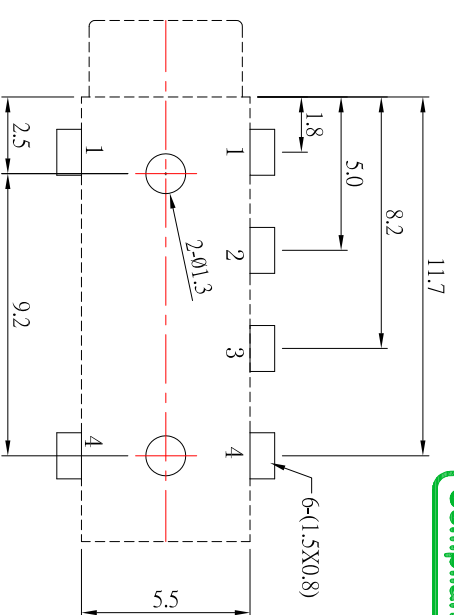
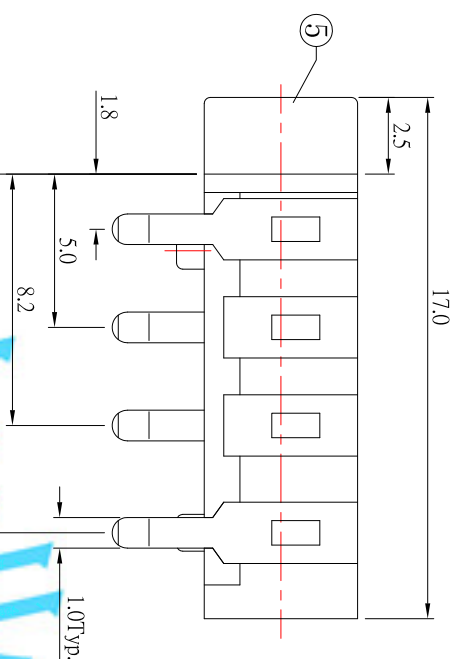
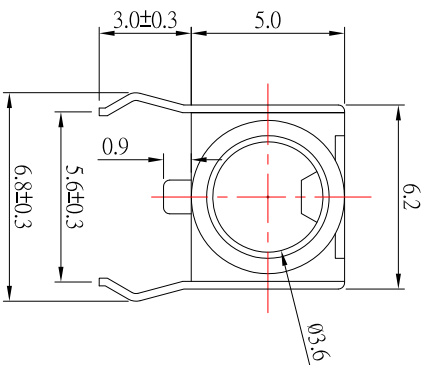


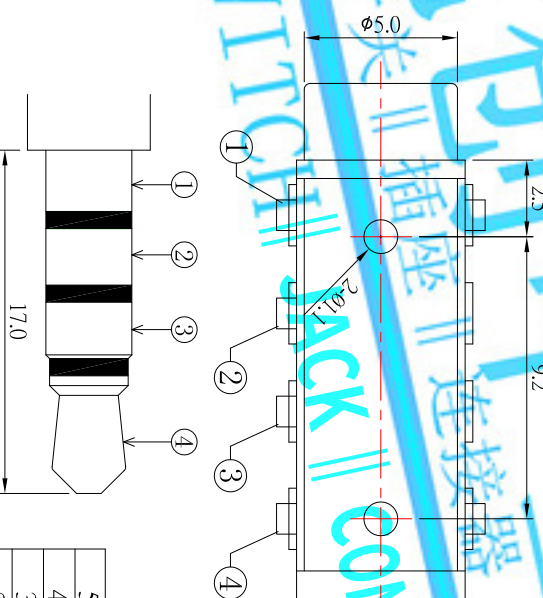

P.C.B LAYOUT
TOP VIEW

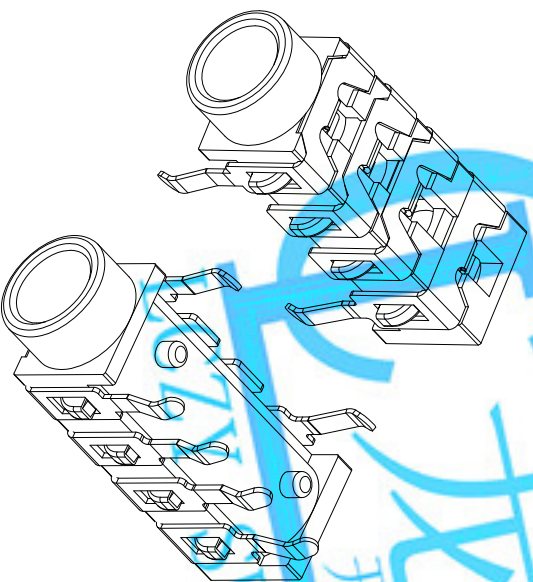

SCHEMATIC



SPECIFICATION

1. Rating : DC 30V 1.0A
2. Contact resistance : $\leq 30m\Omega$
3. Insulation resistance : $\geq 100M\Omega$
4. Withstand voltage : 500VAC
5. Insertion and extraction force : 3-20N
6. life test : 5,000 cycles

NO.	DESCRIPTION	QTY	MATERIAL	PLATING
5	HOUSING	1	PBT	
4	CONTACT FOOT	1	SUS301	Sn-Plating
3	CONTACT FOOT	1	SUS301	Sn-Plating
2	CONTACT FOOT	1	SUS301	Sn-Plating
1	CONTACT FOOT	1	SUS301	Sn-Plating

DRAWN BY:	DATE	MATL.	TITLE	JACK
-----------	------	-------	-------	------

Jack Lu	11/08/16			
---------	----------	--	--	--

CHECKED BY:	DATE	FINISH	MODLE	PHONE JACK
-------------	------	--------	-------	------------

Jacky Chen	11/08/16	SCALE	1 : 1	DWG NO. PP-D301.3B-S125
------------	----------	-------	-------	-------------------------

APPROVED BY:	DATE	SHEET NO.	1 of 1	PART NO. PP-D301.3B-S125
--------------	------	-----------	--------	--------------------------

Tony Kao	11/08/16			
----------	----------	--	--	--

LONGCHUANG ZHONGYE (HK)CO.,LIMITED

TOLERANCE UNLESS
OTHERWISE STATED :
Up to 5° ±0.2
Above 5° ~ 15° ±0.3
Above 15° ~ 30° ±0.4
Above 30° ~ 50° ±0.5
Angle ±0.3°

3RD.
ANGEL'S
UNITS
MM

ITEM NO.	DESCRIPTION	DRAWN	DATE	SIZE	VER
----------	-------------	-------	------	------	-----

1	新增PLUG顯示	Jack	11/08/16	A4	R1
---	----------	------	----------	----	----