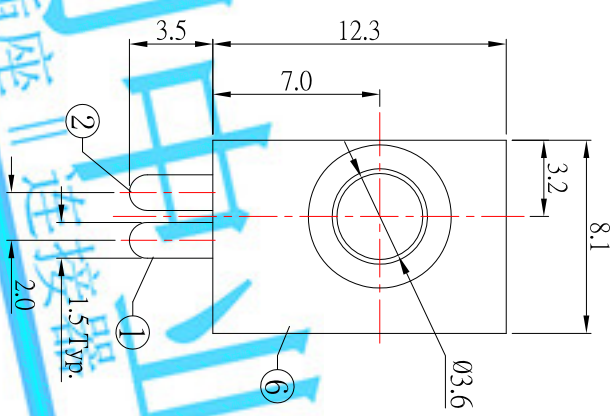
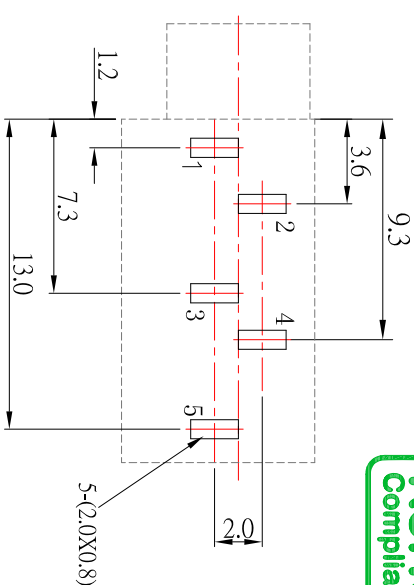


Schematic diagram of a connector. It consists of a vertical line with a horizontal arrow pointing to the right, labeled '2.0'.

## SPECIFICATION

1. Rating : DC 30V 0.5A ;
2. Contact resistance :  $\leq 0.03 \Omega$  ;
3. Insulation resistance :  $\geq 100M \Omega$  ;
4. Withstand voltage : 500VAC ;
5. Insertion and extraction force : 3-20N;
6. life test : 5,000 cycles °

|     |              |     |                 |            |
|-----|--------------|-----|-----------------|------------|
| ⑦   | COVER        | 1   | PBT             |            |
| ⑥   | HOUSING      | 1   | PBT             |            |
| ⑤   | CURVE PIECE  | 1   | BRASS           | Sn-Plating |
| ④   | SPRING PIECE | 1   | PHOSPHOR BRONZE | Sn-Plating |
| ③   | CURVE PIECE  | 1   | BRASS           | Sn-Plating |
| ②   | SPRING PIECE | 1   | PHOSPHOR BRONZE | Sn-Plating |
| ①   | FLAT PIECE   | 1   | BRASS           | Sn-Plating |
| NO. | DESCRIPTION  | QTY | MATERIAL        | PLATING    |

LONGCHUANG ZHONGYE (HK) CO., LIMITED

[illegible]