
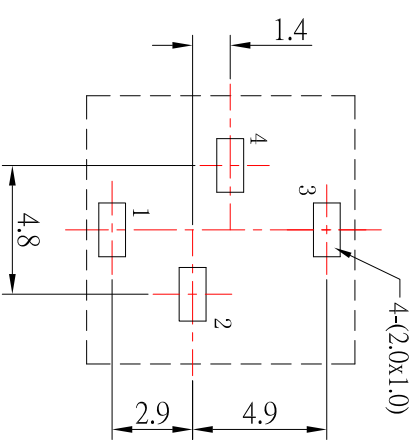
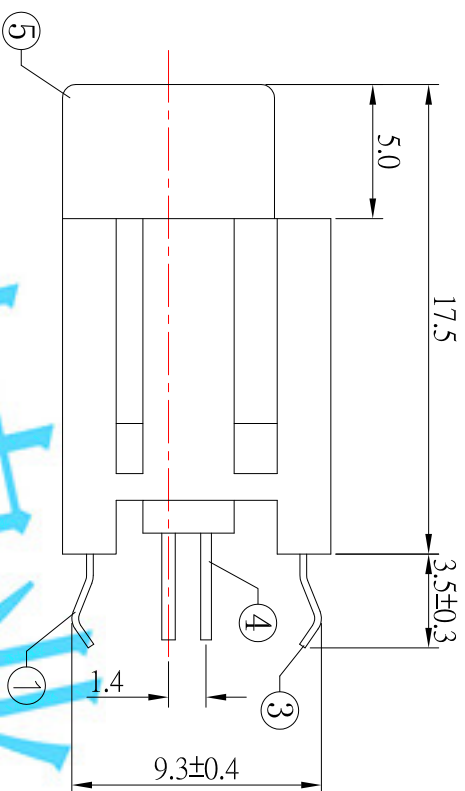




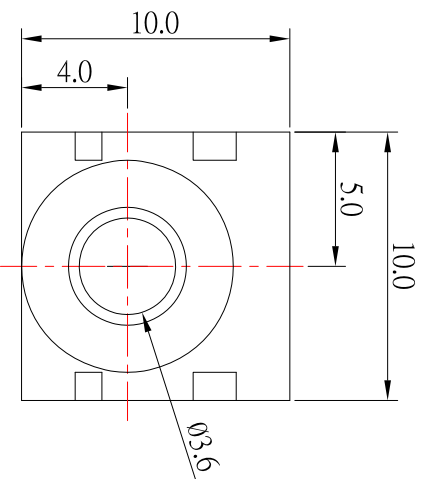


PCB LAYOUT
TOP VIEW

SPECIFICATION

1. Rating : DC 30V 0.5A ;
2. Contact resistance : $\leq 30\text{m}\Omega$;
3. Insulation resistance : $\geq 100\text{M}\Omega$;
4. Withstand voltage : 500VAC ;
5. Insertion and extraction force : 3-20N;
6. life test : 5,000 cycles °

SCHEMATIC

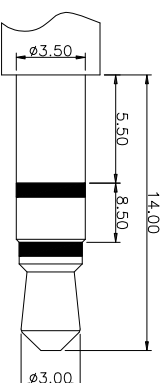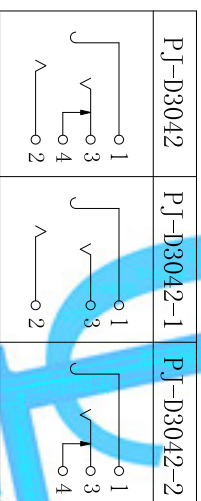

3.50mm 3 POLE PLUG

NO.	DESCRIPTION	QTY	MATERIAL	PLATING
6	COVER	1	PBT	
5	HOUSING	1	PBT	
4	FLAT PIECE	1	BRASS	Ag-Plating
3	SPRING PIECE	1	PHOSPHOR BRONZE	Ag-Plating
2	FLAT PIECE	1	BRASS	Ag-Plating
1	CONTACT FOOT	1	PHOSPHOR BRONZE	Ag-Plating

DRAWN BY:	DATE	MAT'L	TITLE	SWITCH
-----------	------	-------	-------	--------

Jack Lu	06/06/17			
---------	----------	--	--	--

CHECKED BY:	DATE	FINISH	MODLE	T/ACT SWITCH
-------------	------	--------	-------	--------------

Jacky Chen	06/06/17			
------------	----------	--	--	--

APPROVED BY:	DATE	SCALE	DWG NO.	PI-D3042-x-S124
--------------	------	-------	---------	-----------------

Tony Kao	06/06/17			
----------	----------	--	--	--

SHEET NO.	1 of 1	PART NO.	PI-D3042-x-S124	SIZE
				A4
				VIER
				R1

LONGCHUANG ZHONGYE (HK)CO.,LIMITED

TOLERANCE UNLESS
OTHERWISE STATED :
Up to 5 ± 0.2
Above 5 ~ 15 ± 0.3
Above 15 ~ 30 ± 0.4
Above 30 ~ 50 ± 0.5
Angle $\pm 0.3^\circ$

3RD.
ANGEL'S

UNITS

MM