
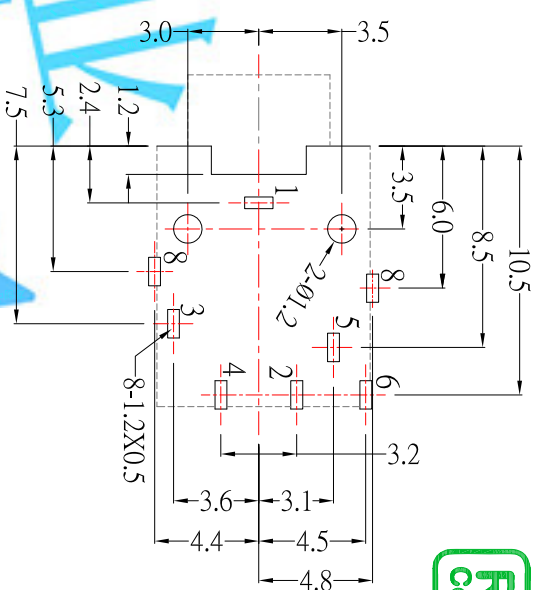
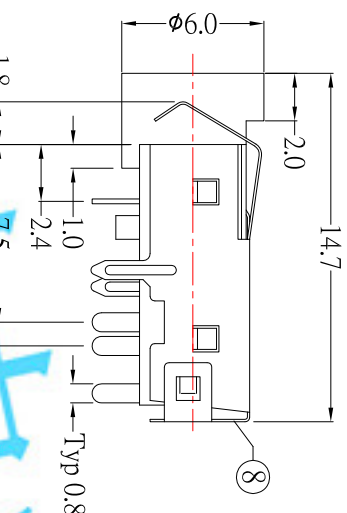
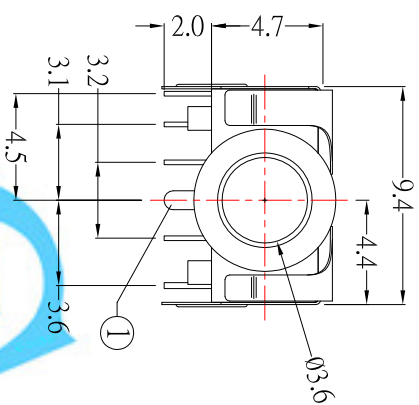


SPECIFICATION

1. Rating : DC 30V 0.5A ;
2. Contact resistance : $\leq 30\text{m}\Omega$;
3. Insulation resistance : $\geq 100\text{M}\Omega$ (DC250V) ;
4. Withstand voltage : 500VAC ;
5. Insertion and extraction force : 3-20N
6. life test : 5,000 cycles ◦

SCHEMATIC

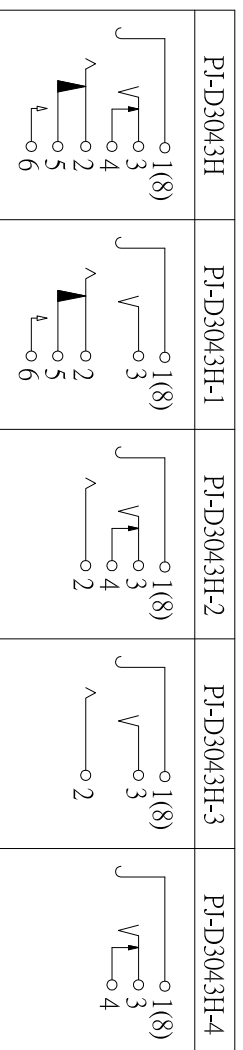

P.C.B LAYOUT MOUNTING PATTERN

(TOP VIEW)

8	COAT	1	Stainless Steel	
7	HOUSHING	1	PBT	
6	CONTACT FOOT	1	Phosphor Bronze	
5	SPRING PIECE	1	Stainless Steel	
4	CURVE PIECE	1	Brass	
3	SPRING PIECE	1	Phosphor Bronze	
2	SPRING PIECE	1	Stainless Steel	
1	CONTACT FOOT	1	Phosphor Bronze	
NO.	DESCRIPTION	QTY	MATERIAL	REMARK

LONGCHUANG ZHONGYE (HK) CO., LIMITED

TOLERANCE UNLESS OTHERWISE STATED :	Up to .5 Above .5 ~ .10 Above .15 ~ .30 Above .30 ~ .50 Above .50 ~ .75 Above .75 ~ 1.00	± 0.2 ± 0.3 ± 0.4 ± 0.5 ± 0.6 ± 0.8	3RD. ANGELS		UNITS	MM
--	---	--	----------------	---	-------	----

		LONGCHUANG ZHONGYE (HK)CO.,LIMITED										DRAWN BY:	DATE	TITLE	JACK				
												Jack Lu	04/26/13	MAT'L					
												CHECKED BY:	DATE	FINISH	MODLE	PHONE JACK			
												Jacky Chen	04/26/13	SCALE	1 : 1	DWG NO.	P1-D3043H	SIZE	
												APPROVED BY:	DATE					VER	
												Tony Kao	04/26/13	SHEET NO.	1 of 1	PART NO.	P1-D3043H	A4	
												TOLERANCE UNLESS OTHERWISE STATED :							
												Up to .5 ±0.2 Above .5 - .15 ±0.4 Above .15 - .30 ±0.4 Above .30 - .50 ±0.5 Angle 10° ±0.3"							
												3RD. ANGEL'S		UNITS	MM				
ITEM NO.	DESCRIPTION	DRAWN	DATE																

