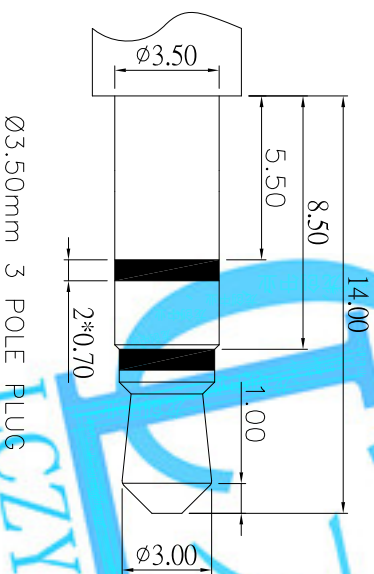
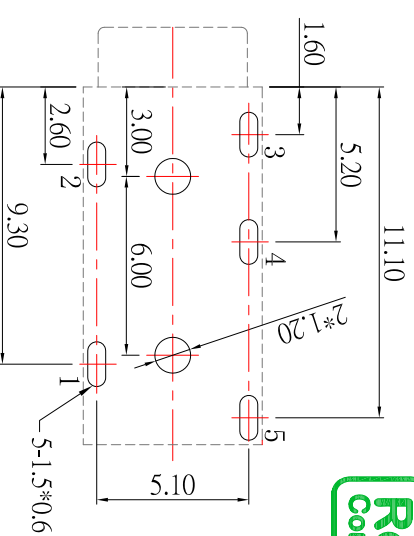
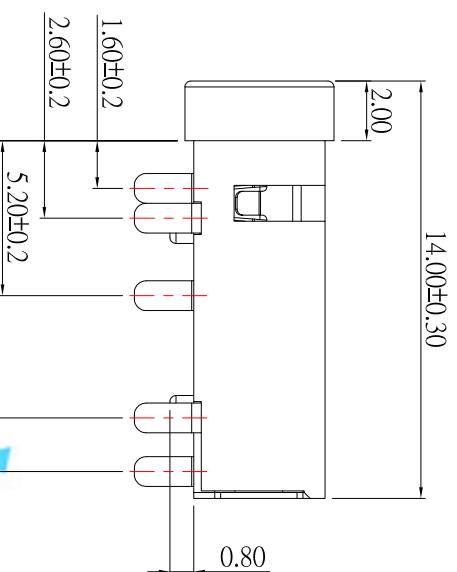
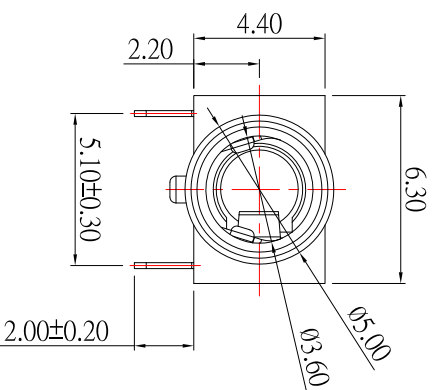


P.C.B LAYOUT MOUNTING PATTERN

SPECIFICATION

1. Rating : DC 30V 0.5A ;
2. Contact resistance : $\leq 30\text{m}\Omega$;
3. Insulation resistance : $\geq 100\text{M}\Omega$;
4. Withstand voltage : 500VAC ;
5. Insertion and extraction force : 3-20N ;
6. life test : 5,000 cycles °

SCHEMATIC

PJ-D3127	
PJ-D3127-1	
PJ-D3127-2	

6	HOUSING	1	PBT	
5	CONTACT FOOT	1	PHOSPHOR BRONZE	Au/Ag-Plating
4	CONTACT FOOT	1	PHOSPHOR BRONZE	Au/Ag-Plating
3	CONTACT FOOT	1	PHOSPHOR BRONZE	Au/Ag-Plating
2	CONTACT FOOT	1	PHOSPHOR BRONZE	Au/Ag-Plating
1	SPRING PIECE	1	PHOSPHOR BRONZE	Au/Ag-Plating
No	PART NAME	QTY	MATERIAL	REMARK

LONGCHUANG ZHONGYE (HK) CO., LIMITED

			LONGCHUANG ZHONGYE (HK) CO., LIMITED										DRAWN BY:	DATE	MAT'L		TITLE	JACK		
													Jack Lu	09/01/17						
													CHECKED BY:	DATE	FINISH		MODLE	PHONE JACK		
													Jacky Chen	09/01/17						
													APPROVED BY:	DATE	SCALE	I : 1	DWG NO.	P1-D3127-A-S124		
													Tony Kao	09/01/17		SHEET NO.	1 of 1	PART NO.	P1-D3127-A-S124	