
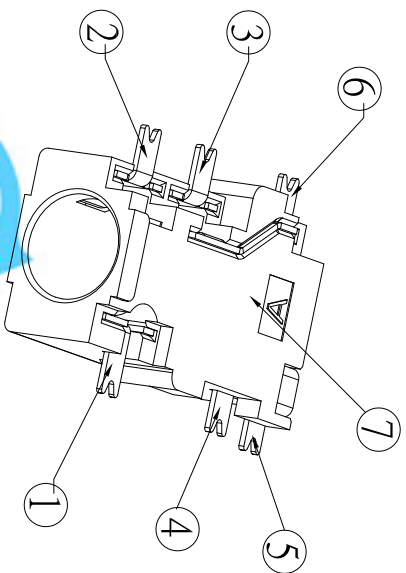
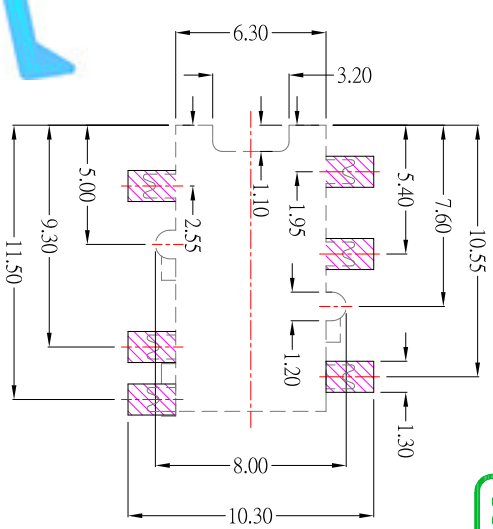
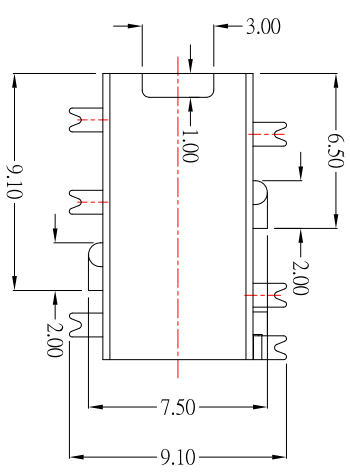
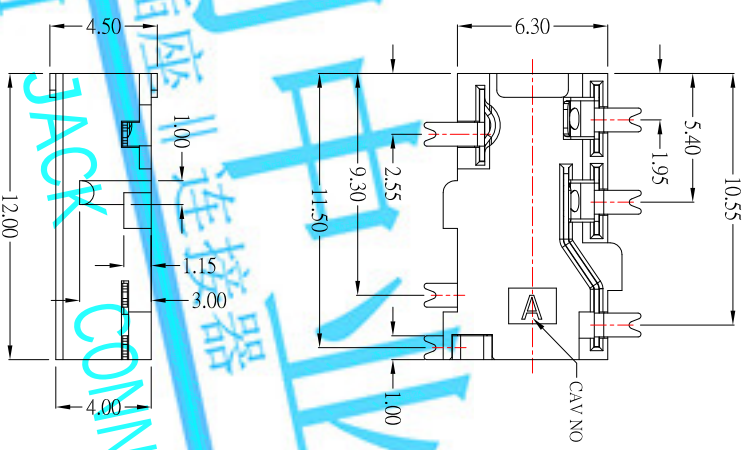


PI-0238-41-S119	PI-0238-61-S119	PI-0238-51-S119

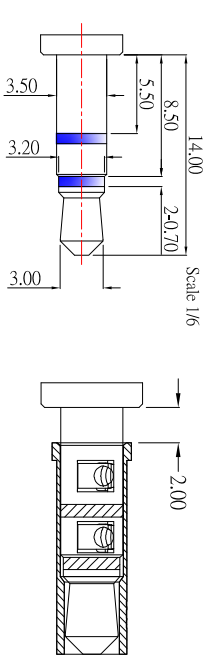

- SPECIFICATIONS:**
1. CONTACT CURRENT RATING: 0.5A.
 2. CONTACT RESISTANCE: 50 mΩ MAX.;
 3. INSULATION RESISTANCE: 100MΩ MIN.;
 4. DIELECTRIC WITHSTANDING: 500V AC MIN.;
 5. CONNECTOR MATING FORCES: 29.4N (3.00kgf) MAX.;
 6. CONNECTOR UNMATING FORCES: 2.94N(0.30kgf) MIN.

ITEM	PART NAME	QTY	MATERIAL	REMARK
⑦	HOUSING	1	HIGHT TEMPERATURE PLASTIC	
⑥	CONTACT F1	1	BRASS	
⑤	CONTACT E1	1	BRASS	
④	CONTACT D1	1	BeCu	
③	CONTACT C1	1	BeCu	
②	CONTACT C1	1	BeCu	
①	CONTACT B	1	PHOSPHOR BRONZE	

LONGCHUANG ZHONGYE (HK)CO.,LIMITED

ITEM NO.	DESCRIPTION	DRAWN	DATE	APPROVED BY:	DATE	SHEET NO.	PART NO.	SIZE
1	更新物料规格	Jack	122314	Jacky Chen	09/07/16	1 of 1	PI-0238-xx-S119	A4
2	更新物料规格	Jack	010914	Jacky Chen	09/07/16	1 of 1	PI-0238-xx-S119	A4
3	更新物料规格	Jack	090716	Jacky Chen	09/07/16	1 of 1	PI-0238-xx-S119	A4
4	更新物料规格	Jack	090716	Jacky Chen	09/07/16	1 of 1	PI-0238-xx-S119	A4
5	更新物料规格	Jack	090716	Jacky Chen	09/07/16	1 of 1	PI-0238-xx-S119	A4
6	更新物料规格	Jack	090716	Jacky Chen	09/07/16	1 of 1	PI-0238-xx-S119	A4
7	更新物料规格	Jack	090716	Jacky Chen	09/07/16	1 of 1	PI-0238-xx-S119	A4