

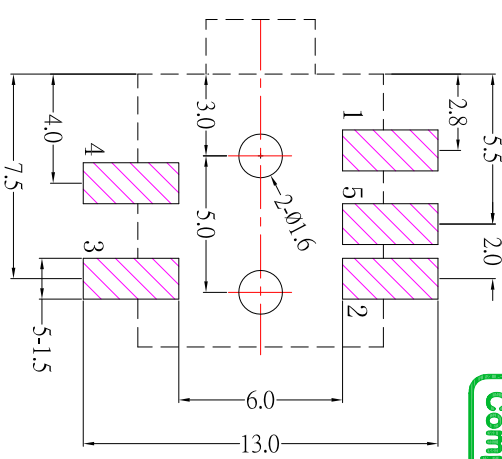
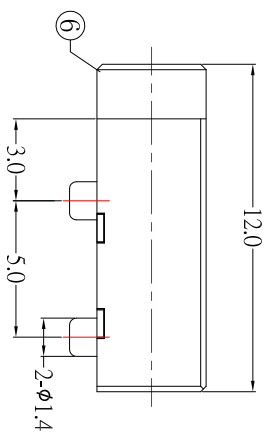
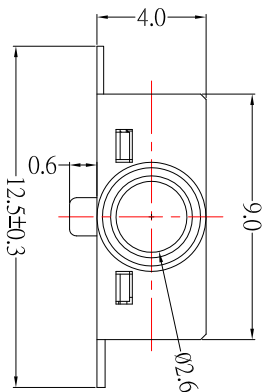
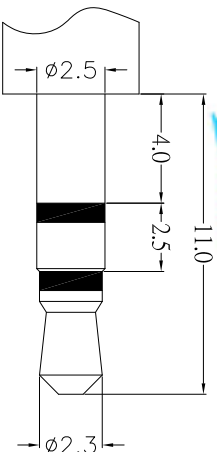


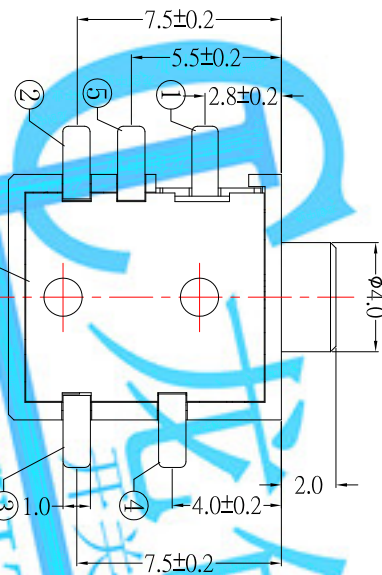

P.C.B LAYOUT MOUNTING PATTERN
(TOP VIEW)

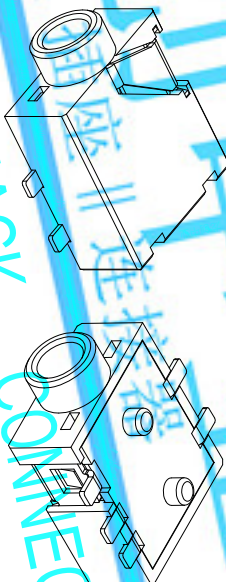

Ø2.50mm 3 POLE PLUG

SPECIFICATION

- 1.Rating : DC 30V 0.5A ;
- 2.Contact resistance : ≤ 30mΩ ;
- 3.Insulation resistance : ≥ 100MΩ ;
- 4.Withstand voltage : 500VAC ;
- 5.Insertion and extraction force : 3-20N
- 6.life test : 5,000 cycles .

MODEL NO.	PI-2595-S124	PI-2594A-S124	PI-2594B-S124	PI-2593-S124
SCHEMATIC				

7	COVER	1	PA9T	
6	HOUSING	1	PA9T	
5	5# CONTACT FOOT	1	BRASS	Au-Plating
4	4# CONTACT FOOT	1	BRASS	Au-Plating
3	3# CONTACT FOOT	1	PHOSPHOR BRONZE	Au-Plating
2	2# CONTACT FOOT	1	PHOSPHOR BRONZE	Au-Plating
1	1# CONTACT FOOT	1	PHOSPHOR BRONZE	Au-Plating
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

DRAWN BY:	DATE	MAT'L	TITLE	JACK
-----------	------	-------	-------	------

Jack Lu	03/15/18			
---------	----------	--	--	--

CHECKED BY:	DATE	FINISH	MODLE	PHONE JACK
-------------	------	--------	-------	------------

Jacky Chen	03/15/18			
------------	----------	--	--	--

APPROVED BY:	DATE	SCALE	DWG NO.	PI-259X-S124
--------------	------	-------	---------	--------------

Tony Kao	03/15/18	SHEET NO.	1 of 1	PART NO. PI-259X-S124
----------	----------	-----------	--------	-----------------------

LONGCHUANG ZHONGYE (HK)CO.,LIMITED

TOLERANCE UNLESS
OTHERWISE STATED :
Up to 5° ±0.2°
Above 5° ~ 15° ±0.3°
Above 15° ~ 30° ±0.4°
Above 30° ~ 50° ±0.5°
Angle ±0.3°

3RD. ANGEL'S	UNITS	MM
-----------------	-------	----

ITEM NO.

DESCRIPTION

DRAWN

DATE

JACK

03/15/18

DATE

DATE

DATE

