

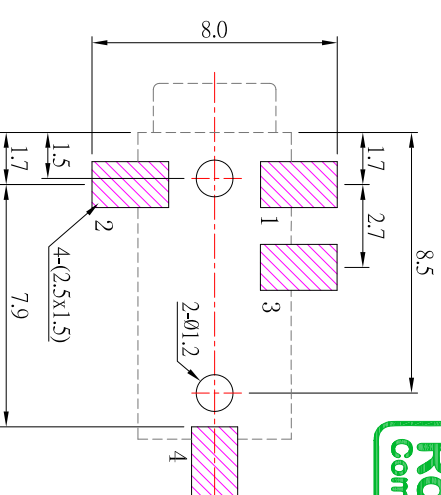
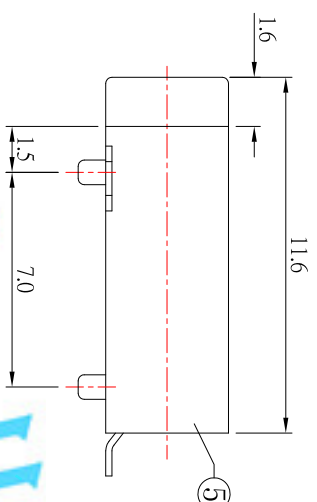







SCHEMATIC

PJ-2683-S125	PJ-2684-S125

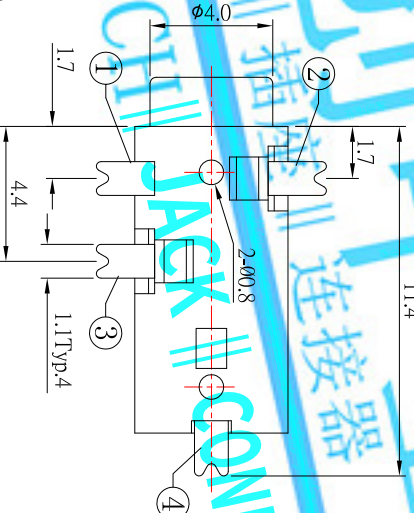

SPECIFICATION

- 1.Rating : DC 30V 0.5A ;
- 2.Contact resistance : $\leq 0.03\Omega$;
- 3.Insulation resistance : $\geq 100M\Omega$ (DC250V) ;
- 4.Withstand voltage : 500VAC ;
- 5.Insertion and extraction force : 3-20N;
- 6.life test : 5,000 cycles ◦

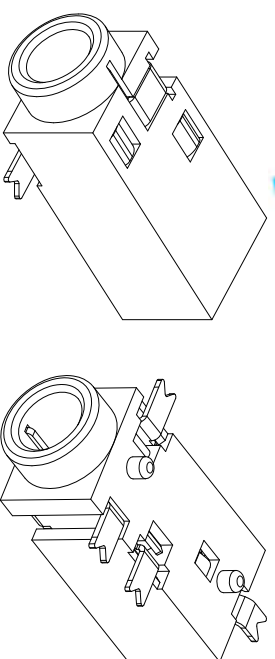

LONGCHUANG ZHONGYE (HK)CO.,LIMITED

ITEM NO.	DESCRIPTION	DRAWN	DATE	TOLERANCE UNLESS OTHERWISE STATED : Angle	3RD. ANGEL'S	UNITS	MM	DATE	MAT'L	FINISH	SCALE	SHEET NO.	PART NO.	SIZE
1	标准插拔指示	Jack	05/18/16	Up to 5° ±0.2 Above 5° ~ 15° ±0.3 Above 15° ~ 30° ±0.4 Above 30° ~ 50° ±0.5 Angle ±0.3							1 : 1	1 of 1	PJ-268x-S125	A4 VER A1