

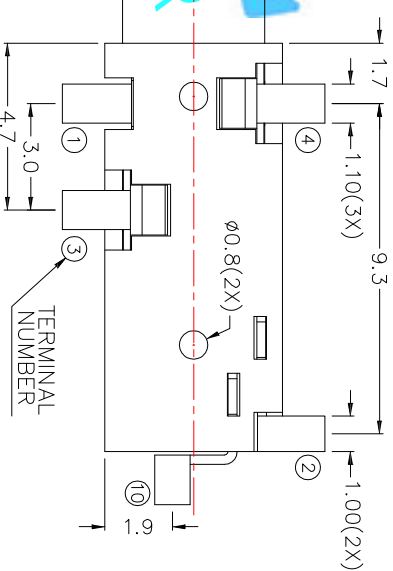


TERMINAL 1 : PHOSPHOR BRONZE
TERMINAL 2 : PHOSPHOR BRONZE
TERMINAL 3 : PHOSPHOR BRONZE
TERMINAL 4 : PHOSPHOR BRONZE
TERMINAL 10 : BRASS
HOUSING : PA6T

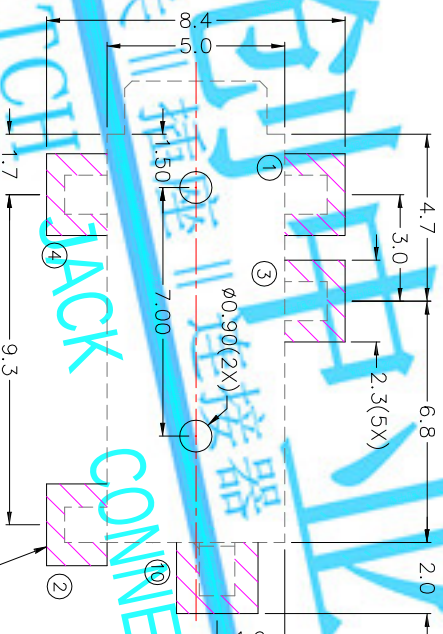

RECOMMENDED
SOLDER PAD LAYOUT

1. Rating : DC 12V 1.0A
2. Contact resistance : $\leq 50\text{m}\Omega$
3. Insulation resistance : $\geq 100\text{M}\Omega$
4. Withstand voltage : 500VAC
5. Insertion and extraction force : 3-50N
6. life test : 5,000 cycles



MODEL NO.	PJ-2765D	PJ-2764D	PJ-2764AD
SCHMATIC			

LONGCHUANG ZHONGYE (HK) CO., LIMITED

[illegible]