
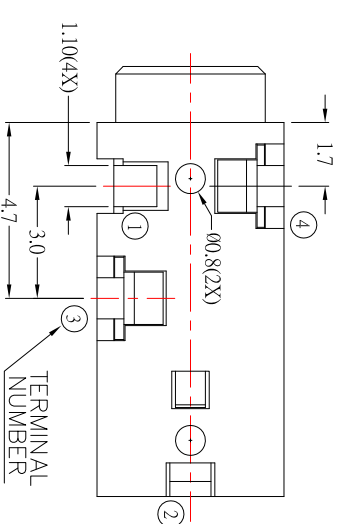
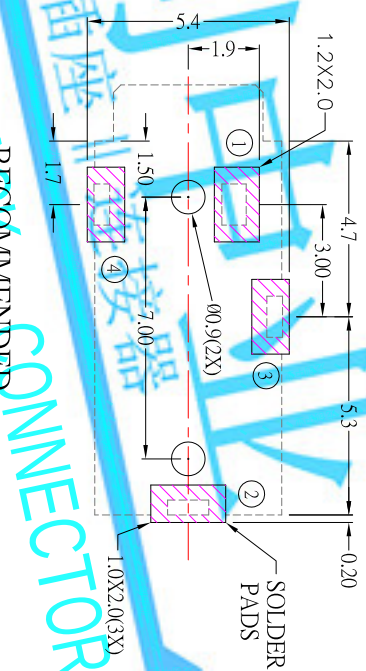

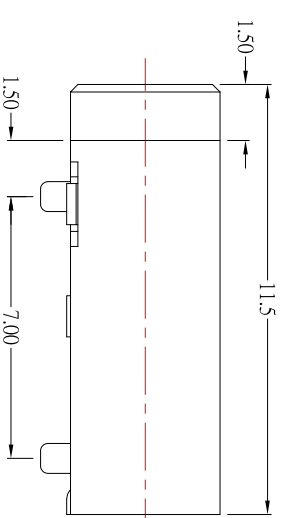


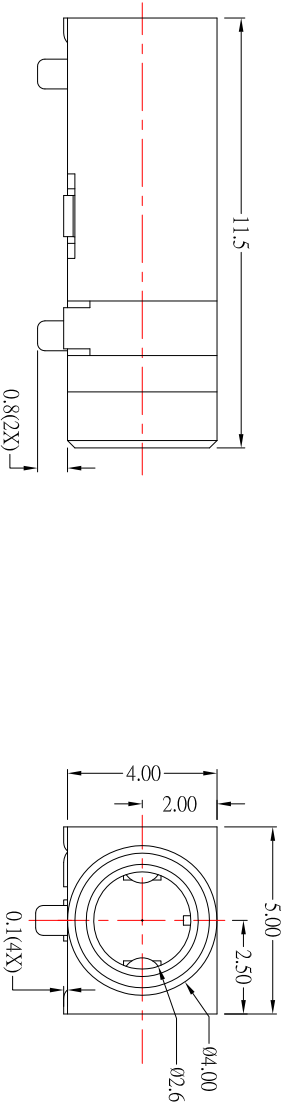

ø2.5 MATE PLUG

RECOMMENDED OLDER PAD LAYOUT

SPECIFICATION

1. Rating : DC 12V 1.0A
2. Contact resistance : $\leq 50\text{m}\Omega$
3. Insulation resistance : $\geq 100\text{M}\Omega$
4. Withstand voltage : 500VAC
5. Insertion and extraction force : 3-30N
6. life test : 5,000 cycles

*MATERIAL

- TERMINAL 1 :PHOSPHOR BRONZE
TERMINAL 2 :PHOSPHOR BRONZE
TERMINAL 3 :PHOSPHOR BRONZE
TERMINAL 4 :PHOSPHOR BRONZE
HOUSING :PA6T

MODEL NO.	PJ-2784D	PJ-2783D
SCHEMATIC		

LONGCHUANG ZHONGYE (HK) CO., LIMITED

[illegible]