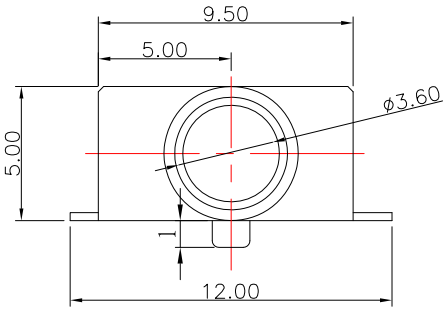

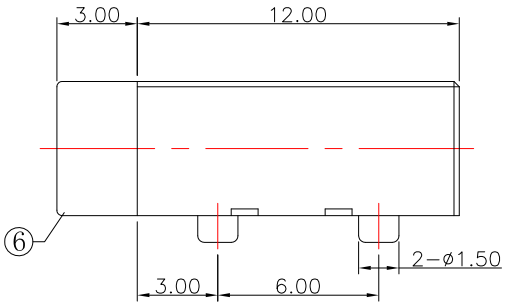

P.C.B LAYOUT
TOP VIEW

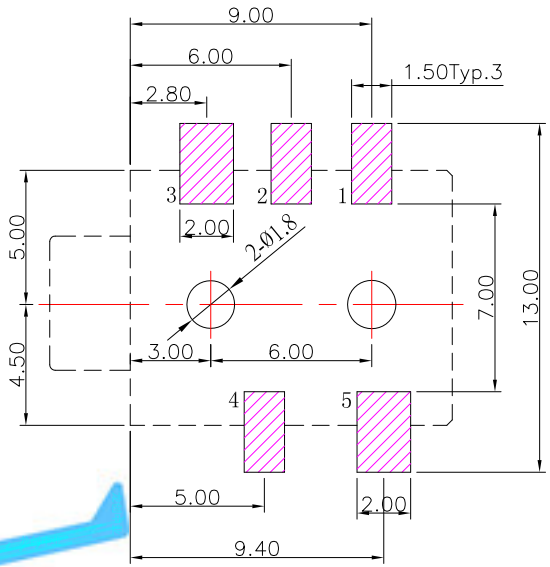

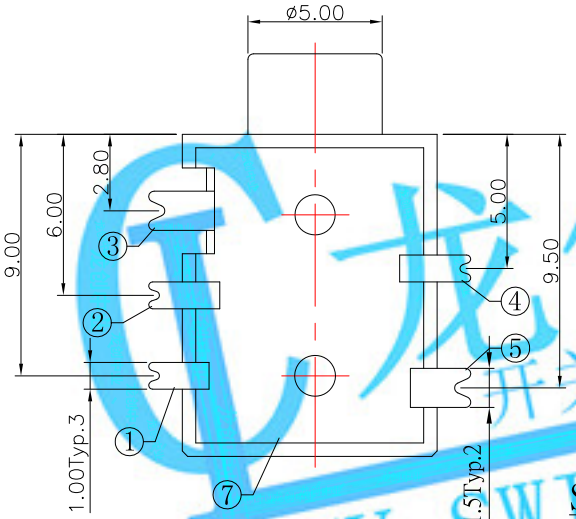

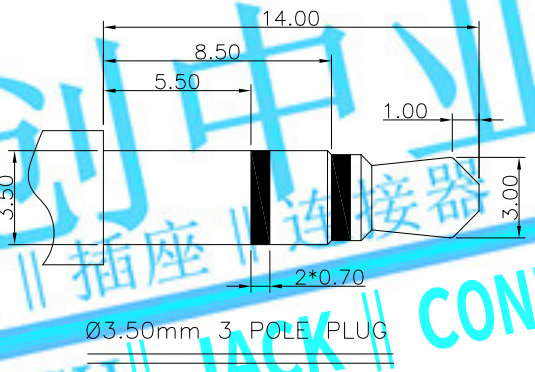

SCHEMATIC

SCHEMATIC	PJ-3675D	PJ-3674BD	PJ-3674AD	PJ-3673D	PJ-3673AD
					

SPECIFICATION

1.Rating ：DC 30V 0.5A；

2.Contact resistance：≤0.03Ω；

3.Insulation resistance：≥100MΩ (DC250V)；

4.Withstand voltage：500VAC ；

5.Insertion and extraction force：3-30N;

6.life test：5,000 cycles。

NO.	DESCRIPTION	QTY	MATERIAL	PLATING
7	COVER	1	PA9T	
6	HOUSING	1	PA9T	
5	SPRING	1	BRONZE	Au-Plating
4	CONTACT FOOT	1	BRASS	Au-Plating
3	CONTACT FOOT	1	BRONZE	Au-Plating
2	CONTACT FOOT	1	BRASS	Au-Plating
1	SPRING	1	BRONZE	Au-Plating

ITEM NO.	DESCRIPTION	DRAWN	DATE

LONGCHUANG ZHONGYE (HK)CO.,LIMITED

TOLERANCE UNLESS OTHERWISE STATED : Up to 5 ±0.2; Above 5 ~ 15 ±0.3; Above 15 ~ 30 ±0.4; Above 30 ~ 50 ±0.5; Angle ±0.3°

3RD. ANGEL'S | UNITS MM

DRAWN BY: Jack Lu	DATE 10/17/12	MAT'L		TITLE	JACK
CHECKED BY: Jacky Chen	DATE 10/17/12	FINISH		MODLE	PHONE JACK
APPROVED BY: Tony Kao	DATE 10/17/12	SCALE	1 : 1	DWG NO.	PJ-367xD-S125
		SHEET NO.	1 of 1	PART NO.	PJ-367xD-S125

SIZE A4 | VER R

龙创中业 开关 || 插座 || 连接器 LCZY SWITCH || JACK || CONNECTOR