

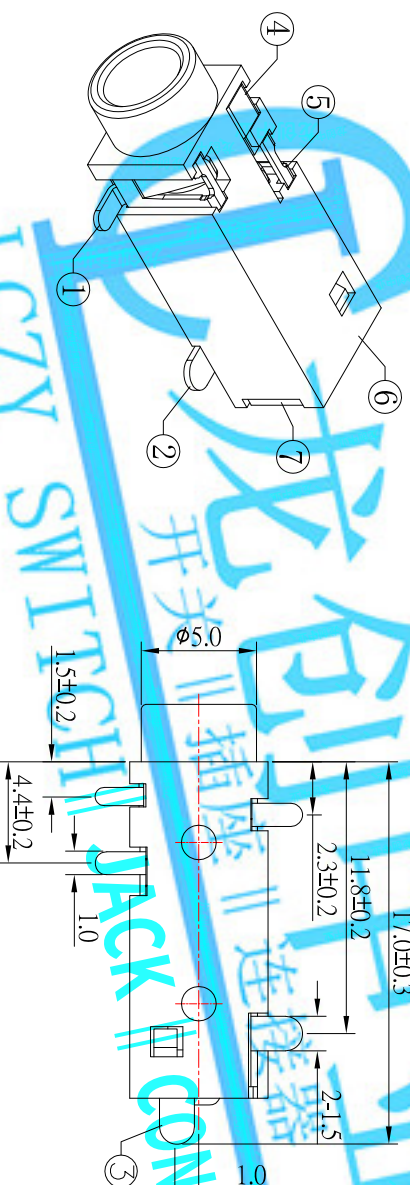
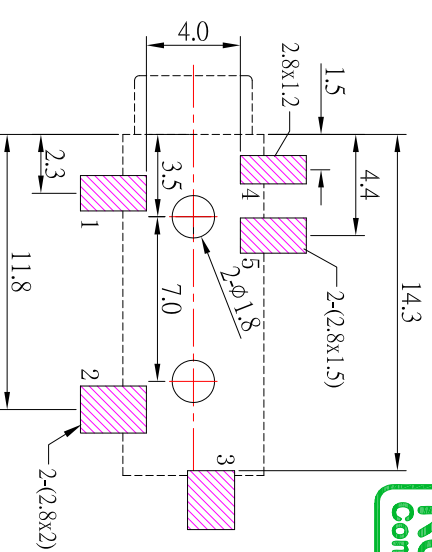
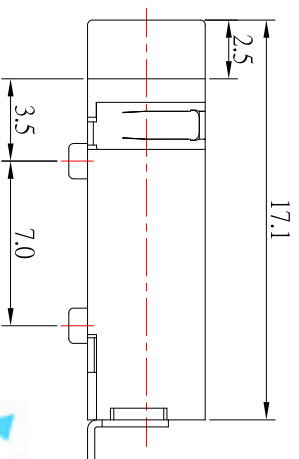


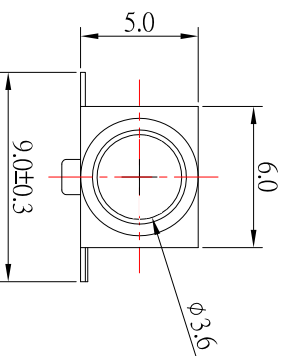

SCHEMATIC

PI-3695	PI-3694B	PI-3694A	PI-3693

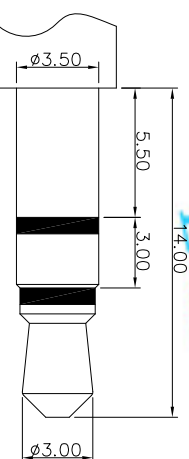

Ø3.50mm 3 POLE PLUG

LONGCHUANG ZHONGYE (HK) CO., LIMITED

7			
3	更新尺寸	lack	1001191
2	更新圖面	lack	0527109
1	更新為A08E	lack	092317
ITEM NO.	DESCRIPTION	DEAWN	DATE

TOLERANCE UNLESS OTHERWISE STATED:	0p to 5 Above 5 - 15 Above 15 - 30 Above 30 - 50 Above 50 - 75 Above 75 - 100	±0.2 ±0.1 ±0.4 ±0.4 ±0.4 ±0.3	3RD. ANGELS		UNITS	MM
------------------------------------	--	--	----------------	---	-------	----

7	COVERING	1	PA9T	
6	HOUSING	1	PA9T	
5	#5 CONTACT FOOT	1	SUS	Ag-Plating
4	#4 CONTACT FOOT	1	PHOSPHOR BRONZE	Ag-Plating
3	#3 CONTACT FOOT	1	BRASS	Ag-Plating
2	#2 CONTACT FOOT	1	PHOSPHOR BRONZE	Ag-Plating
1	#1 CONTACT FOOT	1	SUS	Ag-Plating
NO.	DESCRIPTION	QTY	MATERIAL	PLATING
DRAWN BY:	DATE	MAT'L	TITLE	JACK
Jack Lu	10/01/19			
CHECKED BY:	DATE	FINISH	MODEL	3.5mm PHONE JACK
Jacky Chen	10/01/19			
APPROVED BY:	DATE	SCALE	DWG NO.	PI-369x-S124
Tony Kao	10/01/19	SHEET NO.	1 of 1	PART NO. PI-369x-S124
				SIZE
				A4
				VER
				R3

SPECIFICATIONS:

1. Rating : DC 30V , 1.0A ;
2. Contact Resistance : $\leq 30\text{m}\Omega$ Max;
3. Insulation Resistance : $\geq 100\text{M}\Omega$ Min ;
4. Withstand voltage : 500VAC
5. Insertion and extraction force : 3-20N
6. Life test : 5,000 cycles

