

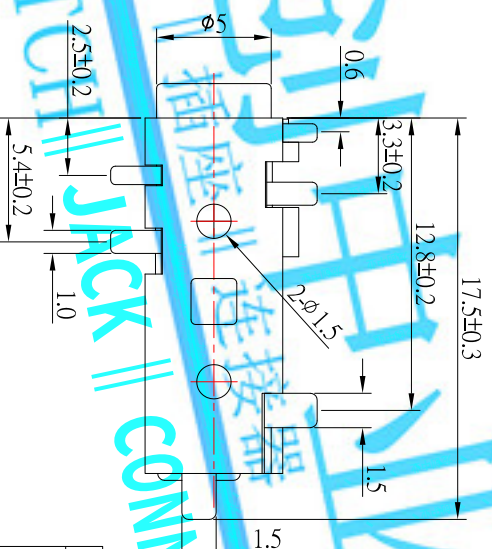
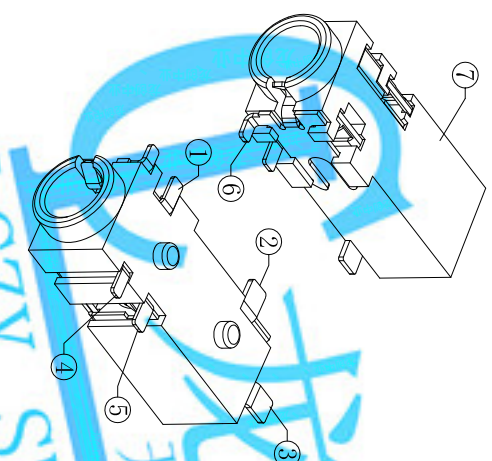
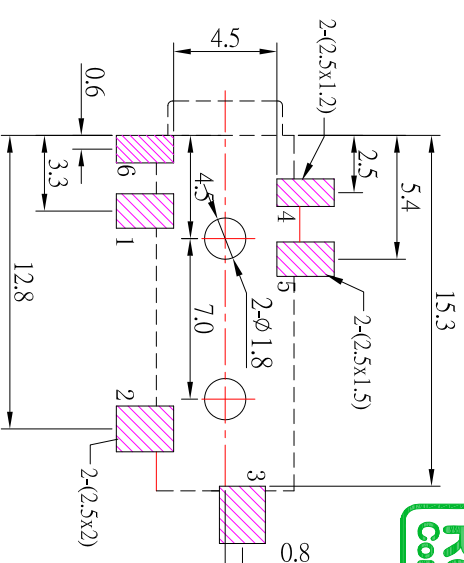
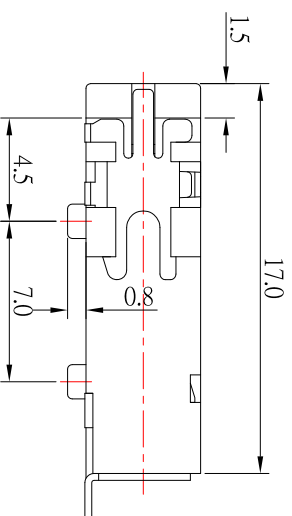




SCHEMATIC					
PJ-3756	PJ-3755	PJ-3755A	PJ-3754	PJ-3755B	PJ-3753

SPECIFICATION

- 1.Rating : DC 30V 1.0A ;
- 2.Contact resistance : $\leq 30m\Omega$;
- 3.Insulation resistance : $\geq 100M\Omega$;
- 4.Withstand voltage : 500VAC ;
- 5.Insertion and extraction force : 3-20N;
- 6.life test : 5,000 cycles .

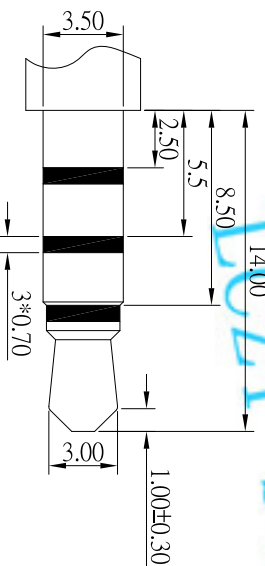

ø3.50mm 4 POLE PLUG

LONGCHUANG ZHONGYE (HK)CO.,LIMITED

7	HOUSING	1	PA9T	
6	6# CONTACT FOOT	1	PHOSPHOR BRONZE	Ag-Plating
5	5# CONTACT FOOT	1	Be-Cu	Ag-Plating
4	4# CONTACT FOOT	1	PHOSPHOR BRONZE	Ag-Plating
3	3# CONTACT FOOT	1	BRASS	Ag-Plating
2	2# CONTACT FOOT	1	PHOSPHOR BRONZE	Ag-Plating
1	1# CONTACT FOOT	1	Be-Cu	Ag-Plating
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

DRAWN BY:

DATE

Jack Lu

05/07/19

MATL.

FINISH

CHECKED BY:

Jacky Chen

05/07/19

SCALE

1 : 1

APPROVED BY:

Tony Kao

05/07/19

SHEET NO.

1 of 1

PART NO.

PJ-375x-S124

TITLE

JACK

MODLE

PHONE JACK

DWG NO.

PJ-375x-S124

SIZE

A4

VIER

R2

ITEM NO.	A	B	C	D	E	F	G	H	I	J
1	更新尺寸	Jack	050719							
2	更新為A4版	Jack	050217							
	DESCRIPTION	DRAWN	DATE							