
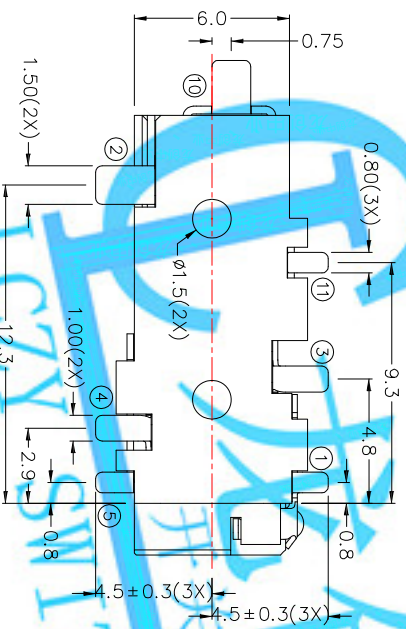


TERMINAL 1 :PHOSPHOR BRONZE
TERMINAL 2 :PHOSPHOR BRONZE
TERMINAL 3 :PHOSPHOR BRONZE
TERMINAL 4 :PHOSPHOR BRONZE
TERMINAL 5 :PHOSPHOR BRONZE
TERMINAL 10 :BRASS
TERMINAL 11 :BRASS
HOUSING :PA6T

1. Rating : DC 12V 1.0A
2. Contact resistance : $\leq 50\text{m}\Omega$
3. Insulation resistance : $\geq 100\text{M}\Omega$
4. Withstand voltage : 500VAC
5. Insertion and extraction force : 3-30N
6. life test : 5,000 cycles

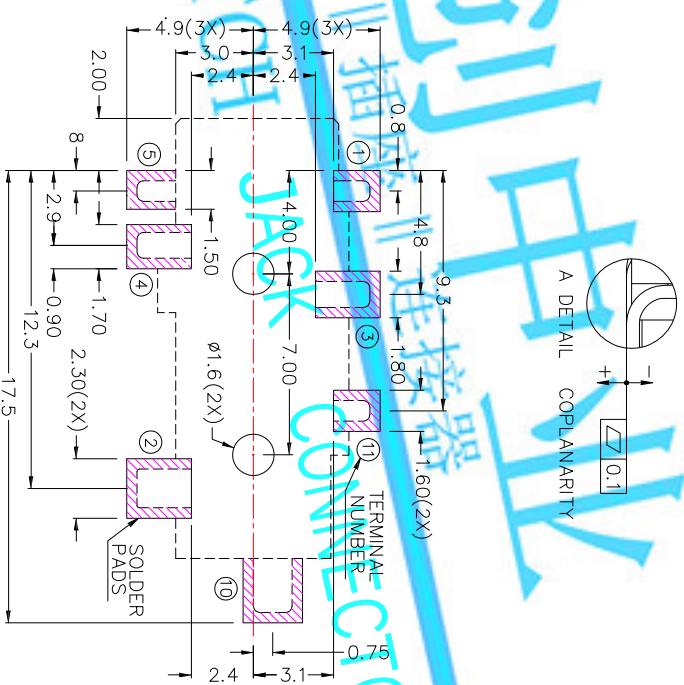

MODEL NO.	PJ-3827D	PJ-3825D
SCHEMATIC		

RECOMMENDED
SOLDER PAD LAYOUT
(TOP VIEW)

LONGCHUANG ZHONGYE (HK)CO.,LIMITED

			LONGCHUANG ZHONGYE (HK)CO.,LIMITED										DRAWN BY: DATE		MAYTL		TITLE JACK							
													Jack Lu 11/03/15		FINISH		MODLE PHONE JACK							
													CHECKED BY: DATE											
2													Jacky Chen 11/03/15		SCALE		1 : 1		DWG NO. P1-382XD					
																			SIZE A4					
1													TOLERANCE UNLESS OTHERWISE STATED : Angie		3RD. ANGEL'S				UNITS		MM		VIER	
													APPROVED BY: DATE		SHEET NO.		1 of 1		PART NO. P1-382XD					
ITEM NO.													Tony Kao 11/03/15											
													DRAWN		DATE									
													DESCRIPTION											