

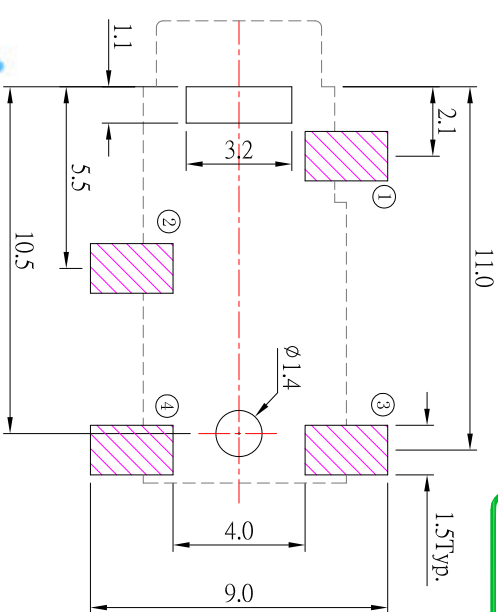
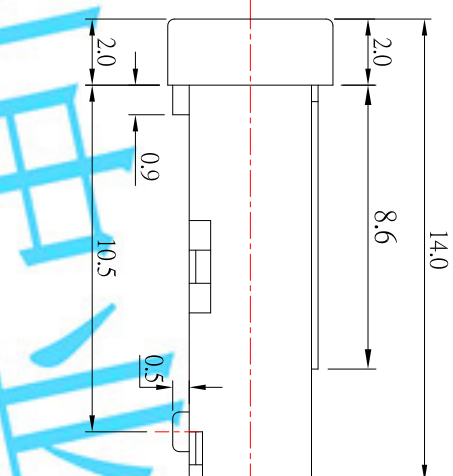


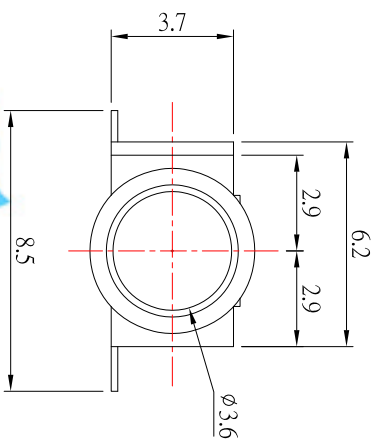

SCHEMATIC


P1-3854D-S124	P1-3853D-S124

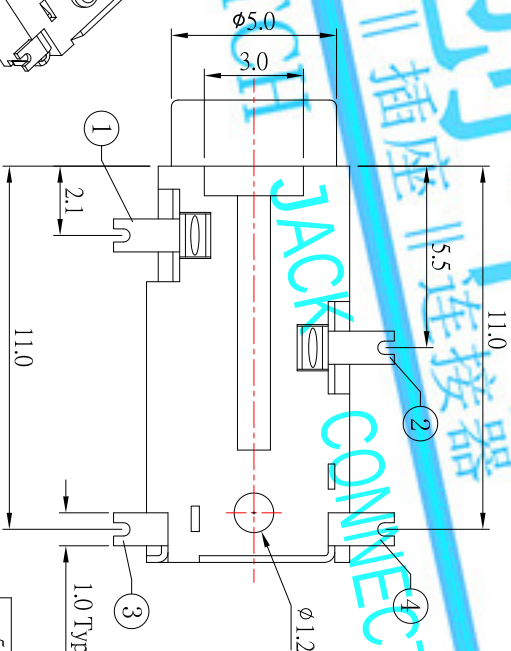

P.C.B LAYOUT TOP VIEW

SPECIFICATION

- 1.Rating : DC 30V , 0.5A
- 2.Contact resistance : $\leq 30\text{m}\Omega$
- 3.Insulation resistance : $\geq 100\text{M}\Omega$
- 4.Withstand voltage : 500VAC
- 5.Insertion and extraction force : 3-20N
- 6.life test : 5,000 cycles

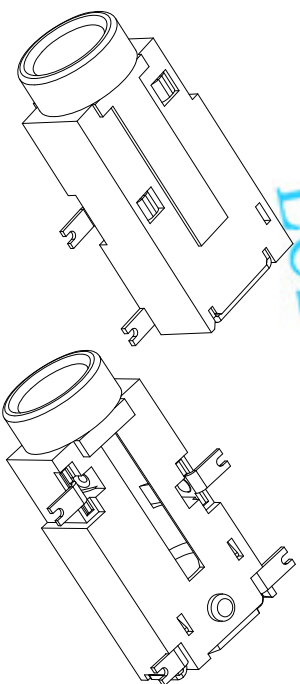

LONGCHUANG ZHONGYE (HK)CO.,LIMITED

NO.	DESCRIPTION	QTY	MATERIAL	PLATING
5	HOUSING	1	PA9T	
4	CONTACT FOOT	1	BRASS	Ag-Pt-Plating
3	CONTACT FOOT	1	SUS	Ag-Pt-Plating
2	CONTACT FOOT	1	PHOSPHOR BRONZE	Ag-Pt-Plating
1	SPRING PIECE	1	PHOSPHOR BRONZE	Ag-Pt-Plating

DRAWN BY:

Jack Lu

DATE

01/18/19

MATL.

FINISH

TITLE

JACK

MODLE

PHONE JACK

DWG NO.

PF-385XD-S124

PART NO.

PF-385XD-S124

SIZE

A4

VER

R1

CHECKED BY:

Jacky Chen

DATE

01/18/19

SCALE

1 : 1

SHEET NO.

1 of 1

PART NO.

PF-385XD-S124

SIZE

A4

VER

R1

APPROVED BY:

Tony Kao

DATE

01/18/19

SHEET NO.

1 of 1

PART NO.

PF-385XD-S124

SIZE

A4

VER

R1

TOLERANCE UNLESS
OTHERWISE STATED:

Up to 5
Above 5 ~ 15
Above 15 ~ 30
Above 30 ~ 50
Angle

4.02
1.03
1.03
1.03
1.03

3RD.
ANGEL'S

UNITS

MM

APPROVED BY:

Tony Kao

DATE

01/18/19

SHEET NO.

1 of 1

PART NO.

PF-385XD-S124

SIZE

A4

VER

R1