
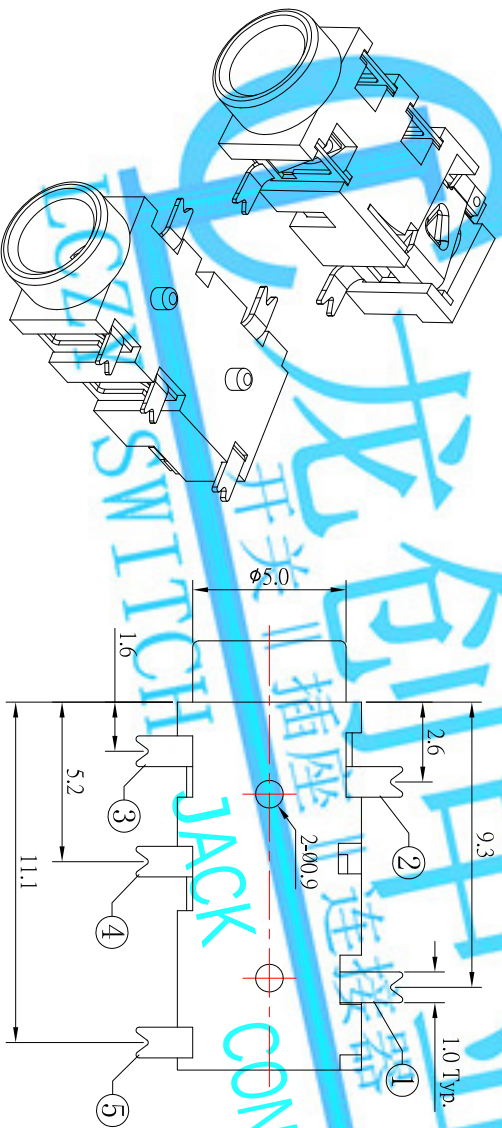
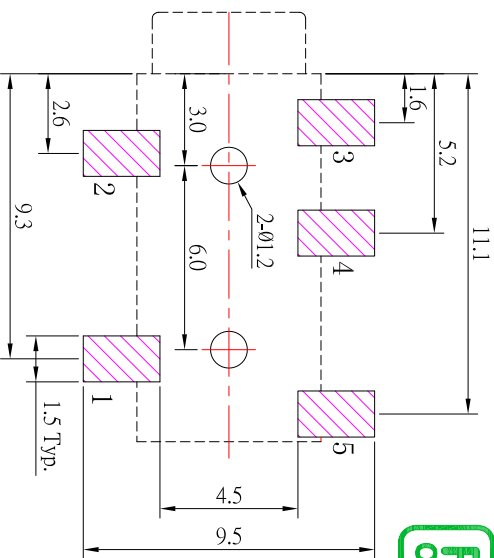
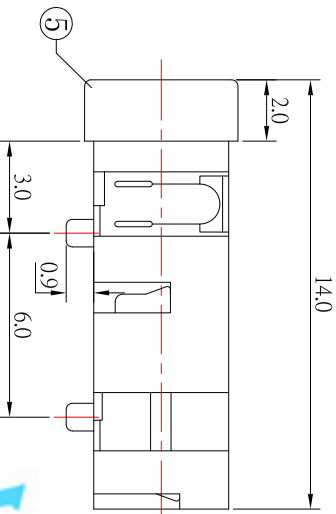


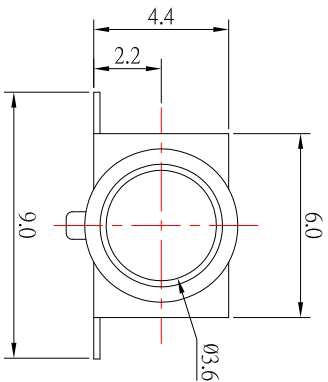

SCHEMATIC

PJ-3865D-S125	PJ-3863D-S125	PJ-3863AD-S125	PJ-3864D-S125	PJ-3864AD-S125

P.C.B LAYOUT

SPECIFICATON

- 1.Rating : DC 30V 0.5A
- 2.Contact resistance : $\leq 50m\Omega$
- 3.Insulation resistance : $\geq 100M\Omega$
- 4.Withstand voltage : 500VAC
- 5.Insertion and extraction force : 3-30N
- 6.life test : 5,000 cycles

NO.	DESCRIPTION	QTY	MATERIAL
6	HOUSING	1	PA9T
5	CURVE PIECE	1	BRASS
4	CONTACT FOOT	1	SUS301
3	CONTACT FOOT	1	SUS301
2	CONTACT FOOT	1	SUS301
1	SPRING PIECE	1	BE-CU
NO.	DESCRIPTION	QTY	MATERIAL

DRAWN BY:	DATE	MATL.	TITLE
Jack Lu	08/05/14		JACK

CHECKED BY:	DATE	FINISH	MODLE
Jacky Chen	08/05/14		PHONE JACK

APPROVED BY:	DATE	SCALE	DWG NO.
Tony Kao	08/05/14	1 : 1	PJ-386xD-S125

DATE	SHEET NO.	PART NO.	SIZE
08/05/14	1 of 1	PJ-386xD-S125	A4

DATE	SHEET NO.	PART NO.	SIZE
08/05/14	1 of 1	PJ-386xD-S125	A0

LONGCHUANG ZHONGYE (HK)CO.,LIMITED

TOLERANCE UNLESS
OTHERWISE STATED :
Up to 5 ± 0.2
Above 5 ~ 15 ± 0.3
Above 15 ~ 30 ± 0.4
Above 30 ~ 50 ± 0.5
Angle $\pm 0.3^\circ$

3RD.
ANGEL'S

UNITS
MM

ITEM NO.	DESCRIPTION	DRAWN	DATE
1	更新圖面	Jack	05/9/14
2	更新SPEC及材質	Jack	06/9/14
3	更新尺寸8.72x9.0	Jack	08/01/14
4	更新圖面	Jack	08/05/14