

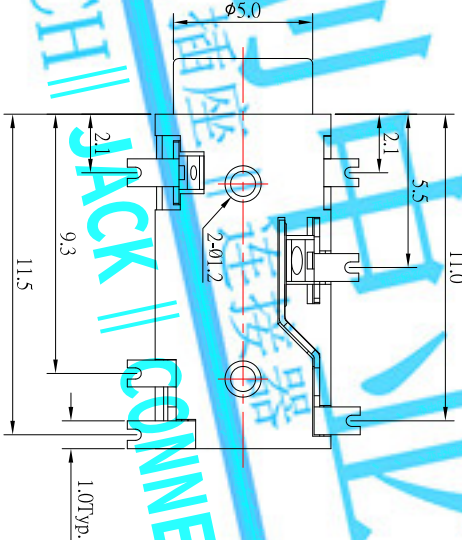
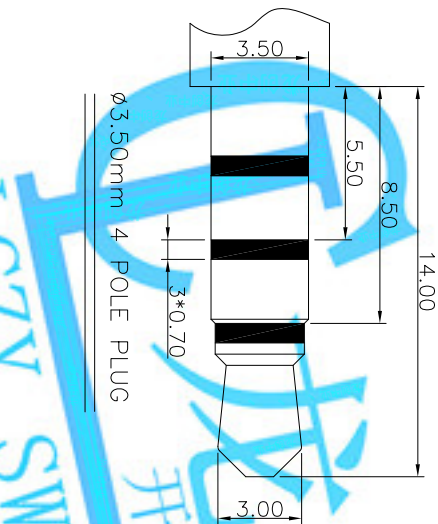
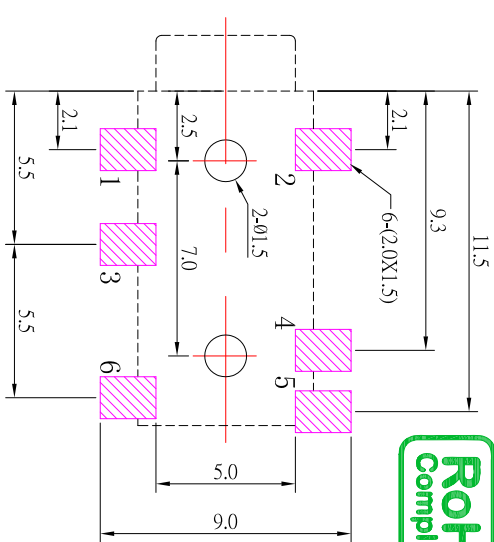
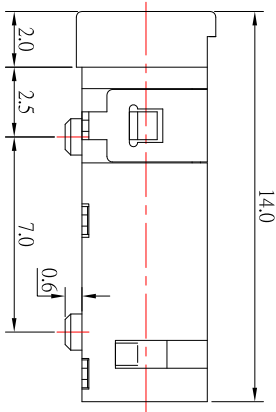
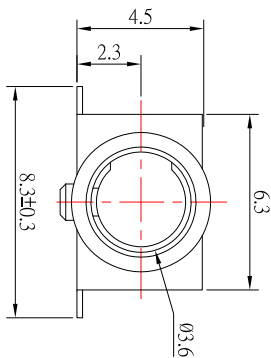
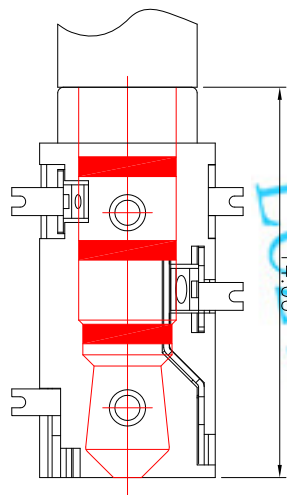




PI-3896D	PI-3893AD	PI-3893D	PI-3894D	PI-3895AD	PI-3895BD



- SPECIFICATION**
1. Rating : DC 30V 0.5A
 2. Contact resistance : $\leq 30m\Omega$
 3. Insulation resistance : $\geq 100M\Omega$
 4. Withstand voltage : 500VAC
 5. Insertion and extraction force : 3-30N
 6. life test : 5,000 cycles °

NO.	DESCRIPTION	QTY	MATERIAL
7	HOUSING	1	PA9T
6	6# CONTACT FOOT	1	BRASS
5	5# CONTACT FOOT	1	PHOSPHOR BRONZE
4	4# CONTACT FOOT	1	PHOSPHOR BRONZE
3	3# CONTACT FOOT	1	PHOSPHOR BRONZE
2	2# CONTACT FOOT	1	PHOSPHOR BRONZE
1	1# CONTACT FOOT	1	PHOSPHOR BRONZE

DRAWN BY:	DATE	MATL.	TITLE	JACK
Jack Lu	06/08/17	FINISH	MODLE	PHONE JACK

CHECKED BY:	DATE	SCALE	DWG NO.	PART NO.
Jacky Chen	06/08/17	1 : 1	DWG NO.	PI-389XD-S124

APPROVED BY:	DATE	SHEET NO.	1 of 1
Tony Kao	06/08/17		

LONGCHUANG ZHONGYE (HK)CO.,LIMITED

ITEM NO.	A	B	C	D	E	F	G	H	I	J
1	新增加示意图	Jack	06/08/17	06/08/17	06/08/17	06/08/17	06/08/17	06/08/17	06/08/17	06/08/17
2	更新版本号	Jack	06/08/17	06/08/17	06/08/17	06/08/17	06/08/17	06/08/17	06/08/17	06/08/17
DESCRIPTION	Jack	06/08/17	06/08/17	06/08/17	06/08/17	06/08/17	06/08/17	06/08/17	06/08/17	06/08/17
TOLERANCE UNLESS OTHERWISE STATED :	UP to 5	±0.2	±0.3	±0.4	±0.5	±0.6	±0.7	±0.8	±0.9	±1.0
Angle	3RD.	ANGEL'S	UNITS	MM	APPROVED BY:	DATE	SHEET NO.	1 of 1	PART NO.	PI-389XD-S124
SIZE	A4	VIER	A1							