
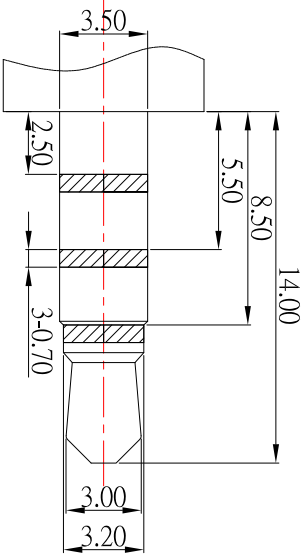
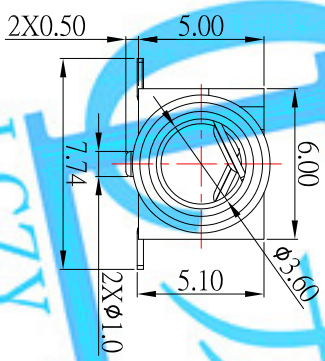

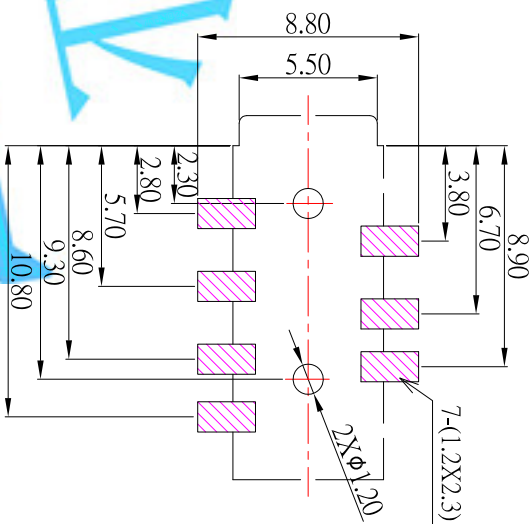
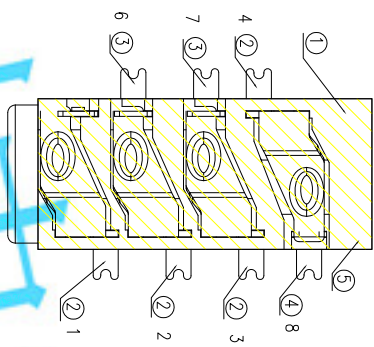


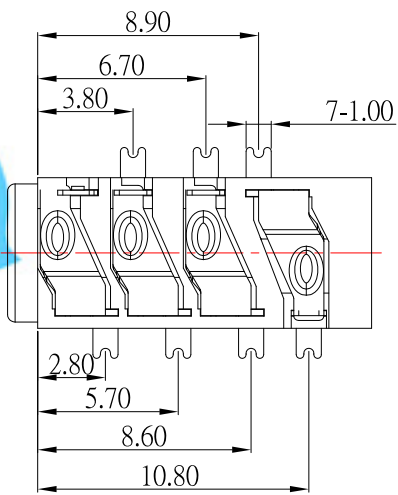

PLUG SPEC

NOTES:

1. ELECTRICAL CHARACTERISTICS:

1-1 CONTACT RESISTANCE: 50mΩ MAX. (INITIAL)
100mΩ MAX. (FINAL)

1-2. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR ONE MINUTE.

1-3. INSULATION RESISTANCE: 100MΩ MIN. MEASURED BY 500V DC

2. MECHANICAL CHARACTERISTICS:

2-1. PLUG INSERTION FORCE: 0.3~3.0KGS.

2-2. PLUG WITHDRAWAL FORCE: 0.3~3.0KGS.

3. DURABILITY TEST: 5,000 CYCLES.

Model No.	PJ-3917D-S214
Schematic code	

ITEM	DESCRIPTIONs	MATERIAL	FINISH	Q'TY
⑥	MYLAR			1
④	CONTACT 3	PHOSPHOR BRONZE	GOLD FLASH	1
③	CONTACT 2	PHOSPHOR BRONZE	GOLD FLASH	2
②	CONTACT 1	PHOSPHOR BRONZE	GOLD FLASH	4
①	HOUSING	PA9T	BLACK	1

DRAWN BY:

Jack Lu

CHECKED BY:

Jacky Chen

APPROVED BY:

Tony Kao

DATE

05/16/18

DATE

05/16/18

DATE

05/16/18

MAT'L

FINISH

SCALE

SHEET NO.

1 of 1

PART NO.

TITLE

MODLE

DWG NO.

PART NO.

PJ-3917D-S214

JACK

PHONE JACK

PHONE JACK

PHONE JACK

PHONE JACK

SIZE

A4

VIER

R3

LONGCHUANG ZHONGYE (HK)CO.,LIMITED

TOLERANCE UNLESS
OTHERWISE STATED :
Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGELS

UNITS

MM

DATE

05/16/18

05/16/18

05/16/18

05/16/18

05/16/18

05/16/18

05/16/18

05/16/18

05/16/18

05/16/18

05/16/18