

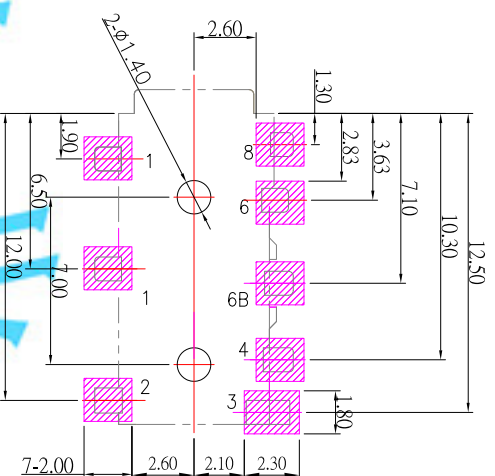

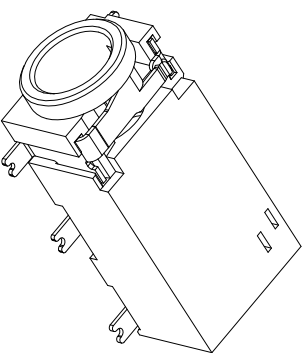


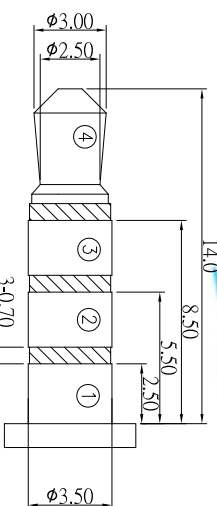

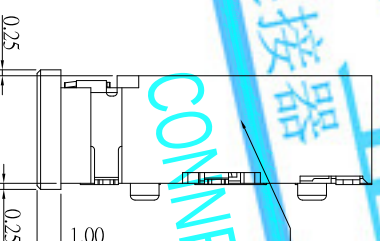


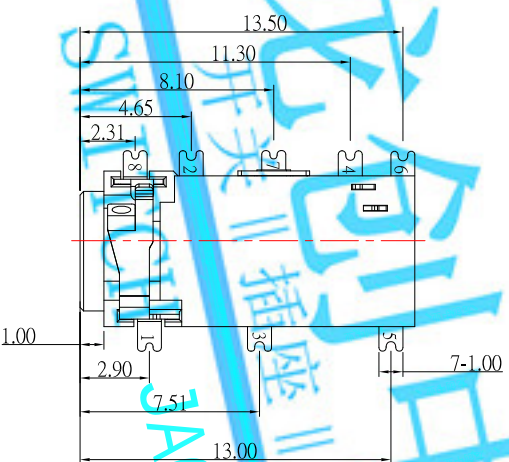

- SPECIFICATIONS:**
1. ELECTRICAL CHARACTERISTICS:
 - 1-1. RATING:12V AC, 1A DC.
 - 1-2. CONTACT RESISTANCE: 150mΩ MAX.
 - 1-3. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR ONE MINUTE.
 - 1-4. INSULATION RESISTANCE: 100MΩ MIN. MEASURED BY 500 VDC
 2. MECHANICAL CHARACTERISTICS:
 - 2-1. INSERTION FORCE : 0.5~3.0 KGF
 - 2-2. WITHDRAWAL FORCE : 0.5~2.0 KGF
 3. LIFE TEST: 5,000 CYCLES MIN.

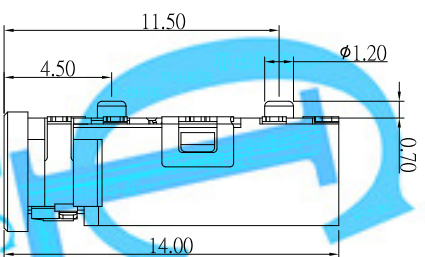

NO.	Part Name	QTY	Description	Plated/Color	Note
1	TERMINAL A	1	C5210R-H	Plated Au	
2	TERMINAL B	1	TM04	Plated Au	
3	TERMINAL C	1	C5210R-H	Plated Au	
4	TERMINAL D	1	C5210R-H	Plated Au	
5	TERMINAL E	1	C5210R-H	Plated Au	
6	TERMINAL F	1	C5210R-H	Plated Au	
7	TERMINAL F	1	C5210R-H	Plated Au	
8	TERMINAL F	1	C5210R-H	Plated Au	
9	HOUSING	1	PA9Y1+30%G.F	Plated Au	Color: BLACK (UL90AV)

(Ø3.50mm 4 POLE PLUG DETAIL DRAWING)

LONGCHUANG ZHONGYE (HK) CO., LIMITED

[illegible]