
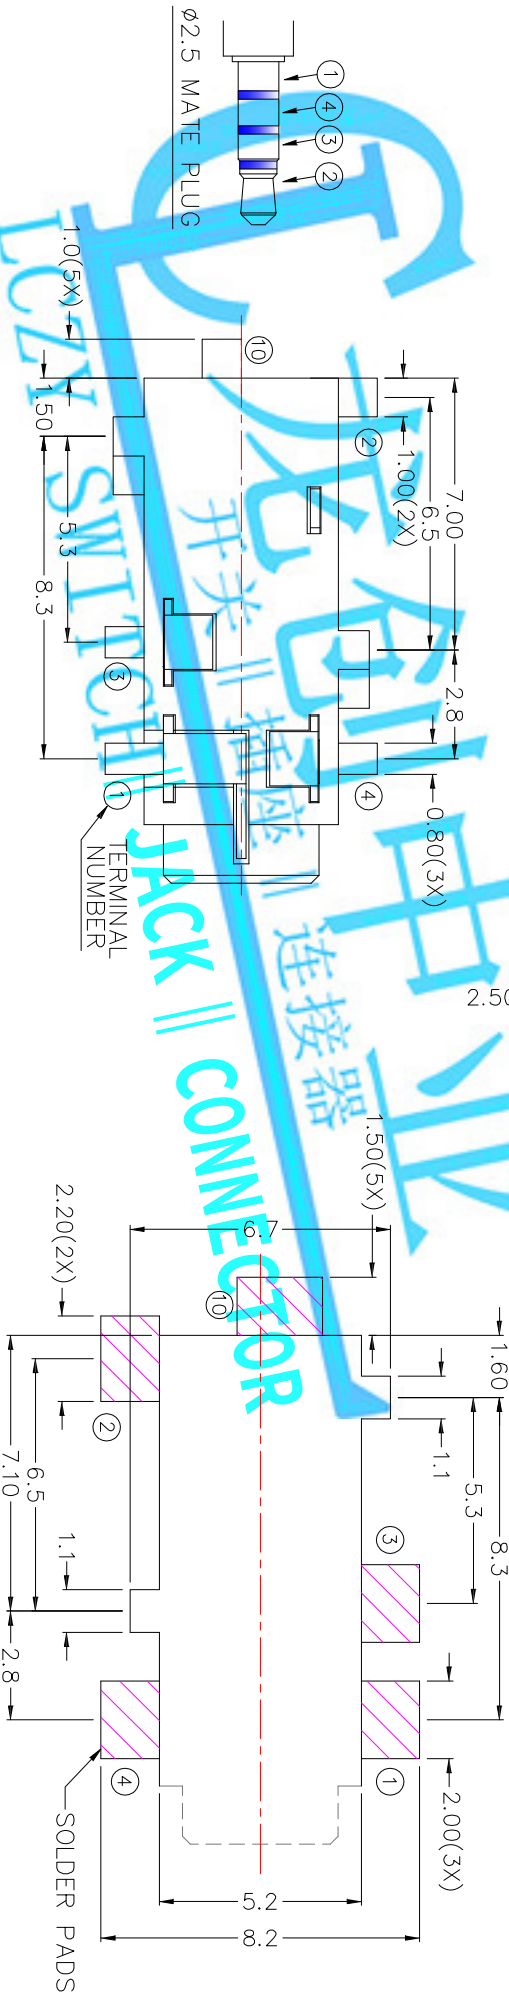
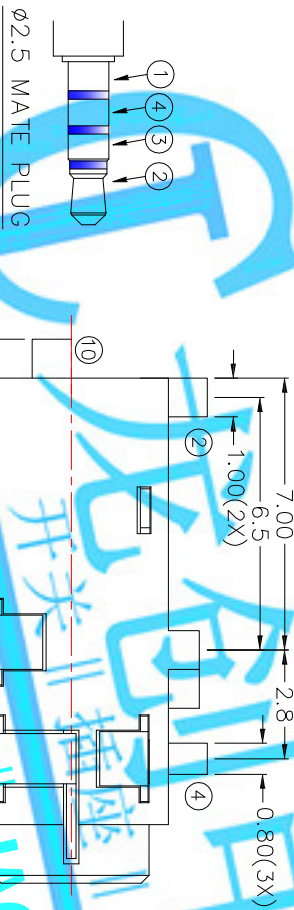
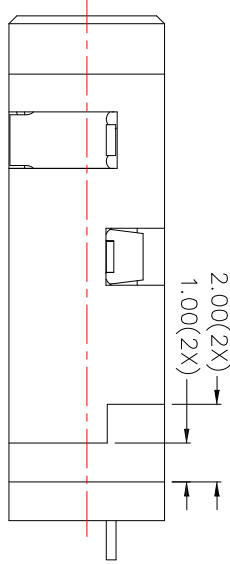
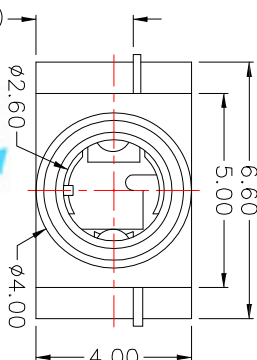


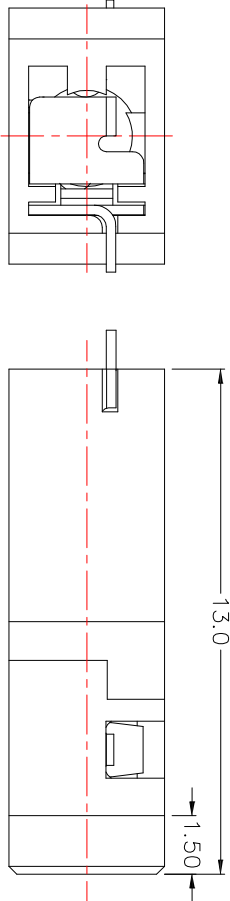

MODEL NO.	PJ-2775D	PJ-2774D	PJ-2774AD
SCHEMATIC			

- SPECIFICATION**
- 1.Rating : DC 12V 1.0A
 - 2.Contact resistance : $\leq 50m\Omega$
 - 3.Insulation resistance : $\geq 100M\Omega$
 - 4.Withstand voltage : 500VAC
 - 5.Insertion and extraction force : 3-30N
 - 6.life test : 5,000 cycles

- RECOMMENDED
SOLDER PAD LAYOUT**
- *MATERIAL**
- TERMINAL 1 : PHOSPHOR BRONZE
TERMINAL 2 : PHOSPHOR BRONZE
TERMINAL 3 : PHOSPHOR BRONZE
TERMINAL 4 : PHOSPHOR BRONZE
TERMINAL 10:BRASS
HOUSING : PA6T

LONGCHUANG ZHONGYE (HK)CO.,LIMITED

			LONGCHUANG ZHONGYE (HK)CO.,LIMITED					DRAWN BY: Jack Lu		DATE 11/04/15	MAT'L	TITLE JACK	SIZE A4	
								CHECKED BY: Jacky Chen		DATE 11/04/15	FINISH	MODLE PHONE JACK	VER R1	
								APPROVED BY: Tony Kao		DATE 11/04/15	SCALE 1 : 1	DWG NO. PJ-277XD		
											SHEET NO. 1 of 1	PART NO. PJ-277XD		
												</		