
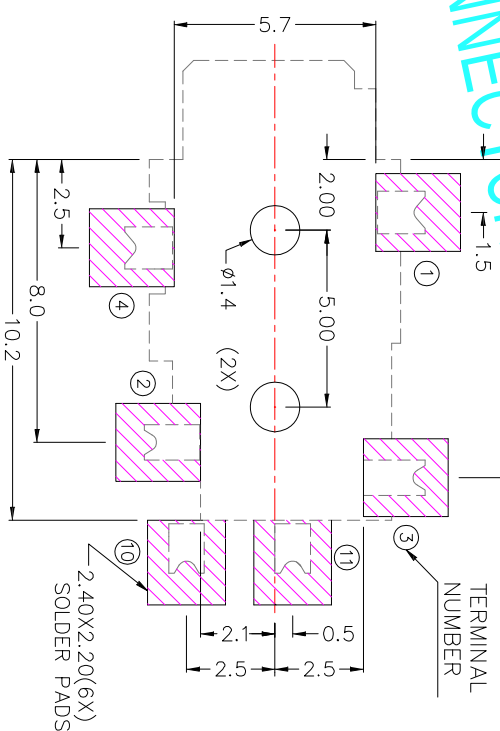


1. Rating : DC 12V 1.0A
2. Contact resistance : $\leq 50\text{m}\Omega$
3. Insulation resistance : $\geq 100\text{M}\Omega$
4. Withstand voltage : 500VAC
5. Insertion and extraction force : 3-30N
6. life test : 5,000 cycles

TERMINAL 1 : PHOSPHOR BRONZE
TERMINAL 2 : PHOSPHOR BRONZE
TERMINAL 3 : PHOSPHOR BRONZE
TERMINAL 4 : PHOSPHOR BRONZE
TERMINAL 10 : BRASS
TERMINAL 11 : BRASS
HOUSING : PAgT

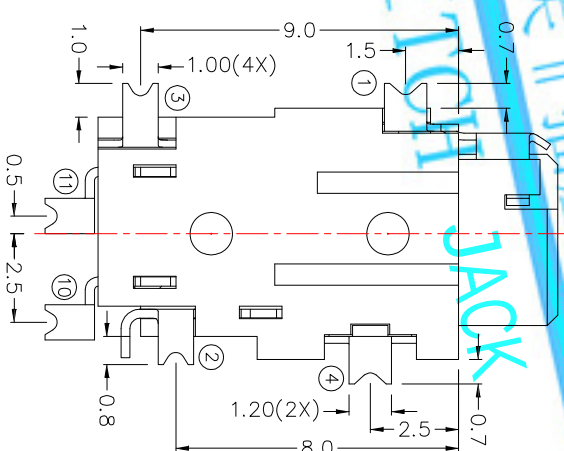

MODEL NO.	PJ-2816D	PJ-2814D
SCHEMATIC		

RECOMMENDED
SOLDER PAD LAYOUT

LONGCHUANG ZHONGYE (HK)CO.,LIMITED

[illegible]