

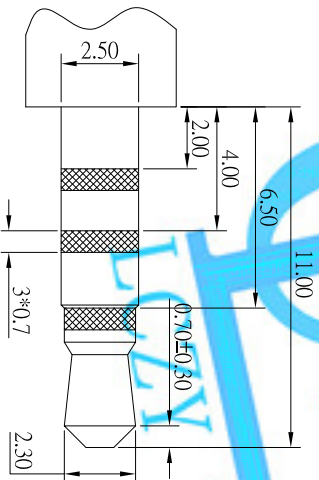
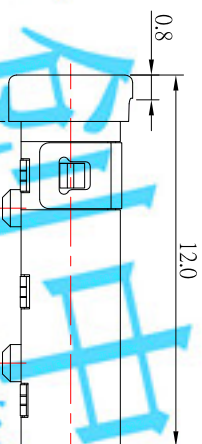

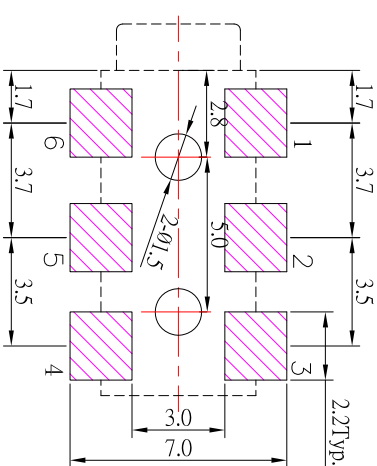
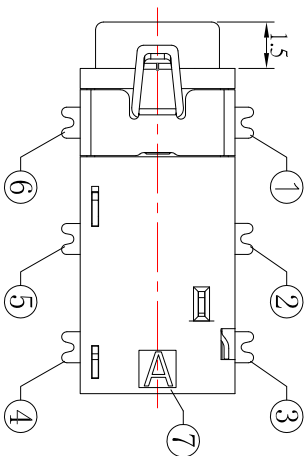




Ø2.50mm 4 POLE PLUG

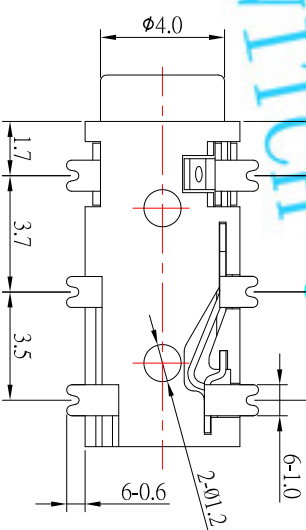

P.C.B LAYOUT MOUNTING PATTERN (TOP VIEW)

MODEL NO.	PI-286GD-H3	PI-286GD-H3
SCHEMATIC		

- SPECIFICATION
- 1.Rating: DC 30V, 1.0A
 - 2.Contact resistance: $\leq 50m\Omega$
 - 3.Insulation resistance: $\geq 100M\Omega$
 - 4.Withstand voltage: 500V AC
 - 5.Insertion and extraction force: 3-20N
 - 6.life test: 5,000 cycles

NO.	DESCRIPTION	QTY	MATERIAL	REMARK
⑦	HOUSING	1	PA9T	
⑥	CONTACT FOOT #6	1	Phosphor Bronze	Au-Plated
⑤	CONTACT FOOT #5	1	Phosphor Bronze	Au-Plated
④	CONTACT FOOT #4	1	Phosphor Bronze	Au-Plated
③	CONTACT FOOT #3	1	Phosphor Bronze	Au-Plated
②	CONTACT FOOT #2	1	Phosphor Bronze	Au-Plated
①	CONTACT FOOT #1	1	Phosphor Bronze	Au-Plated

DATE	MAT'L	TITLE	JACK
------	-------	-------	------

DRAWN BY:	Jack Lu	01/13/17	FINISH	MODLE	PHONE JACK
-----------	---------	----------	--------	-------	------------

CHECKED BY:	Jacky Chen	01/13/17	SCALE	1 : 1	DWG NO.	PI-286GD-H3-S124
-------------	------------	----------	-------	-------	---------	------------------

APPROVED BY:	Tony Kao	01/13/17	SHEET NO.	1 of 1	PART NO.	PI-286GD-H3-S124
--------------	----------	----------	-----------	--------	----------	------------------

LONGCHUANG ZHONGYE (HK)CO.,LIMITED

TOLERANCE UNLESS
OTHERWISE STATED : Above 5 ~ 15 ± 0.3
Above 15 ~ 30 ± 0.4
Above 30 ~ 50 ± 0.5
Angle $\pm 0.3^\circ$

3RD.
ANGEL'S

ITEM NO.	DESCRIPTION	DRAWN	DATE	UNITS	MM
----------	-------------	-------	------	-------	----