
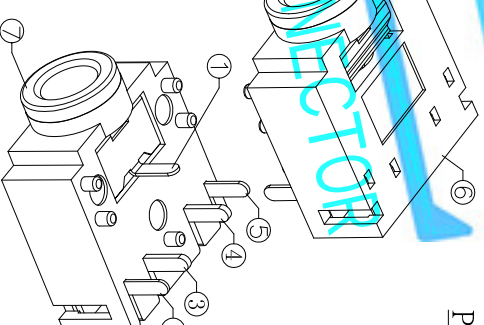
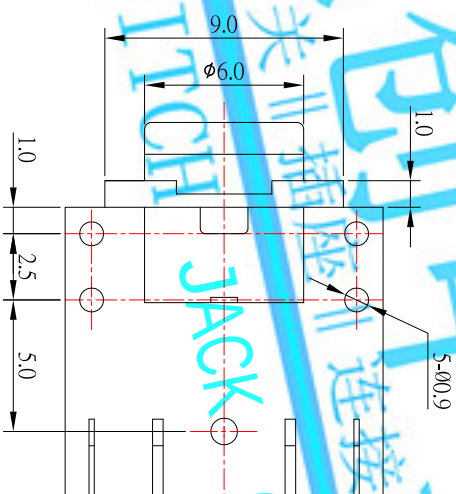
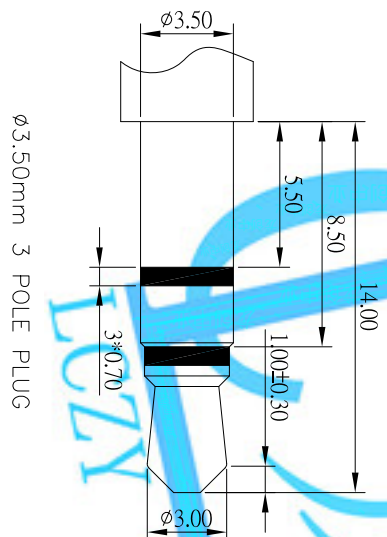
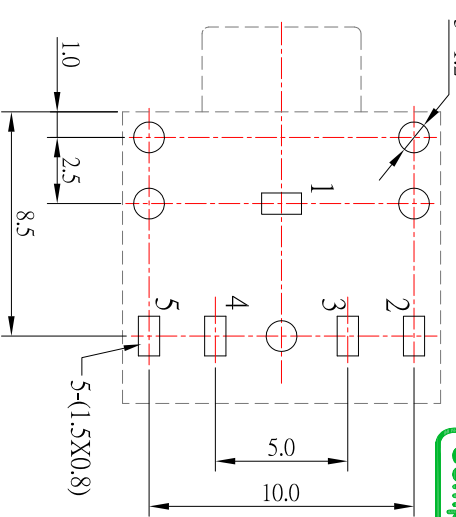
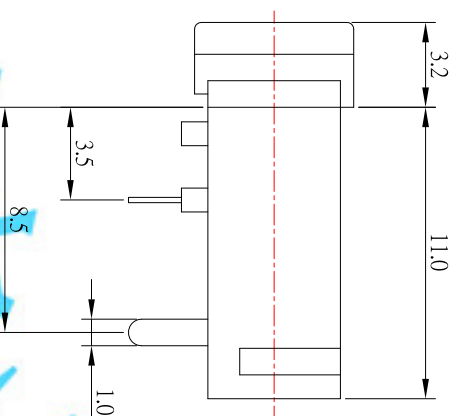


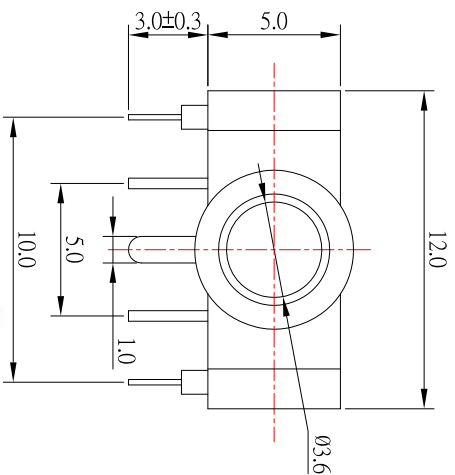

- SPECIFICATION**
1. Rating : DC 30V 0.5A ;
 2. Contact resistance : $\leq 30\text{m}\Omega$;
 3. Insulation resistance : $\geq 100\text{M}\Omega$;
 4. Withstand voltage : 500VAC ;
 5. Insertion and extraction force : 3-20N
 6. life test : 5,000 cycles .

SCHEMATIC

PJ-3515	PJ-3514B	PJ-3514A	PJ-3513

NO.	DESCRIPTION	QTY	MATERIAL
7	AXIS SUPPORT	1	BRASS
6	HOUSING	1	PBT
5	5# CONTACT FOOT	1	PHOSPHOR BRONZE
4	4# CONTACT FOOT	1	BRASS
3	3# CONTACT FOOT	1	BRASS
2	2# CONTACT FOOT	1	SUS
1	1# CONTACT FOOT	1	PHOSPHOR BRONZE

LONGCHUANG ZHONGYE (HK)CO.,LIMITED

TOLERANCE UNLESS
OTHERWISE STATED : Above 5 - 15 ± 0.3
Above 15 - 30 ± 0.4
Above 30 - 50 ± 0.5
Angle $\pm 0.3^\circ$



UNITS

MM

DRAWN BY:	Jack Lu	DATE	04/25/17	MAT'L		TITLE	JACK
CHECKED BY:	Jacky Chen	DATE	04/25/17	FINISH		MODLE	PHONE JACK
APPROVED BY:	Tony Kao	DATE	04/25/17	SCALE	1 : 1	DWG NO.	PF-351x-S124
		SHEET NO.	1 of 1	PART NO.	PF-351x-S124		

