

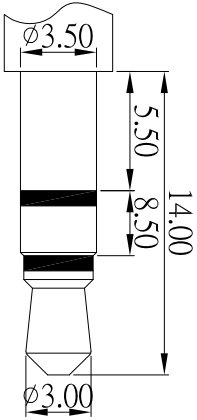
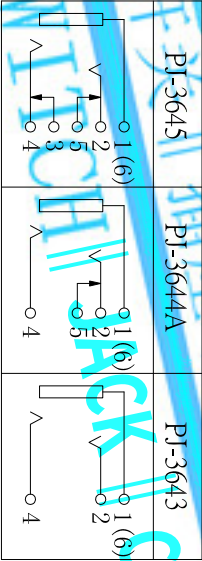
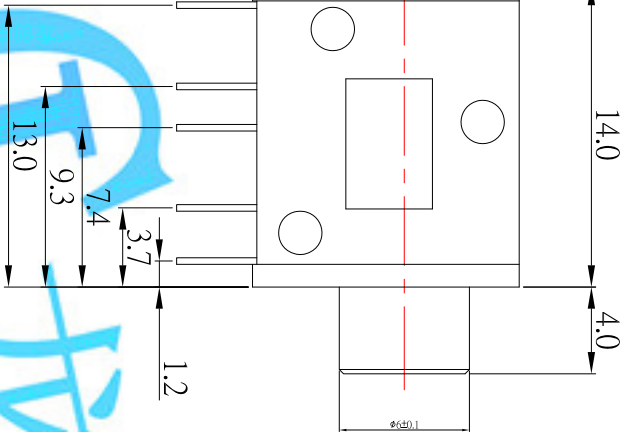


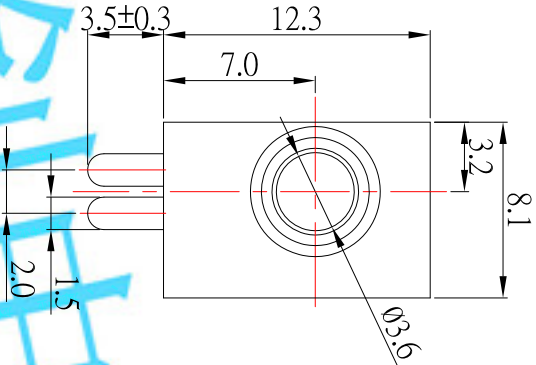


PJ-364X-X-S124

COLOR	
Black:	Blank
PINK:	PI
Green:	GR
Blue:	BL

P.C.B LAYOUT
TOP VIEW

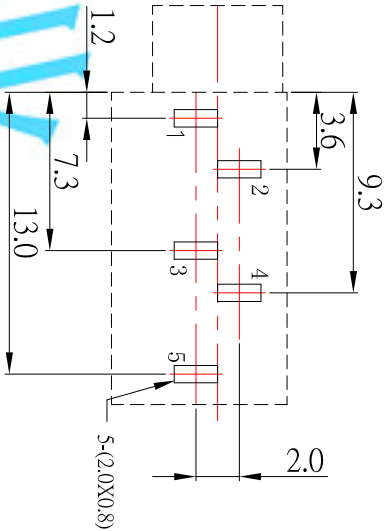

ø3.50mm 3 POLE PLUG

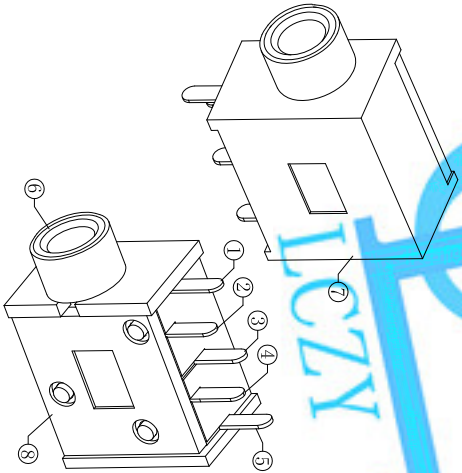

- SPECIFICATION**
- 1.Rating : DC 30V 0.5A ;
 - 2.Contact resistance : ≤0.03 Ω ;
 - 3.Insulation resistance : ≥100MΩ ;
 - 4.Withstand voltage : 500VAC ;
 - 5.Insertion and extraction force : 3-30N;
 - 6.life test : 5,000 cycles °

8	COVER	1	PBT	
7	HOUSING	1	PBT	
6	AXIS SUPPORT	1	BRASS	Ni-Plating
5	CURVE PIECE	1	BRASS	Sn-Plating
4	SPRING PIECE	1	PHOSPHOR BRONZE	Sn-Plating
3	CURVE PIECE	1	BRASS	Sn-Plating
2	SPRING PIECE	1	PHOSPHOR BRONZE	Sn-Plating
1	FLAT PIECE	1	BRASS	Sn-Plating
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

DRAWN BY:	DATE	MATL.	TITLE	JACK
-----------	------	-------	-------	------

Jack Lu	03/03/17			
---------	----------	--	--	--

CHECKED BY:	DATE	FINISH	MODLE	PHONE JACK
-------------	------	--------	-------	------------

Jacky Chen	03/03/17			
------------	----------	--	--	--

APPROVED BY:	DATE	SCALE	DWG NO.	PI-364X-X-S124
--------------	------	-------	---------	----------------

Tony Kao	03/03/17			
----------	----------	--	--	--

		SHEET NO.	1 of 1	PART NO.	PI-364X-X-S124	SIZE	A4
						VIER	R

LONGCHUANG ZHONGYE (HK)CO.,LIMITED

TOLERANCE UNLESS
OTHERWISE STATED :
Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGELS
UNITS
MM

ITEM NO.	DESCRIPTION	DRAWN	DATE
A			
B			
C			
D			
E			
F			
G			
H			
I			
J			