


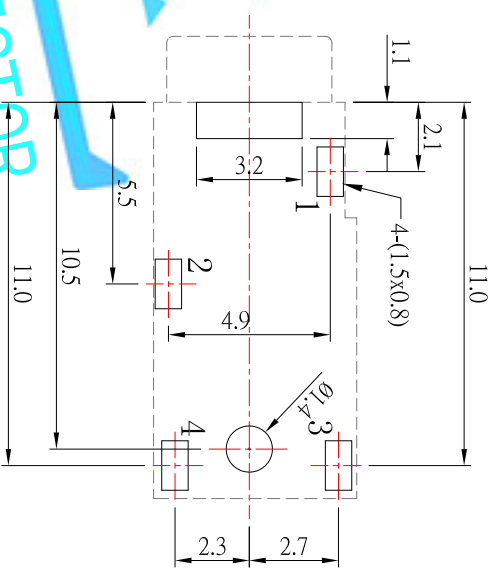
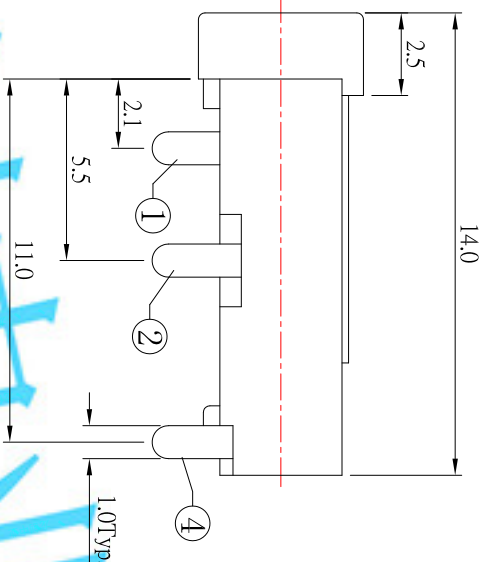


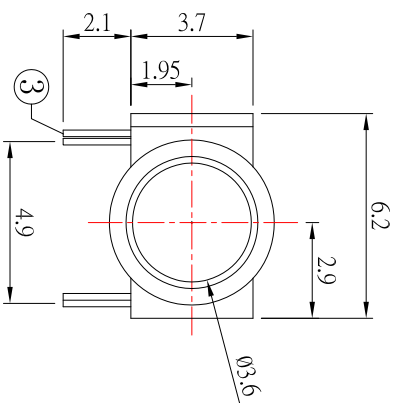

P.C.B LAYOUT
TOP VIEW

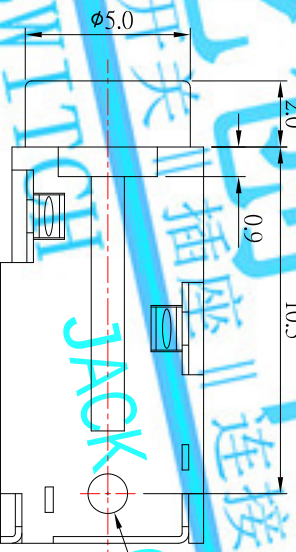


SCHEMATIC

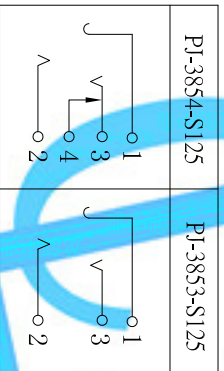

SPECIFICATION

1. Rating : DC 30V 0.5A ;
2. Contact resistance : $\leq 30\text{m}\Omega$;
3. Insulation resistance : $\geq 100\text{M}\Omega$ (DC250V) ;
4. Withstand voltage : 500VAC ;
5. Insertion and extraction force : 3-20N
6. life test : 5,000 cycles °

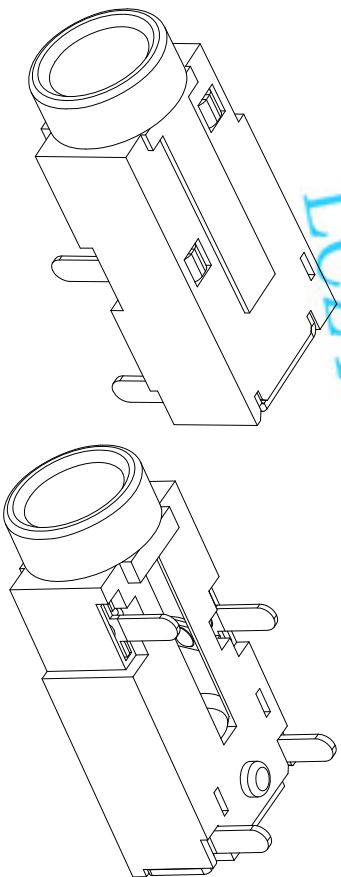

LONGCHUANG ZHONGYE (HK) CO., LIMITED

[illegible]