
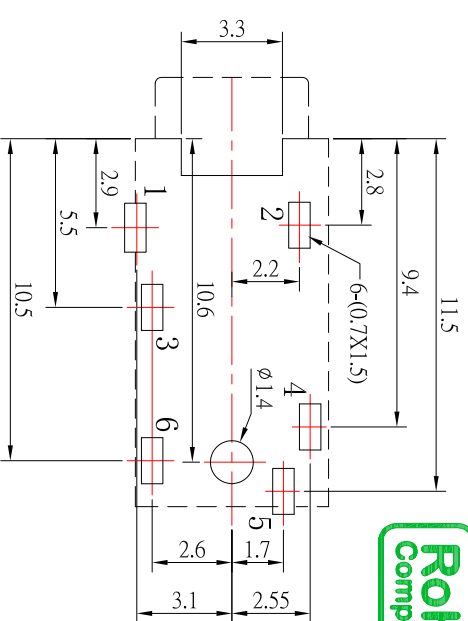
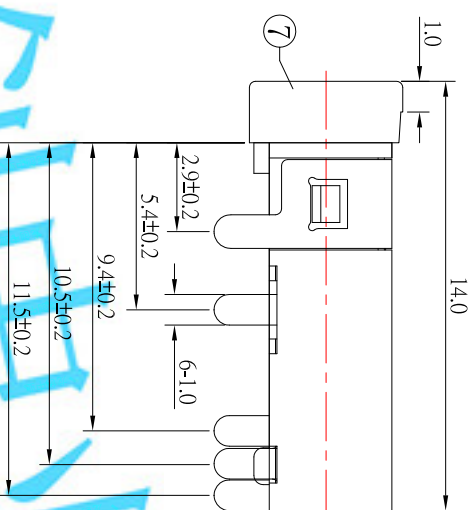


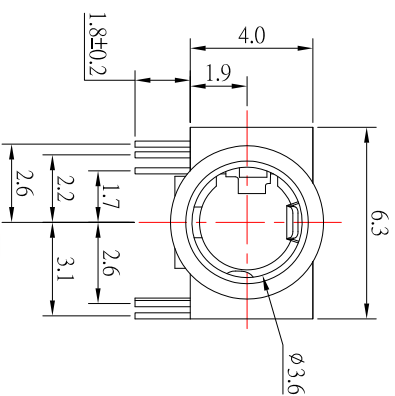


P.C.B LAYOUT
TOP VIEW

SCHEMATIC

PJ-3956	PJ-3954

SPECIFICATION

1. Rating : DC 30V, 1.0A ;
2. Contact resistance : $\leq 30\text{m}\Omega$;
3. Insulation resistance : $\geq 100\text{M}\Omega$;
4. Withstand voltage : 500VAC ;
5. Insertion and extraction force : 3-20N;
6. life test : 5,000 cycles °

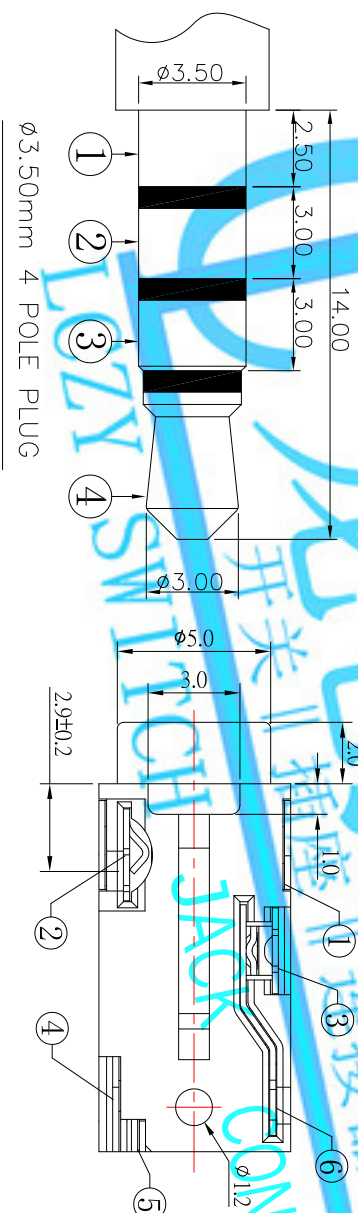

7	HOUSING	1	PPA	
6	6# CONTACT FOOT	1	PHOSPHOR BRONZE	Au-Plating
5	5# CONTACT FOOT	1	PHOSPHOR BRONZE	Au-Plating
4	4# CONTACT FOOT	1	PHOSPHOR BRONZE	Au-Plating
3	3# CONTACT FOOT	1	PHOSPHOR BRONZE	Au-Plating
2	2# CONTACT FOOT	1	PHOSPHOR BRONZE	Au-Plating
1	1# CONTACT FOOT	1	PHOSPHOR BRONZE	Au-Plating
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

			JACK	065219
7	更新尺寸及材質	更新CHEMATIC邊頭	JACK	041819
6	更新CHEMATIC連頭	更新外型樣式	JACK	102517
5	更新外型樣式	更新高0版	JACK	083017
4	更新高0版	更新CHEMATIC	JACK	051717
3	更新CHEMATIC	更新尺寸	JACK	051117
2	更新尺寸		JACK	090816
1			JACK	
ITEM NO.	DESCRIPTION	DRAWN	DATE	

LONGCHUANG ZHONGYE (HK) CO., LIMITED

TOLERANCE UNLESS OTHERWISE STATED : Above 5 ~ 15 Above 15 ~ 30 Above 30 ~ 50 Angle ± 0.2 ± 0.3 ± 0.4 ± 0.5 ± 0.3	3RD ANGEL'S		UNITS	MM						
					JACKY CHEN					
					DATE					
					SCALE					
APPROVED BY:					06/12/19	1 : 1	DWG NO.	PI-395x-S124		
Tony Kao					06/12/19	1 of 1	PART NO.	PI-395x-S124	SHEET NO.	A4
										VIR
										R7