

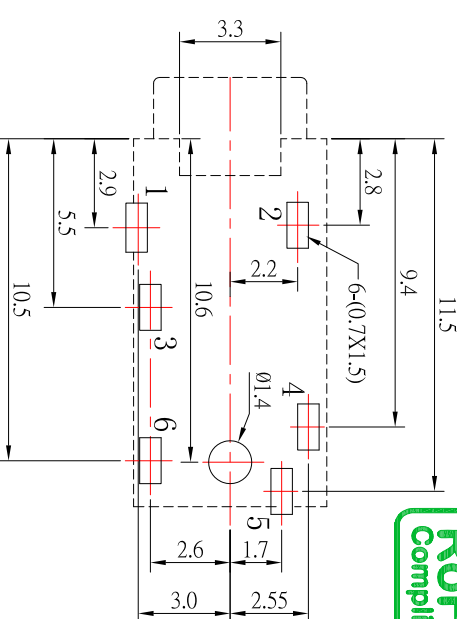
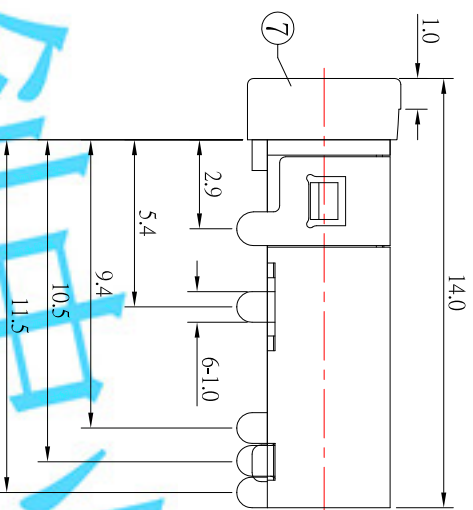


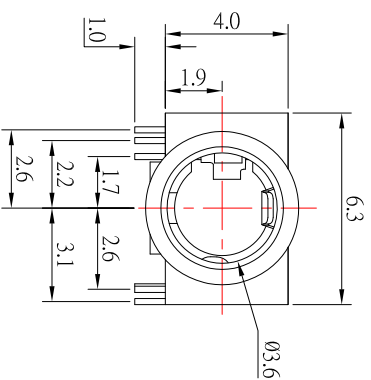

P.C.B LAYOUT
TOP VIEW

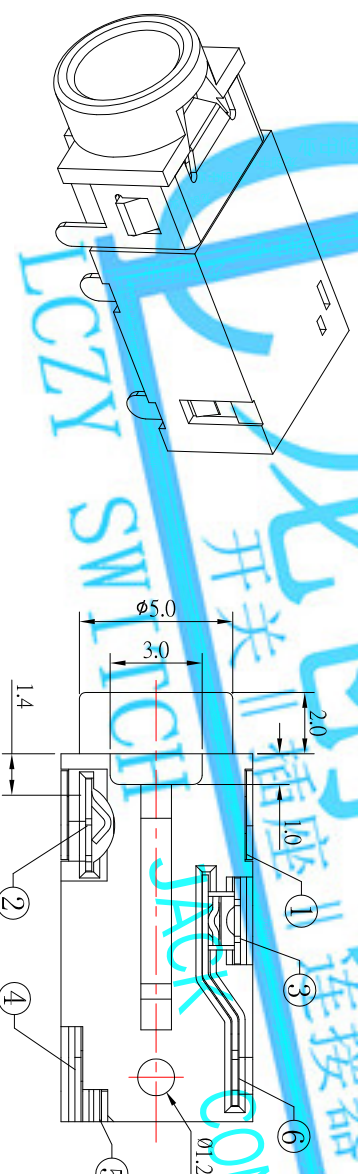

SPECIFICATION

1. Rating : DC 30V 0.5A ;
2. Contact resistance : $\leq 30m\Omega$;
3. Insulation resistance : $\geq 100M\Omega$;
4. Withstand voltage : 500VAC ;
5. Insertion and extraction force : 3-20N ;
6. life test : 5,000 cycles .

SCHEMATIC

PJ-3956-2	PJ-3953A-2	PJ-3953-2	PJ-3954-2	PJ-D3955A-2

NO.	DESCRIPTION	QTY	MATERIAL	PLATING
7	HOUSING	1	PA9T	
6	6# CONTACT FOOT	1	PHOSPHOR BRONZE	Au-Plating
5	5# CONTACT FOOT	1	PHOSPHOR BRONZE	Au-Plating
4	4# CONTACT FOOT	1	PHOSPHOR BRONZE	Au-Plating
3	3# CONTACT FOOT	1	PHOSPHOR BRONZE	Au-Plating
2	2# CONTACT FOOT	1	PHOSPHOR BRONZE	Au-Plating
1	1# CONTACT FOOT	1	PHOSPHOR BRONZE	Au-Plating

LONGCHUANG ZHONGYE (HK)CO.,LIMITED

DRAWN BY: Jack Lu

CHECKED BY: Jacky Chen

APPROVED BY: Tony Kao

DATE: 11/09/16

DATE: 11/09/16

DATE: 11/09/16

MATL: FINISH

SCALE: 1 : 1

SHEET NO. 1 of 1

TITLE: JACK

MODLE: PHONE JACK

DWG NO. PJ-395x-2-S124

PART NO. PJ-395x-2-S124

SIZE: A4

VER: R