

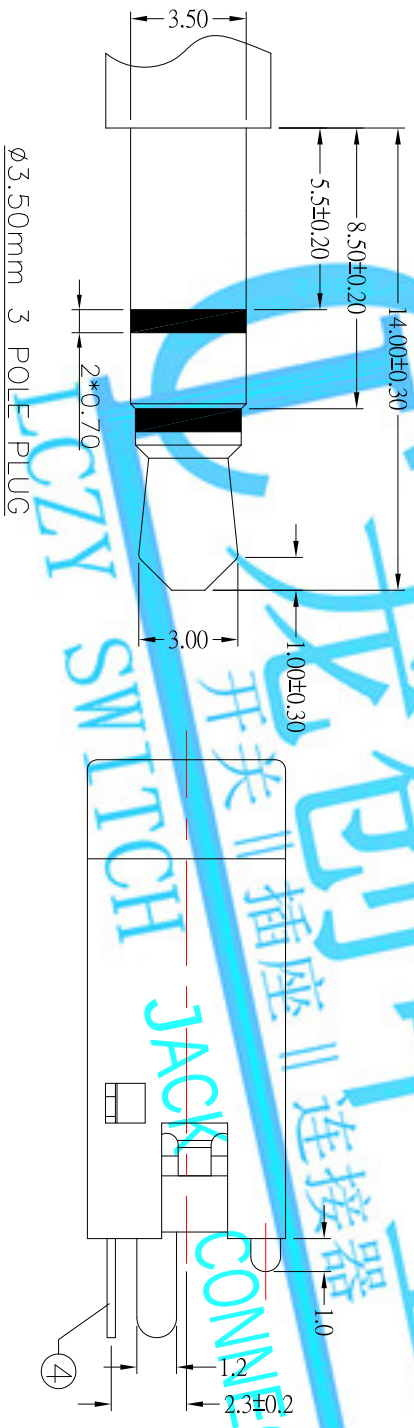
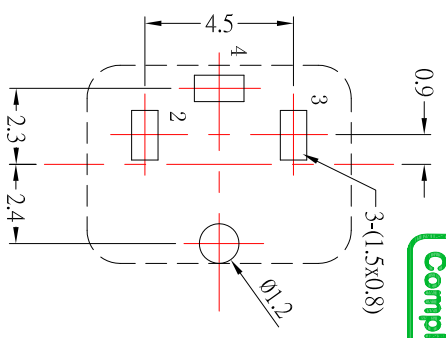
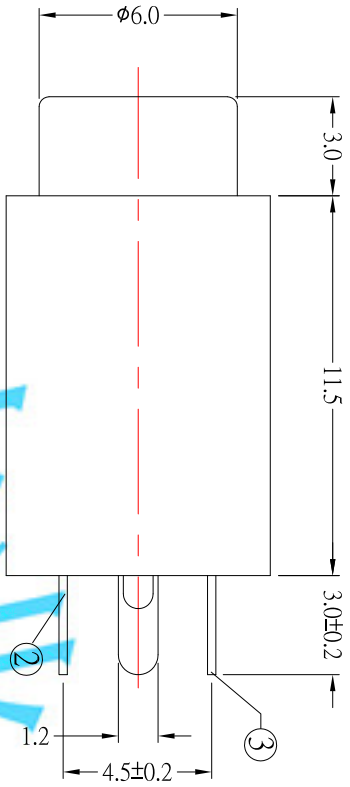
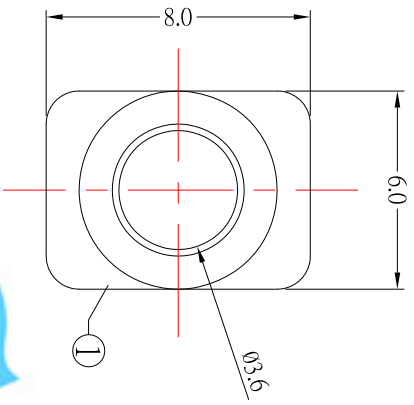


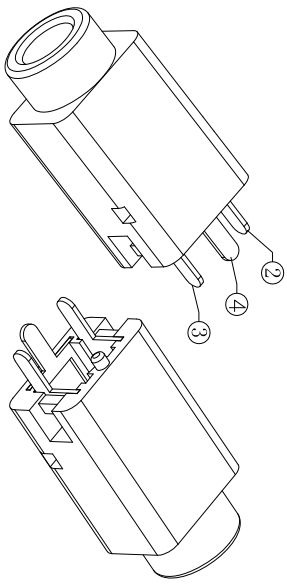

ø3.50mm 3 POLE PLUG

SCHEMATIC



P.C.B LAYOUT MOUNTING PATTERN (TOP VIEW)

SPECIFICATION

1. Rating : DC 30V 0.5A ;
2. Contact resistance : ≤30mΩ ;
3. Insulation resistance : ≥100MΩ ;
4. Withstand voltage : 500VAC ;
5. Insertion and extraction force : 3-20N
6. Life test : 5,000 cycles .

NO.	DESCRIPTION	QTY	MATERIAL	REMARK
4	CONTACT FOOT	1	Phosphor Bronze	Ag-Plated
3	CONTACT FOOT	1	Phosphor Bronze	Ag-Plated
2	CONTACT FOOT	1	Phosphor Bronze	Ag-Plated
1	HOUSING	1	PBT	

DRAWN BY:		DATE:	MAT'L:	TITLE:	JACK
Jack Lu		06/19/17		MODLE:	PHONE JACK
CHECKED BY:		DATE:	FINISH:	DWG NO.:	PP-D3059-S124
Jacky Chen		06/19/17		SCALE:	1 : 1
APPROVED BY:		DATE:	SHEET NO.:	PART NO.:	PP-D3059-S124
Tony Kao		06/19/17	1 of 1		

ITEM NO.	A	B	C	D	E	F	G	H	I	J
DESCRIPTION										
DRAWN										
DATE										

LONGCHUANG ZHONGYE (HK)CO.,LIMITED

TOLERANCE UNLESS OTHERWISE STATED :
Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD. ANGELS

UNITS

MM