

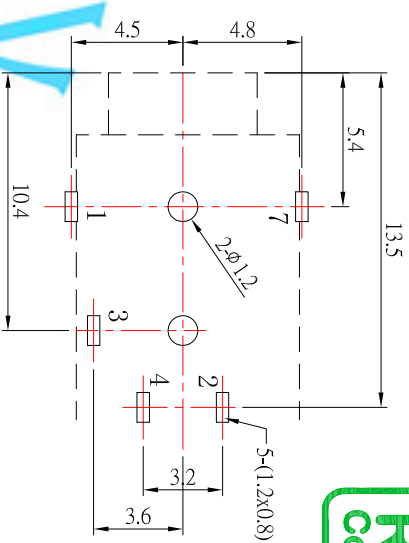
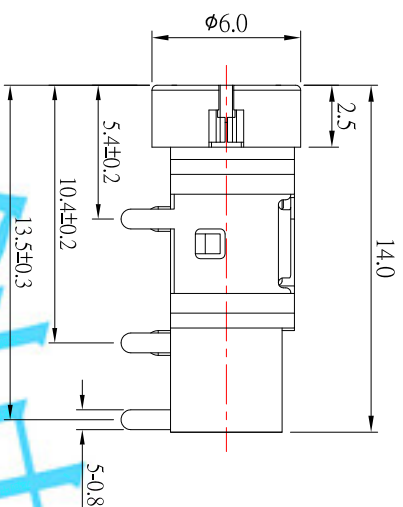
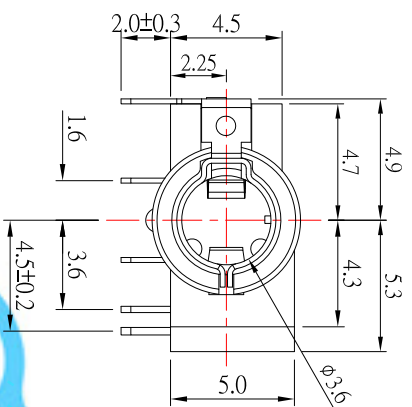
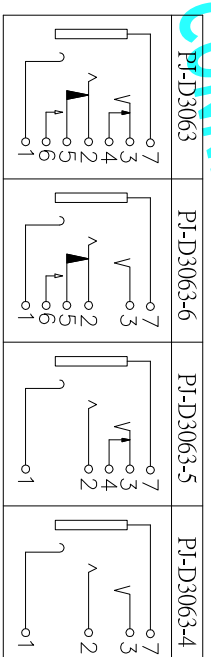


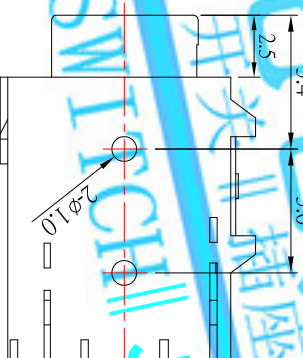



P.C.B LAYOUT MOUNTING PATTERN

(TOP VIEW)

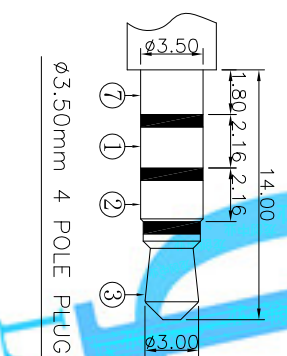

SPECIFICATION

1. Rating : DC 30V 0.5A ;
2. Contact resistance : $\leq 30\text{m}\Omega$;
3. Insulation resistance : $\geq 100\text{M}\Omega$;
4. Withstand voltage : 500VAC ;
5. Insertion and extraction force : 3-20N ;
6. Life test : 5,000 cycles °



LONGCHUANG ZHONGYE (HK) CO., LIMITED

			LONGCHUANG ZHONGYE (HK)CO.,LIMITED				DRAWN BY: DATE		TITLE		JACK	
							Jack Lu 03/21/19		MAT'L			
							CHECKED BY: DATE		FINISH		MODLE PHONE JACK 常開型 翻長2.0mm	
7							Jacky Chen 03/21/19		SCALE		DWG NO. P1-D3063-x-S124	
			TOLERANCE UNLESS OTHERWISE STATED : $\begin{matrix} \text{Up to } 5 & \pm 0.2 \\ \text{Above } 5 \sim 15 & \pm 0.5 \\ \text{Above } 15 \sim 30 & \pm 0.4 \\ \text{Above } 30 \sim 50 & \pm 0.5 \\ \text{Angle} & \pm 0.3 \end{matrix}$				3RD. 		UNITS		MM	
2		JACK	03/21/19				APPROVED BY: DATE		SHEET NO.		1 of 1	
1		更新圖面 更新plug指示	120718				Tony Kao 03/21/19		PART NO.		P1-D3063-x-S124	
ITEM NO.		DESCRIPTION	DRAWN DATE						SIZE		A4 VBR R2	