

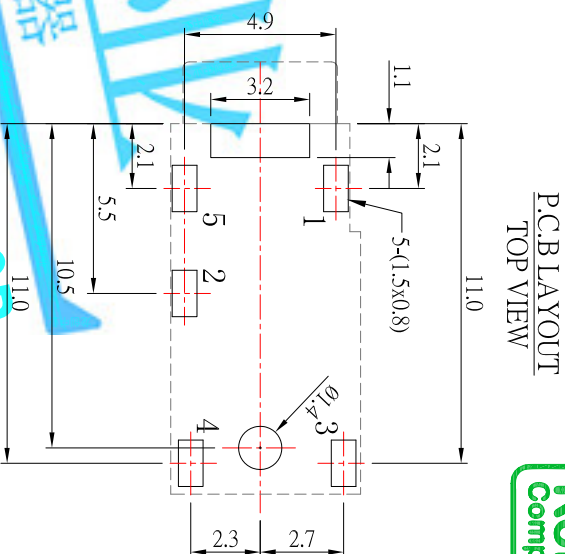
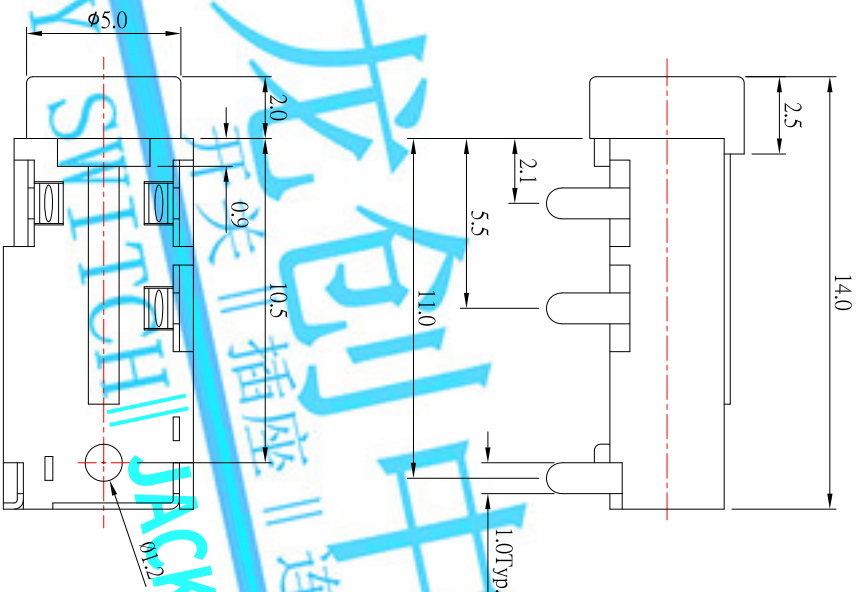



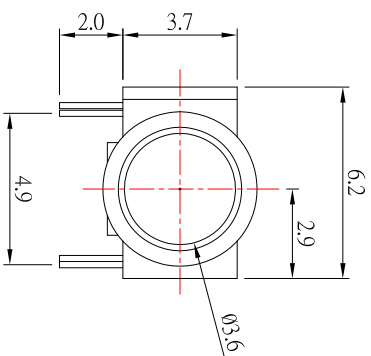

SPECIFICATION

1. Rating : DC 30V 1.0A ;
2. Contact resistance : $\leq 50m\Omega$;
3. Insulation resistance : $\geq 100M\Omega$ (DC250V) ;
4. Withstand voltage : 250VAC ;
5. Insertion and extraction force : 3-20N;
6. life test : 5,000 cycles °

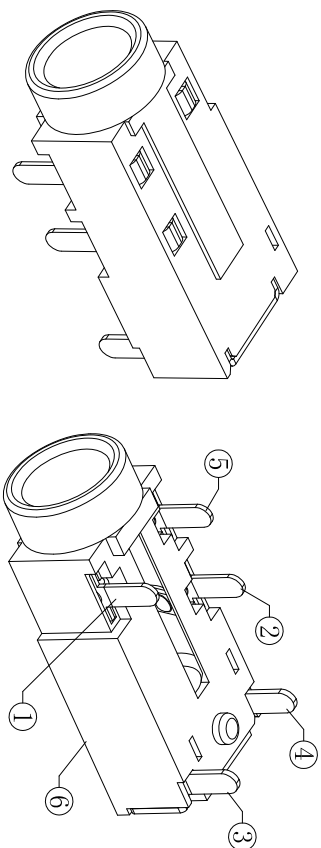

NO.	DESCRIPTION	QTY	MATERIAL
6	HOUSING	1	PBT
5	5# CONTACT FOOT	1	PHOSPHOR BRONZE
4	4# CONTACT FOOT	1	BRASS
3	3# CONTACT FOOT	1	SUS301
2	2# CONTACT FOOT	1	PHOSPHOR BRONZE
1	1# CONTACT FOOT	1	PHOSPHOR BRONZE

DRAWN BY:	DATE	MAT'L	TITLE
Jack Lu	09/16/14		JACK

CHECKED BY:	DATE	FINISH	MODLE
Jacky Chen	09/16/14		PHONE JACK

APPROVED BY:	DATE	SCALE	DWG NO.
Tony Kao	09/16/14	1 : 1	PH-D3081A-S125
		SHEET NO.	PART NO.
		1 of 1	PH-D3081A-S125

LONGCHUANG ZHONGYE (HK)CO.,LIMITED

TOLERANCE UNLESS
OTHERWISE STATED :
Up to 5 ± 0.2
Above 5 ~ 15 ± 0.3
Above 15 ~ 30 ± 0.4
Above 30 ~ 50 ± 0.5
Angle $\pm 0.3^\circ$

3RD. ANGEL'S

UNITS

MM

