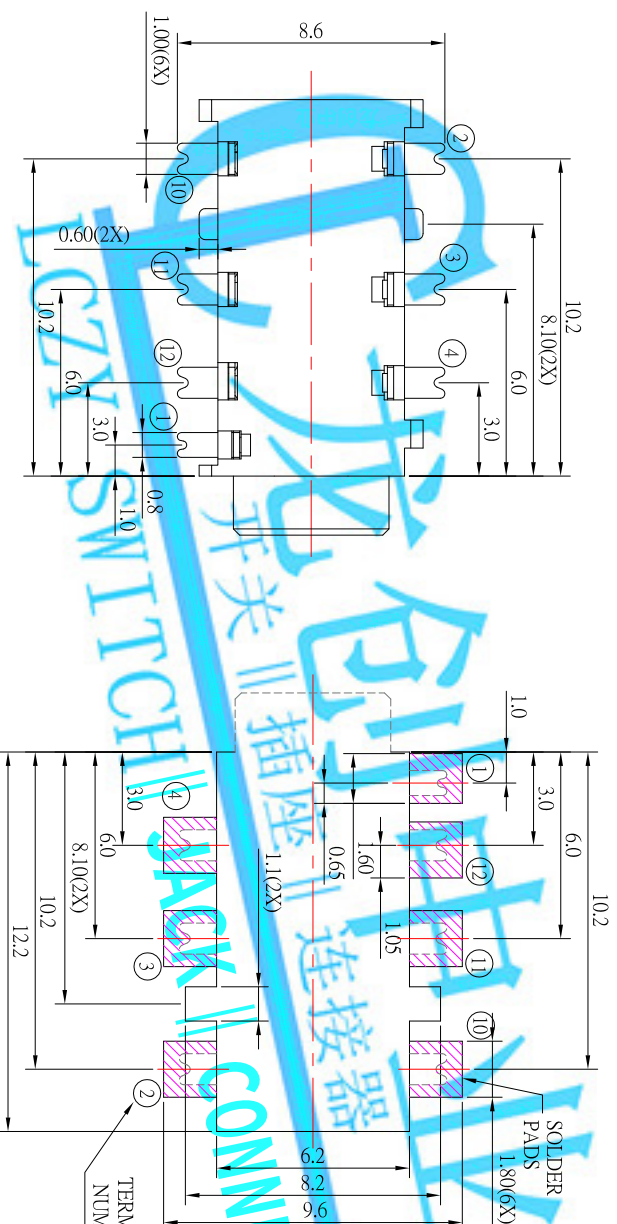
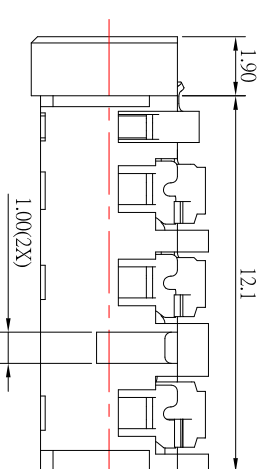
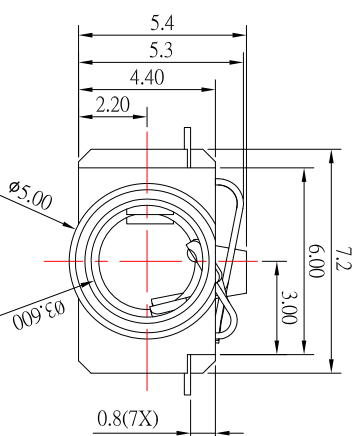
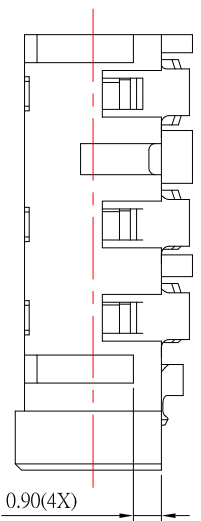


RECOMMENDED SOLDER PAD LAYOUT

MODEL NO.	PI-3927D	PI-3926AD	PI-3925AD	PI-3925BD	PI-3924D
SCHMATIC					

SPECIFICATION

1. Rating : DC 12V 1.0A
2. Contact resistance : $\leq 50\text{m}\Omega$
3. Insulation resistance : $\geq 100\text{M}\Omega$
4. Withstand voltage : 500VAC
5. Insertion and extraction force : 3-30N
6. Life test : 5,000 cycles

*MATERIAL

- TERMINAL 1 :PHOSPHOR BRONZE
TERMINAL 2 :PHOSPHOR BRONZE
TERMINAL 3 :PHOSPHOR BRONZE
TERMINAL 4 :PHOSPHOR BRONZE
TERMINAL 10 :PHOSPHOR BRONZE
TERMINAL 11 :PHOSPHOR BRONZE
TERMINAL 12 :PHOSPHOR BRONZE
HOUSING :PA10T

LONGCHUANG ZHONGYE (HK) CO., LIMITED

[illegible]