

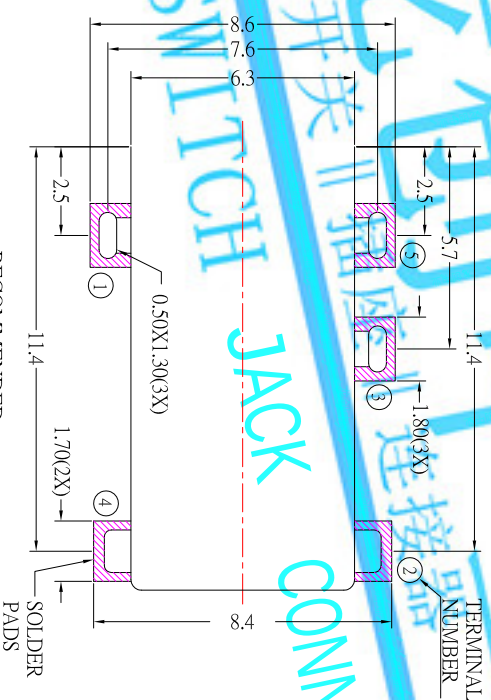
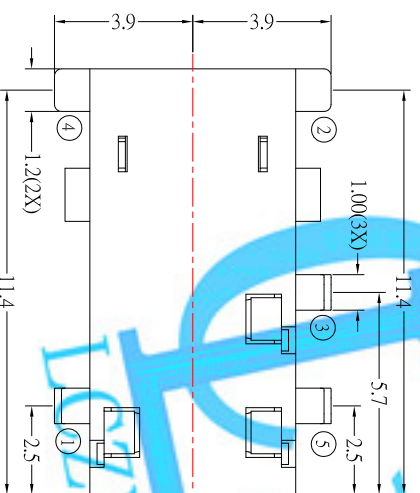
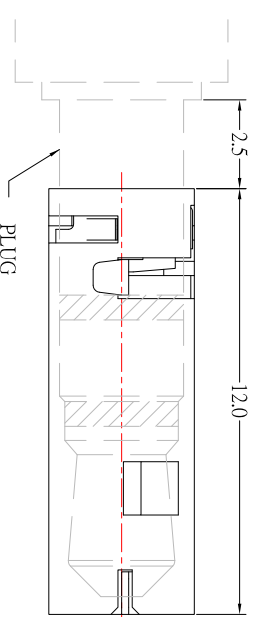
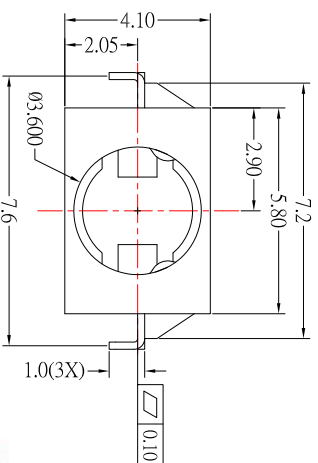


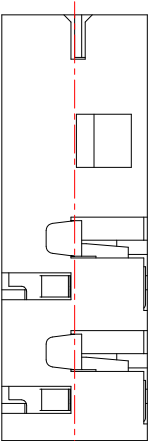

MODEL NO.	PI-5055D-H3
SCHEMATIC	




SPECIFICATION

1. Rating : DC 12V 1.0A
2. Contact resistance : $\leq 50\text{m}\Omega$
3. Insulation resistance : $\geq 100\text{M}\Omega$
4. Withstand voltage : 500VAC
5. Insertion and extraction force : 3-30N
6. Life test : 5,000 cycles

* MATERIAL

- | | |
|------------|--------------------------------------|
| TERMINAL 1 | :PHOSPHOR BRONZE(NMatte Gold Plated) |
| TERMINAL 2 | :PHOSPHOR BRONZE(NMatte Gold Plated) |
| TERMINAL 3 | :PHOSPHOR BRONZE(NMatte Gold Plated) |
| TERMINAL 4 | :PHOSPHOR BRONZE(NMatte Gold Plated) |
| TERMINAL 5 | :PHOSPHOR BRONZE(NMatte Gold Plated) |
| HOUSING | :PA6T |



Ø 3.5 MATE PLUG

LONGCHUANG ZHONGYE (HK) CO., LIMITED

7			
2	新得細子細腹母	Jack	010716
1	新得SPEC	Jack	110315
ITEM NO.	DESCRIPTION	DRAWN	DATE

LONGCHUANG ZHONGYE (HK)CO.,LIMITED	DRAWN BY:		DATE	MAT'L	TITLE	JACK		
	Jack Lu		01/07/16					
	CHECKED BY:		DATE	FINISH	MODLE	3.5mm PHONE JACK 端子翻鍍金		
	Jacky Chen		01/07/16					
	APPROVED BY:		DATE	SCALE	DWG NO.	PI-5055D-H3		
	Tony Kao		01/07/16					
				SHEET NO.	1 of 1	PART NO.	PI-5055D-H3	
							SIZE	
							A4	
							VER	
						A2		
TOLERANCE UNLESS OTHERWISE STATED : Above 5 ~ 15 ±0.2 Above 15 ~ 30 ±0.4 Above 30 ~ 50 ±0.5 Angle ±0.5°								
3RD. ANGEL'S			UNITS	MM				