
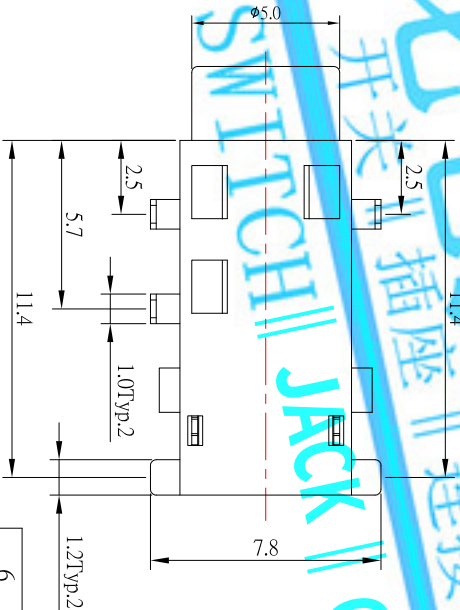
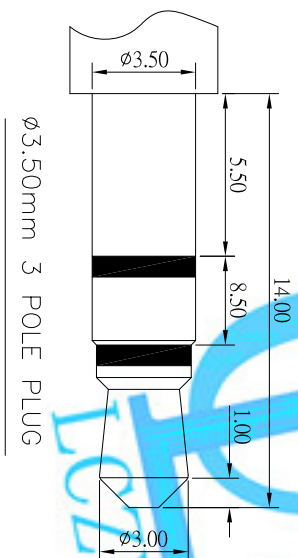
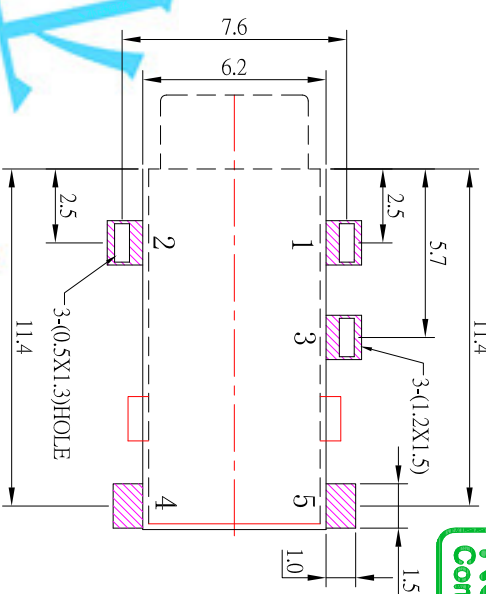
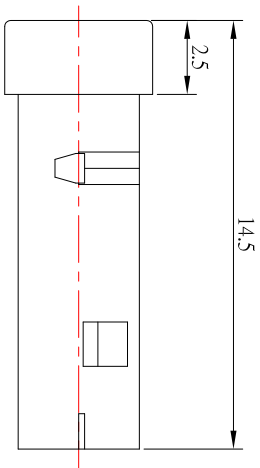


P.C.B LAYOUT
TOP VIEW

SPECIFICATION

1. Rating: DC 30V 0.5A ;
2. Contact resistance: $\leq 30\text{m}\Omega$;
3. Insulation resistance: $\geq 100\text{M}\Omega$;
4. Withstand voltage: 500VAC ;
5. Insertion and extraction force: 3-20N;
6. life test: 5,000 cycles °

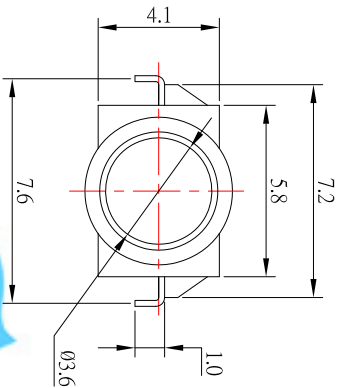

LONGCHUANG ZHONGYE (HK)CO.,LIMITED

TOLERANCE UNLESS	Up to 5	± 0.2
OTHERWISE STATED :	Above 5 ~ 15	± 0.3
	Above 15 ~ 30	± 0.4
	Above 30 ~ 50	± 0.5
ANGLE		$\pm 0.3^\circ$
3RD. ANGELS		
UNITS		MM

NO.	DESCRIPTION	QTY	MATERIAL	PLATING
6	HOUSING	1	PA9T	
5	5# CONTACT FOOT	1	PHOSPHOR BRONZE	Au-Plating
4	4# CONTACT FOOT	1	PHOSPHOR BRONZE	Au-Plating
3	3# CONTACT FOOT	1	PHOSPHOR BRONZE	Au-Plating
2	2# CONTACT FOOT	1	PHOSPHOR BRONZE	Au-Plating
1	1# CONTACT FOOT	1	PHOSPHOR BRONZE	Au-Plating

DRAWN BY:	DATE	MAT'L	TITLE	JACK
-----------	------	-------	-------	------

JACK LU	04/12/17			
---------	----------	--	--	--

CHECKED BY:	DATE	FINISH	MODLE	3.5mm PHONE JACK 端子腳鍍金
-------------	------	--------	-------	------------------------

JACKY CHEN	04/12/17			
------------	----------	--	--	--

APPROVED BY:	DATE	SCALE	DWG NO.	PF-5055D-S124
--------------	------	-------	---------	---------------

TONY KAO	04/12/17			
----------	----------	--	--	--

	SHEET NO.	1 of 1	PART NO.	PF-5055D-S124
--	-----------	--------	----------	---------------

ITEM NO.	DESCRIPTION	DRAWN	DATE	SIZE	A4	VER	R1
----------	-------------	-------	------	------	----	-----	----