

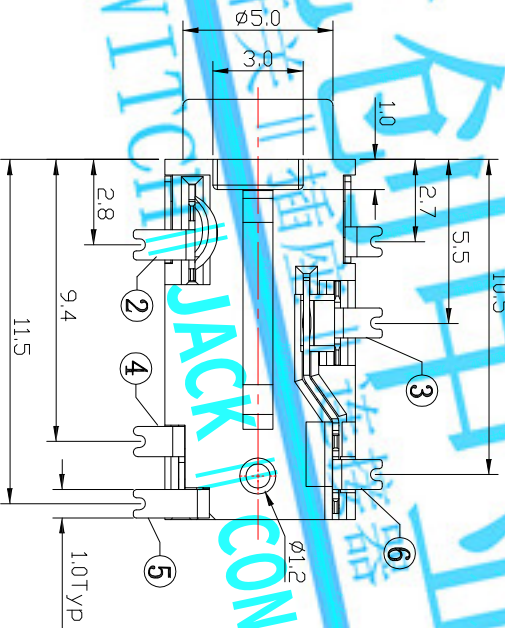
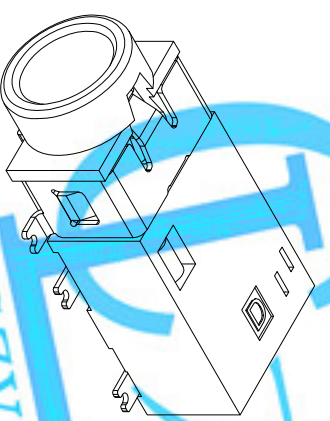
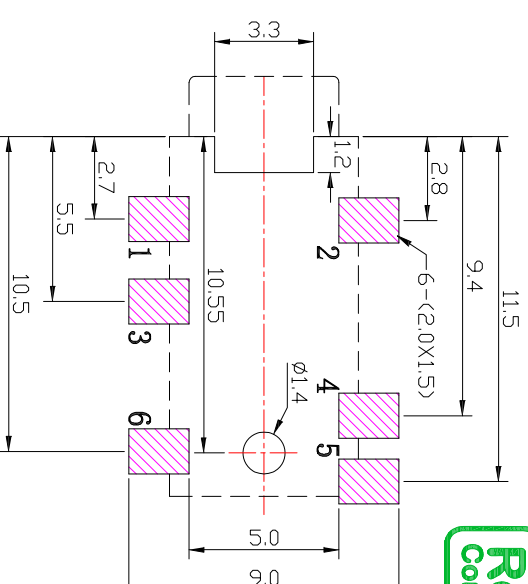
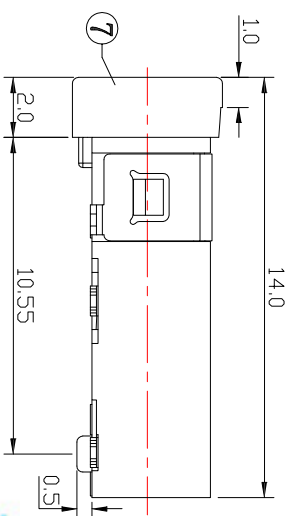


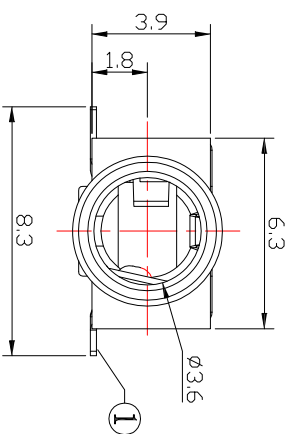

SCHEMATIC

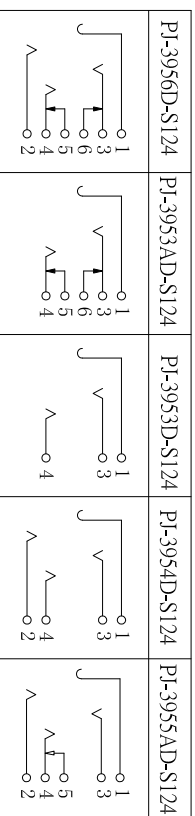

6	HOUSING	1	PA9T	
5	5#CONTACT FOOT	1	PHOSPHOR BRONZE	Au-Plating
4	4#CONTACT FOOT	1	PHOSPHOR BRONZE	Au-Plating
3	3#CONTACT FOOT	1	PHOSPHOR BRONZE	Au-Plating
2	2#CONTACT FOOT	1	PHOSPHOR BRONZE	Au-Plating
1	1#CONTACT FOOT	1	PHOSPHOR BRONZE	Au-Plating
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

LONGCHUANG ZHONGYE (HK)CO.,LIMITED

TOLERANCE UNLESS
OTHERWISE STATED : Above 5 ~ 15 ± 0.2
Above 15 ~ 30 ± 0.4
Above 30 ~ 50 ± 0.5
Angle $\pm 0.3^\circ$

3RD. ANGEL'S
UNITS
MM

DRAWN BY:	DATE	MATL.	TITLE	JACK
Jack Lu	11/29/16			
CHECKED BY:	DATE	FINISH	MODLE	PHONE JACK
Jacky Chen	11/29/16	SCALE	1 : 1	DWG NO. PJ-395XD-S124
APPROVED BY:	DATE	SHEET NO.	PART NO.	PJ-395XD-S124
Tony Kao	11/29/16	1 of 1		

- ### SPECIFICATION
- 1.Rating : DC 30V 0.5A ;
 - 2.Contact resistance : $\leq 30m\Omega$;
 - 3.Insulation resistance : $\geq 100M\Omega$;
 - 4.Withstand voltage : 500VAC ;
 - 5.Insertion and extraction force : 3-20N;
 - 6.life test : 5,000 cycles 。