


SPECIFICATION

1. Rating : DC 12V 1.0A
2. Contact resistance : $\leq 50m\Omega$
3. Insulation resistance : $\geq 100M\Omega$
4. Withstand voltage : 500VAC
5. Insertion and extraction force : 3-30N
6. Life test : 5,000 cycles

* MATERIAL

- TERMINAL 1 : PHOSPHOR BRONZE
TERMINAL 2 : PHOSPHOR BRONZE
TERMINAL 3 : PHOSPHOR BRONZE
TERMINAL 4 : PHOSPHOR BRONZE
TERMINAL 10 : PHOSPHOR BRONZE
TERMINAL 11 : PHOSPHOR BRONZE
TERMINAL 12 : PHOSPHOR BRONZE
TERMINAL 13 : PHOSPHOR BRONZE
SHIELD : STAINLESS STEEL
HOUSING : PA10T

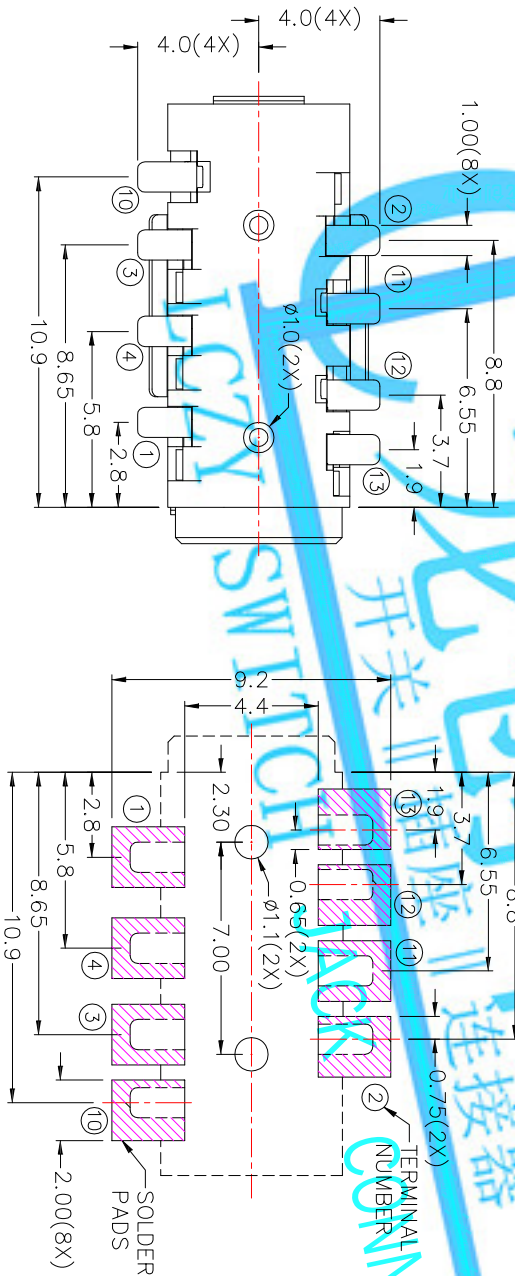

RECOMMENDED
SOLDER PAD LAYOUT
(TOP VIEW)

LONGCHUANG ZHONGYE (HK)CO.,LIMITED

DRAWN BY: Jack Lu		DATE: 08/13/19		MATERIAL: JACK	
CHECKED BY: Jacky Chen		DATE: 08/13/19		TITLE: PHONE JACK	
APPROVED BY: Tony Kao		DATE: 08/13/19		FINISH: SCALE 1:1	
SHEET NO. 1 of 1		PART NO. PU-5108DS1		DWG NO. PU-5108DS1	
ITEM NO. 1		DESCRIPTION: 新增SPEC		DRAWN DATE: 06/29/16	
ITEM NO. 2		DESCRIPTION: 更新材料		DRAWN DATE: 08/13/19	
ITEM NO. 7		DESCRIPTION: 新增SPEC		DRAWN DATE: 06/29/16	
ITEM NO. A		DESCRIPTION: 新增SPEC		DRAWN DATE: 06/29/16	