




MODEL NO.	PJ-5114D
SCHEMATIC	

SPECIFICATION

1. Rating : DC 12V 1.0A
2. Contact resistance : $\leq 50m\Omega$
3. Insulation resistance : $\geq 100M\Omega$
4. Withstand voltage : 500VAC
5. Insertion and extraction force : 3-30N
6. Life test : 5,000 cycles

*MATERIAL

TERMINAL 1 : PHOSPHOR BRONZE
TERMINAL 2 : PHOSPHOR BRONZE
TERMINAL 3 : PHOSPHOR BRONZE
TERMINAL 4 : PHOSPHOR BRONZE
HOUSING : PA6T

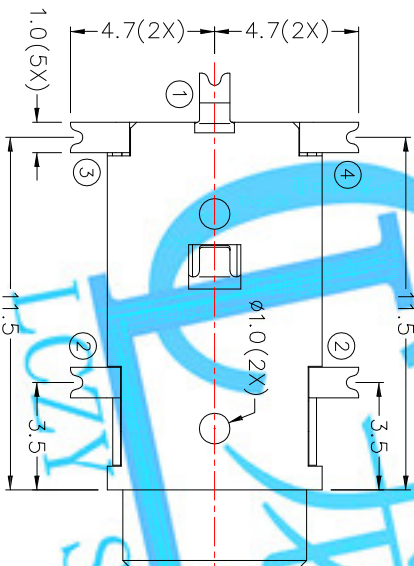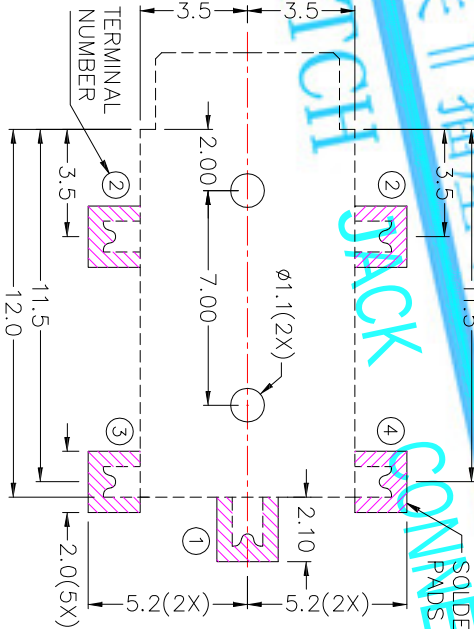

LONGCHUANG ZHONGYE (HK)CO.,LIMITED

DRAWN BY: Jack Lu		DATE: 06/29/16		MATERIAL: JACK	
CHECKED BY: Jacky Chen		DATE: 06/29/16		TITLE: PHONE JACK	
APPROVED BY: Tony Kao		DATE: 06/29/16		DWG NO. PJ-5114D	
SHEET NO. 1 of 1		PART NO. PJ-5114D		SIZE: A4	
TOLERANCE UNLESS OTHERWISE STATED : Up to 5 ± 0.2 Angle Above 5 ~ 15 ± 0.3 Above 15 ~ 30 ± 0.4 Above 30 ~ 50 ± 0.5 $\pm 0.3^\circ$		3RD. ANGLES		UNITS: MM	
DESCRIPTION: #规格: Jack		DRAWN DATE: 06/29/16		ITEM NO. A	