
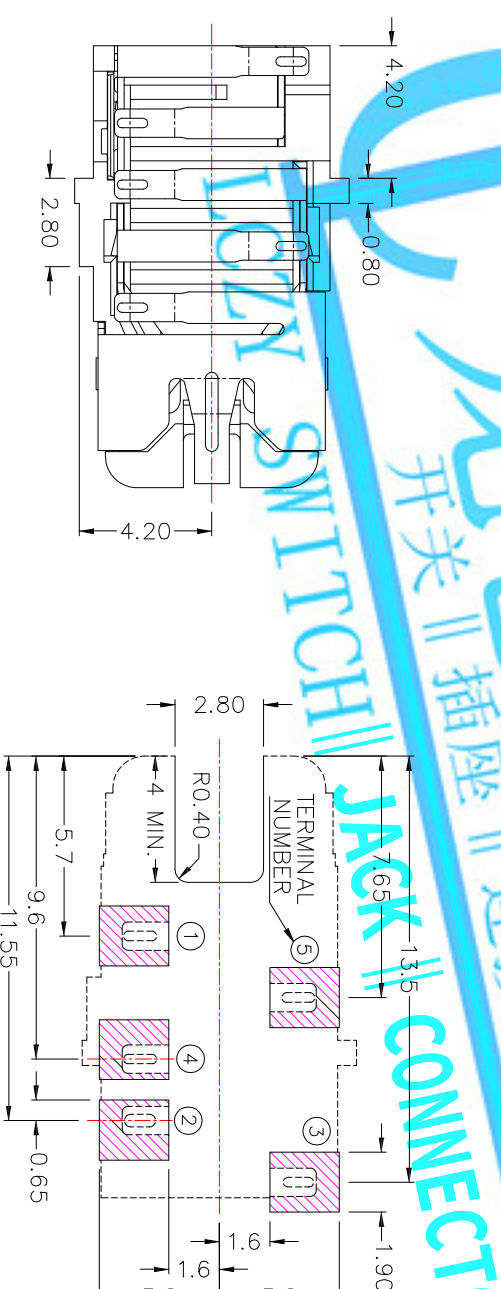
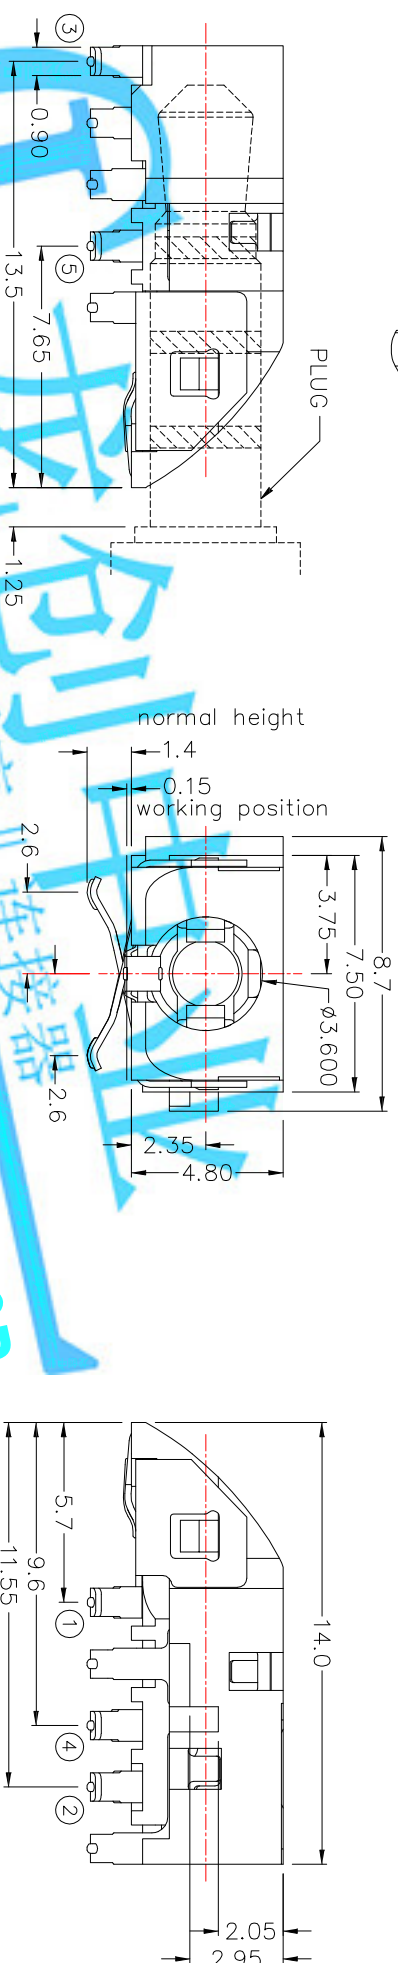
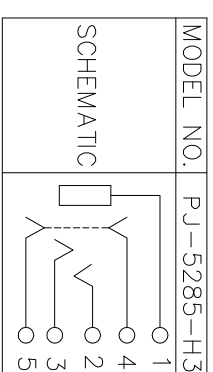



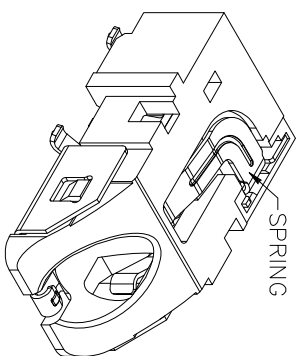

SPECIFICATION

- 1.Rating : DC 12V 1.0A
- 2.Contact resistance : $\leq 50m\Omega$
- 3.Insulation resistance : $\geq 100M\Omega$
- 4.Withstand voltage : 500VAC
- 5.Insertion and extraction force : 3-30N
- 6.life test : 5,000 cycles

* MATERIAL

TERMINAL 1 : COPPER ALLOY
TERMINAL 2 : COPPER ALLOY
TERMINAL 3 : COPPER ALLOY
TERMINAL 4 : COPPER ALLOY
TERMINAL 5 : COPPER ALLOY
SPRING : COPPER ALLOY
HOUSING : PA6T

PCB LAYOUT
(TOP VIEW)

LONGCHUANG ZHONGYE (HK)CO.,LIMITED

DRAWN BY: Jack Lu		DATE	11/03/15	MATL.	JACK
CHECKED BY: Jacky Chen		DATE	11/03/15	FINISH	MODLE PHONE JACK
APPROVED BY: Tony Kao		DATE	11/03/15	SCALE	1 : 1
SHEET NO.		1 of 1	PART NO.	PJ-5285-H3	SIZE A4
TOLERANCE UNLESS OTHERWISE STATED : Up to 5° ±0.2° Above 5° ~ 15° ±0.3° Above 15° ~ 30° ±0.4° Above 30° ~ 50° ±0.5° Angle ±0.3°		3RD. ANGLES	UNITS	MM	VER R1
ITEM NO.	DESCRIPTION	DRAWN	DATE		