



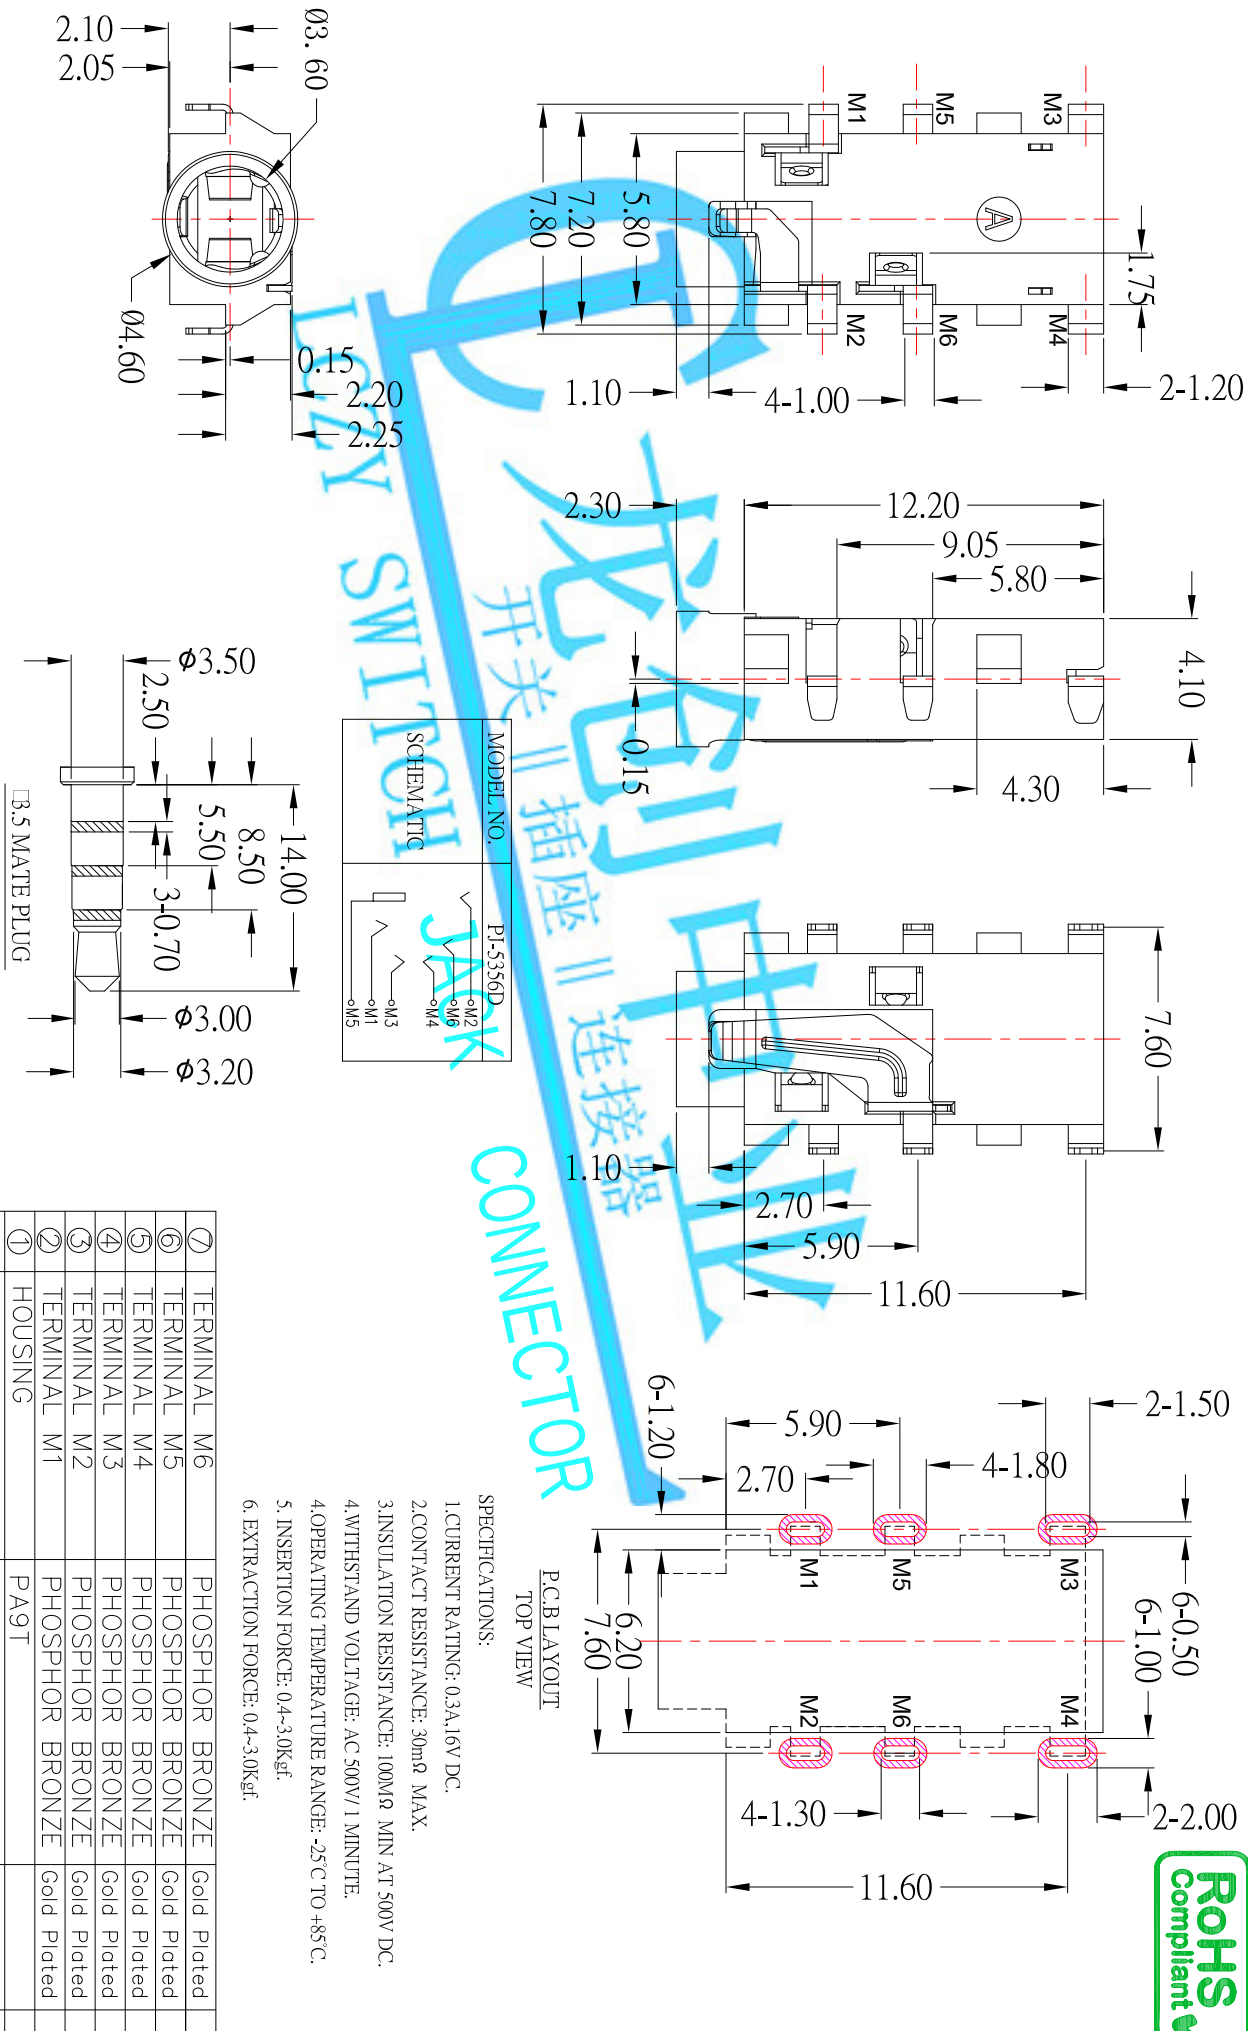

P.C.B LAYOUT
TOP VIEW

SPECIFICATIONS:

- 1.CURRENT RATING: 0.3A,16V DC.
- 2.CONTACT RESISTANCE: 30m Ω MAX.
- 3.INSULATION RESISTANCE: 100M Ω MIN AT 500V DC.
- 4.WITHSTAND VOLTAGE: AC 500V / 1 MINUTE.
- 4.OPERATING TEMPERATURE RANGE: -25 $^{\circ}$ C TO +85 $^{\circ}$ C.
5. INSERTION FORCE: 0.4-3.0Kg $\cdot$ gf.
6. EXTRACTION FORCE: 0.4-3.0Kg $\cdot$ gf.



ITEM	DESCRIPTIONS	MATERIAL	FINISH	Q'ty
①	HOUSING	PA9T		1
②	TERMINAL M1	PHOSPHOR BRONZE	Gold Plated	1
③	TERMINAL M2	PHOSPHOR BRONZE	Gold Plated	1
④	TERMINAL M3	PHOSPHOR BRONZE	Gold Plated	1
⑤	TERMINAL M4	PHOSPHOR BRONZE	Gold Plated	1
⑥	TERMINAL M5	PHOSPHOR BRONZE	Gold Plated	1
⑦	TERMINAL M6	PHOSPHOR BRONZE	Gold Plated	1

DRAWN BY: Jack Lu

CHECKED BY: DATE

APPROVED BY: Jacky Chen

DATE: 09/08/16

SCALE: 1 : 1

SHEET NO. 1 of 1

PART NO. P1-5356D-S214

LONGCHUANG ZHONGYE (HK)CO.,LIMITED

TOLERANCE UNLESS
OTHERWISE STATED :
Up to 5 ± 0.2
Above 5 ~ 15 ± 0.3
Above 15 ~ 30 ± 0.4
Above 30 ~ 50 ± 0.5
Angle $\pm 0.3^{\circ}$

3RD.
ANGELS

UNITS
MM

APPROVED BY: Tony Kao

DATE: 09/08/16

SHEET NO. 1 of 1

PART NO. P1-5356D-S214

SIZE
A4
VIER
R