

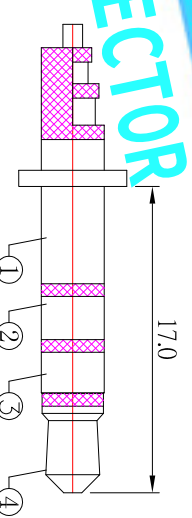
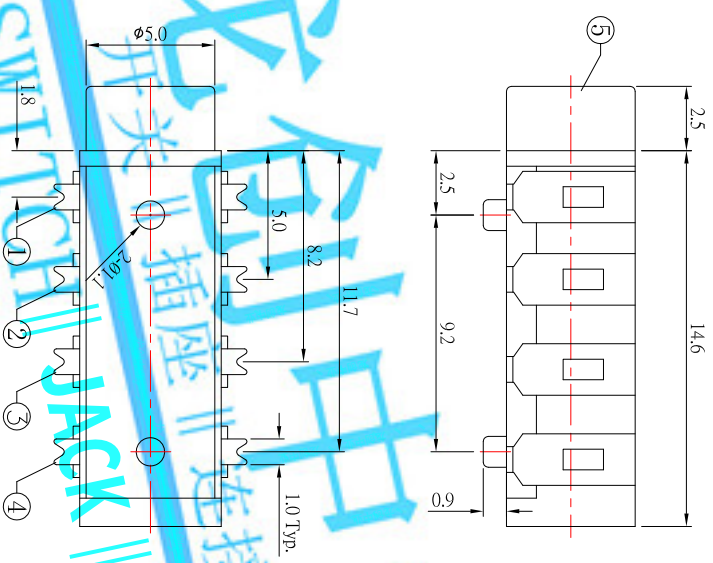



P.C.B LAYOUT
TOP VIEW


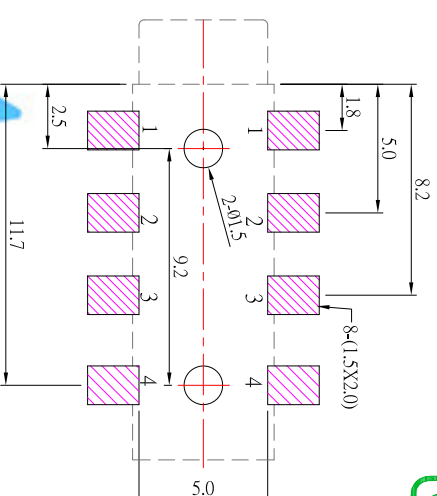


SCHEMATIC



SPECIFICATION

- 1.Rating : DC 30V 0.5A
- 2.Contact resistance : $\leq 50m\Omega$
- 3.Insulation resistance : $\geq 100M\Omega$ (DC250V)
4. Withstand voltage : 500VAC
- 5.Insertion and extraction force : 3-20N
- 6.life test : 5,000 cycles

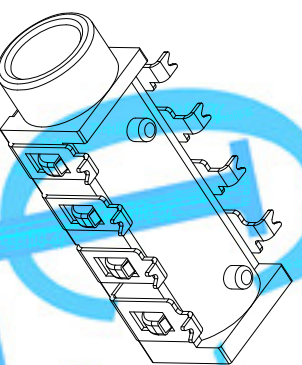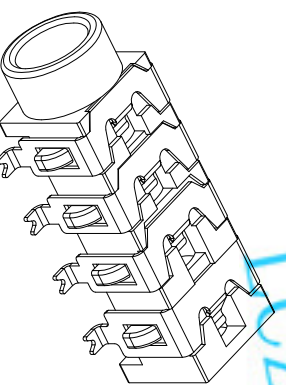

LONGCHUANG ZHONGYE (HK)CO.,LIMITED

TOLERANCE UNLESS
OTHERWISE STATED :
Up to 5 ± 0.2
Above 5 ~ 15 ± 0.3
Above 15 ~ 30 ± 0.4
Above 30 ~ 50 ± 0.5
Angle $\pm 0.3^\circ$

3RD.
ANGELS
UNITS
MM

NO.	DESCRIPTION	QTY	MATERIAL	PLATING
⑤	HOUSING	1	PA9T	
④	CONTACT FOOT #4	1	STAINLESS STEEL	Ag-Plating
③	CONTACT FOOT #3	1	STAINLESS STEEL	Ag-Plating
②	CONTACT FOOT #2	1	STAINLESS STEEL	Ag-Plating
①	CONTACT FOOT #1	1	STAINLESS STEEL	Ag-Plating

DRAWN BY:

Jack Lu

DATE

TITLE

JACK

CHECKED BY:

Jacky Chen

DATE

MODLE

PHONE JACK

APPROVED BY:

Tony Kao

SCALE

DWG NO.

PL-S3013E-S125

PART NO.

PL-S3013E-S125

DESCRIPTION

DRAWN

DATE

DATE

SHEET NO.

1 of 1

PART NO.

PL-S3013E-S125

SIZE

A4

VIER

R2