

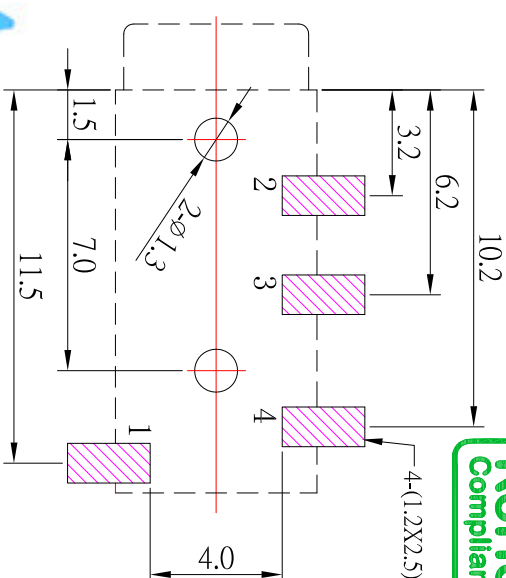
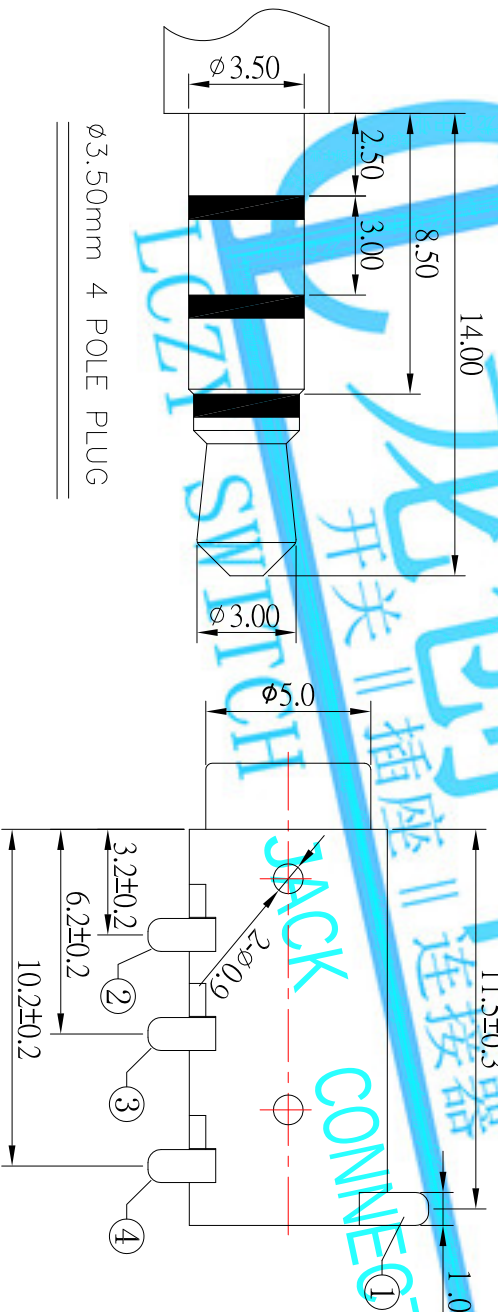


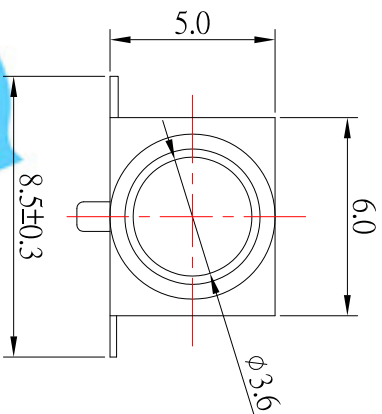

SCHEMATIC



SPECIFICATIONS

- 1.Rating : DC 30V, 1.0A ;
- 2.Contact resistance : $\leq 30\text{m}\Omega$;
- 3.Insulation resistance : $\geq 100\text{M}\Omega$;
- 4.Withstand voltage : 500VAC ;
- 5.Insertion and extraction force : 3-20N;
- 6.life test : 5,000 cycles °

P.C.B LAYOUT
TOP VIEW

LONGCHUANG ZHONGYE (HK)CO.,LIMITED

4	更新樣式及尺寸	Jack	03/28/19
3	更新PLUG尺寸	Jack	05/01/18
2	更新圖面	Jack	08/03/17
1	更新材質	Jack	08/01/17
ITEM NO.	DESCRIPTION	DRAWN	DATE

UP to 5°	±0.2
Above 5 ~ 15°	±0.3
Above 15 ~ 30°	±0.4
Above 30 ~ 50°	±0.5
Angle	±0.3°
3RD. ANGEL'S	
UNITS	MM

NO.	DESCRIPTION	QTY	MATERIAL	DATE	MATL.	TITLE
⑤	HOUSING	1	PA9T	03/28/19		JACK
④	4# CONTACT FOOT	1	PHOSPHOR BRONZE	03/28/19	FINISH	PHONE JACK
③	3#CONTACT FOOT	1	PHOSPHOR BRONZE	03/28/19	SCALE	
②	2# CONTACT FOOT	1	PHOSPHOR BRONZE	03/28/19	1 : 1	DWG NO. PL-S3020DS-S124
①	1# CONTACT FOOT	1	PHOSPHOR BRONZE	03/28/19		
NO.	DESCRIPTION	QTY	MATERIAL	DATE	MATL.	TITLE
DRAWN BY:	DATE					
Jack Lu	03/28/19					
CHECKED BY:	DATE					
Jacky Chen	03/28/19					
APPROVED BY:	DATE					
Tony Kao	03/28/19					
SHEET NO.	1 of 1					
PART NO.	PL-S3020DS-S124					