

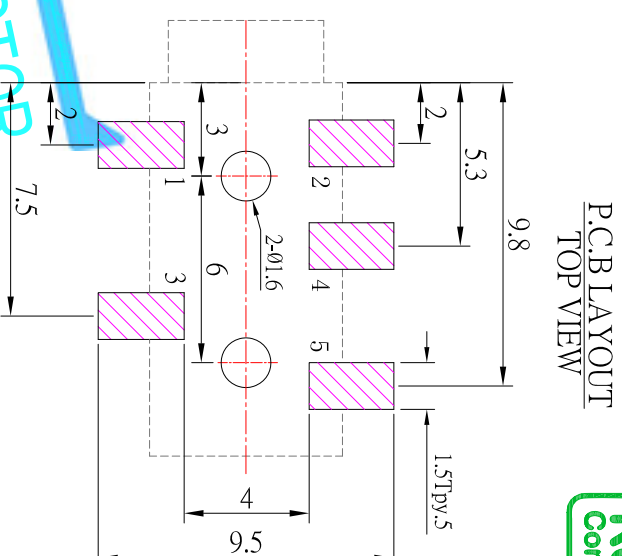


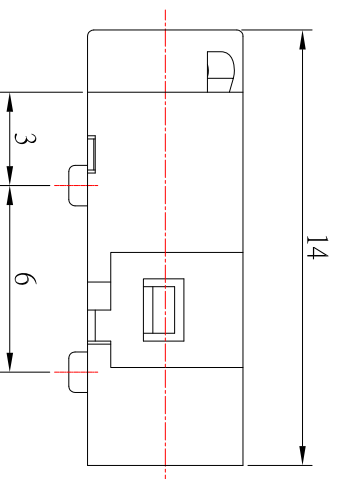


P.C.B LAYOUT
TOP VIEW



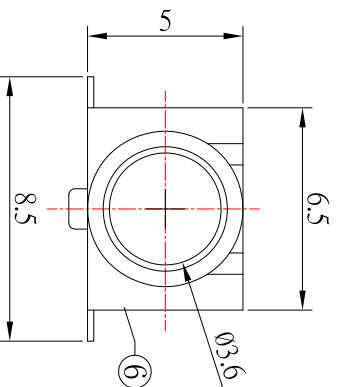


SPECIFICATION

1. Rating : DC 30V 0.5A ;
2. Contact resistance : $\leq 0.03 \Omega$;
3. Insulation resistance : $\geq 100 M\Omega$ (DC250V) ;
4. Withstand voltage : 500V AC ;
5. Insertion and extraction force : 3-20N ;
6. life test : 5,000 cycles °

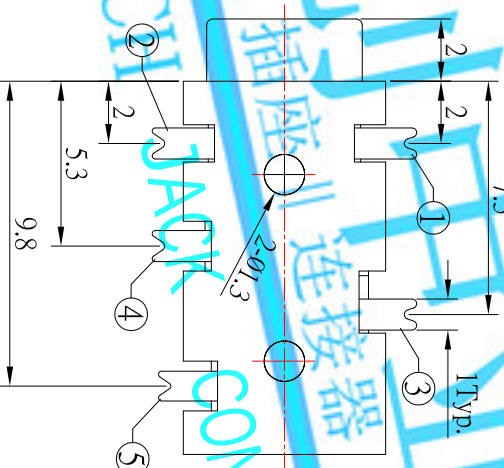

SCHEMATIC

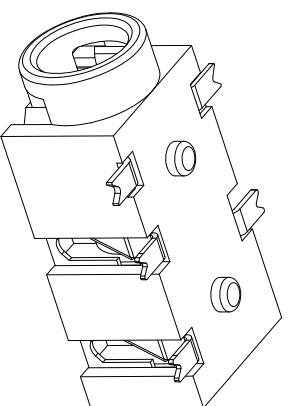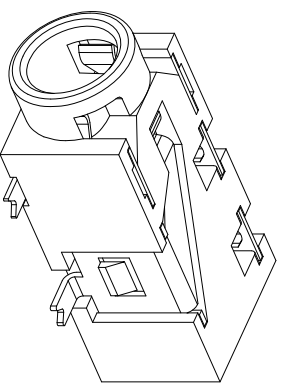

6	HOUSING	1	HTN	
5	5# CONTACT FOOT	1	STAINLESS STEEL	Ag-Plating
4	4# CONTACT FOOT	1	STAINLESS STEEL	Ag-Plating
3	3# CONTACT FOOT	1	PHOSPHOR BRONZE	Ag-Plating
2	2# CONTACT FOOT	1	PHOSPHOR BRONZE	Ag-Plating
1	1# CONTACT FOOT	1	PHOSPHOR BRONZE	Ag-Plating
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

LONGCHUANG ZHONGYE (HK) CO., LIMITED

[illegible]