
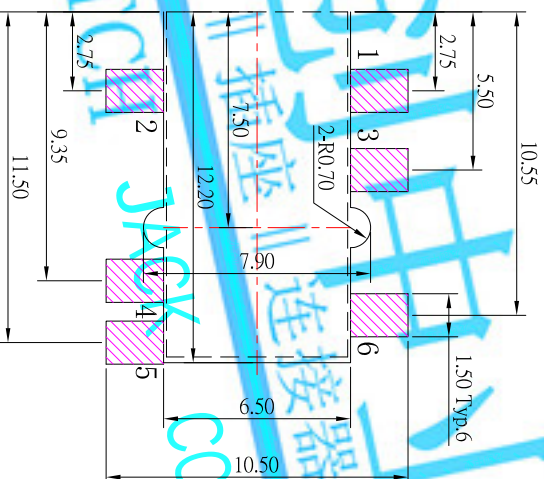
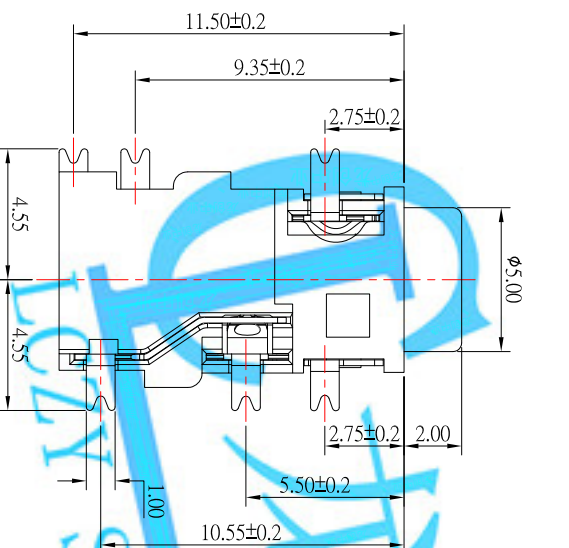
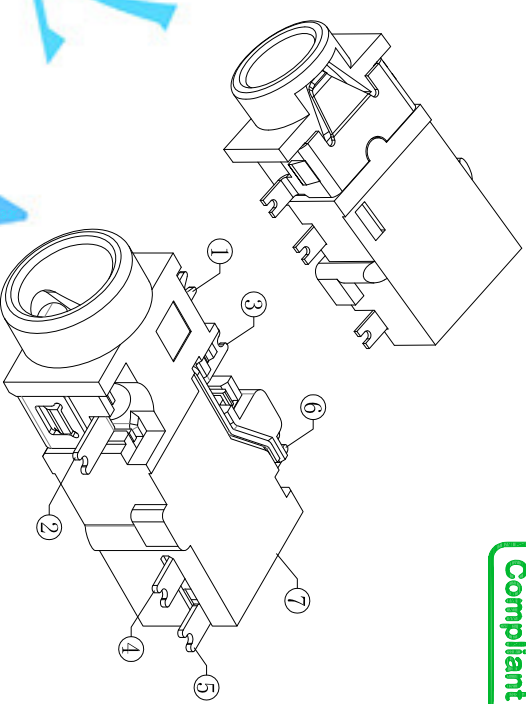
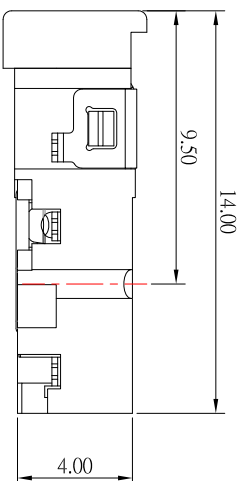
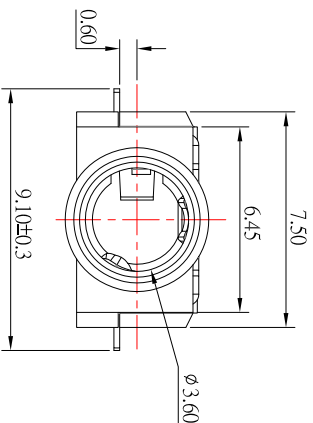


SCHEMATIC

SPECIFICATION

- 1.Rating : DC 30V, 0.5A ;
- 2.Contact resistance : $\leq 30m\Omega$;
- 3.Insulation resistance : $\geq 100M\Omega$;
- 4.Withstand voltage : 500VAC ;
- 5.Insertion and extraction force : 3-20N;
- 6.life test : 5,000 cycles .

P.C.B LAYOUT TOP VIEW

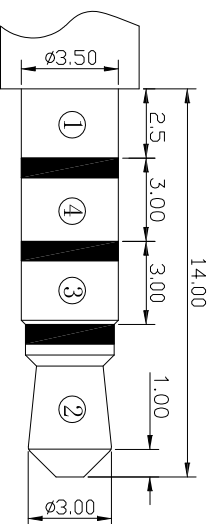

Ø3.50mm 4 POLE PLUG

NO.	DESCRIPTION	QTY	MATERIAL	PLATING
⑦	HOUSING	1	PPA	
⑥	6# CONTACT FOOT	1	PHOSPHOR BRONZE	Au-Plating
⑤	5# CONTACT FOOT	1	PHOSPHOR BRONZE	Au-Plating
④	4# CONTACT FOOT	1	PHOSPHOR BRONZE	Au-Plating
③	3# CONTACT FOOT	1	PHOSPHOR BRONZE	Au-Plating
②	2# CONTACT FOOT	1	PHOSPHOR BRONZE	Au-Plating
①	1# CONTACT FOOT	1	PHOSPHOR BRONZE	Au-Plating

DRAWN BY:	DATE	MAT'L	TITLE
-----------	------	-------	-------

Jack Lu	05/28/19		JACK
---------	----------	--	------

CHECKED BY:	DATE	FINISH	MODLE
-------------	------	--------	-------

Jacky Chen	05/28/19		PHONE JACK
------------	----------	--	------------

APPROVED BY:	DATE	SCALE	DWG NO.
--------------	------	-------	---------

Tony Kao	05/28/19	1 : 1	PR-S3118-x-S124
----------	----------	-------	-----------------

ITEM NO.	DESCRIPTION	DRAWN	DATE	3RD. ANGEL'S	UNITS	MM	SHEET NO.	PART NO.	PR-S3118-x-S124	SIZE
1	新增尺寸	Jack	070717				1 of 1			A4
2	更新圖面	Jack	092818							VIER
3	新增上方圖	Jack	101918							
4	更新圖面	Jack	052419							
5	新增PLD編號	Jack	052819							

LONGCHUANG ZHONGYE (HK)CO.,LIMITED

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ± 0.3
Above 5 ~ 15 ± 0.4
Above 15 ~ 30 ± 0.5
Above 30 ~ 50 ± 0.6
Angle