
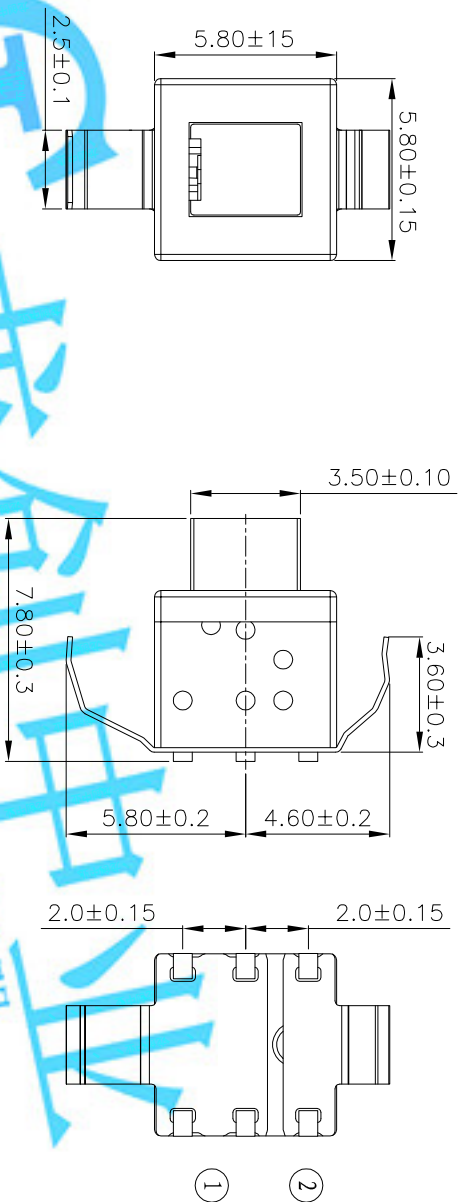
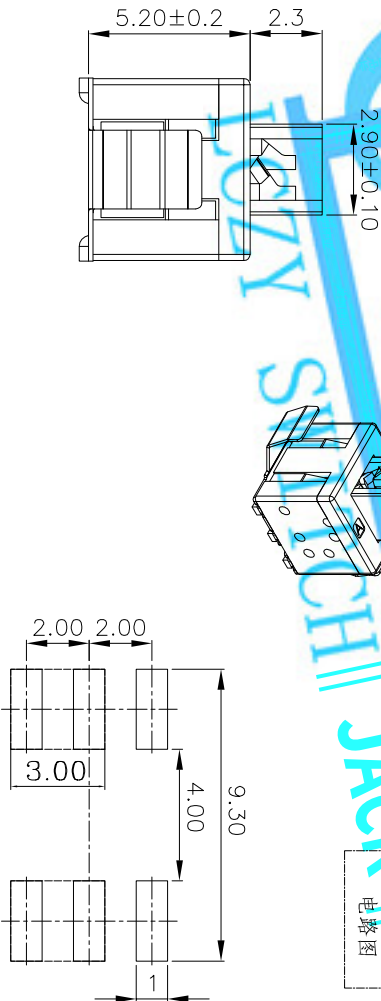


技术参数

- 1. 额定电流: DC30V 0.1A
- 2. 耐压: AC250伏 (50-60Hz) 持续1分钟
- 3. 接触电阻: 1欧max
- 4. 绝缘电阻: 100兆欧min . 500V DC.
- 5. 操作力: 180± 50gf.
- 6. 全行程: 2. 0mm± 0. 2mm.
- 7. 运行类型: 自锁 / 无锁
- 8. 寿命: 10. 000次.



PCBLayout(pattern Side)

NO.	Operating Type	Part No.
1	Push To Lock	AP-5856S-L1
2	Push No Loc	AP-5856S-N1

ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK
⑧	Leaf spring	—	2	SUS	Natural	—
⑦	Terminal	—	6	Brass strip	Plating silver	—
⑥	Contact	—	2	Phosphor bronze	Plating silver	—
⑤	Spring	—	1	SUS	Natural	—
④	Base	—	1	Nylon	Gray	—
③	Crochet Needle	—	1	SUS	Natural	—
②	Cover	—	1	POM	Black	—
①	KNOB	—	1	POM	White	—

APPROVALS		DATE	LONGCHUANG ZHONGYE (HK)CO.,LIMITED		
DRAWN	J.X.Zhang	2018/08/01			
CHECKED			TITLE: PUSHBUTTON SWITCHS		
APPROVALS			PART NO. AP-5856S		
TOLERANCES ARE		30~以上 10~30 5~10 ~ 5	±0.30 ±0.20 ±0.15 ±0.10	ANGLE ±2°	UNIT: mm SCALE: 1:1 PROJ:
ECN NO.	REV.	DATE.	DESCRIPTION.		
	A		NEW		
			CHANGE.		
			CHECK.		
			APPRO.		