


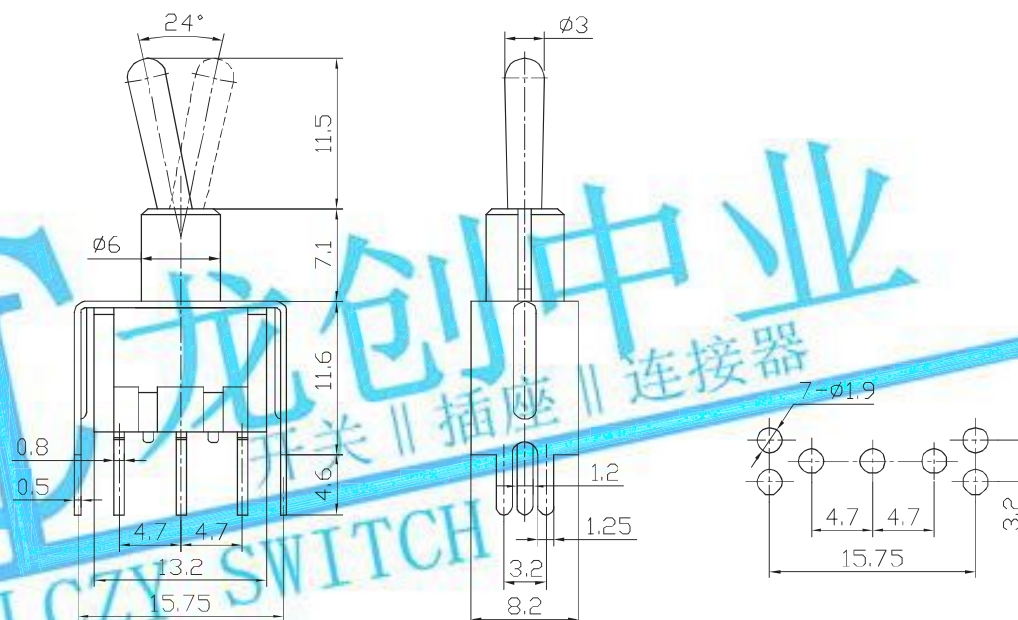

- 1.规格 Rating:6A 125VAC;3A 250VAC
- 2.接触电阻 Contact Resistance:20mΩ max
- 3.绝缘电阻 Insulation Resistance:500VDC 1000MΩ min
- 4.耐电压 Dielectric Strength:1500VAC ,1Minute
- 5.操作温度 Operating Temperature:-25℃ ~ +85℃
- 6.电气寿命 Electrical Life:10,000 Cycles

MTS-102-A2T ON-ON
MTS-112-A2T ON-(ON)
MTS-103-A2T ON-OFF-ON
MTS-113-A2T ON-OFF-(ON)
MTS-123-A2T (ON)-OFF-(ON)

SCALE	1:1			UNIT: mm
APVD			DATE	2017-5-22
CKD	单世佳		DWN	徐耀飞
SPECIFICATION No.	ZF-ZRS-			
DESCRIPTION:	TOGGLE SWITCH			
MODEL NO.	MTS-102-A2-N2			
PART No.	SPDT 3P			
LONGCHUANG ZHONGYE (HK)CO.,LIMITED				

[illegible]