

Pb

Process
Capable


RoHS
Compliant

2002/95/EC

REV	DESCRIPTION	DESIGNER	DATE

自由公差	
区分	公差
0	<0.5
0.50	<5
5.0	<10
10.0	<20
20.0	<50
未标注R角	R0.2
未标注角度公差	±1°



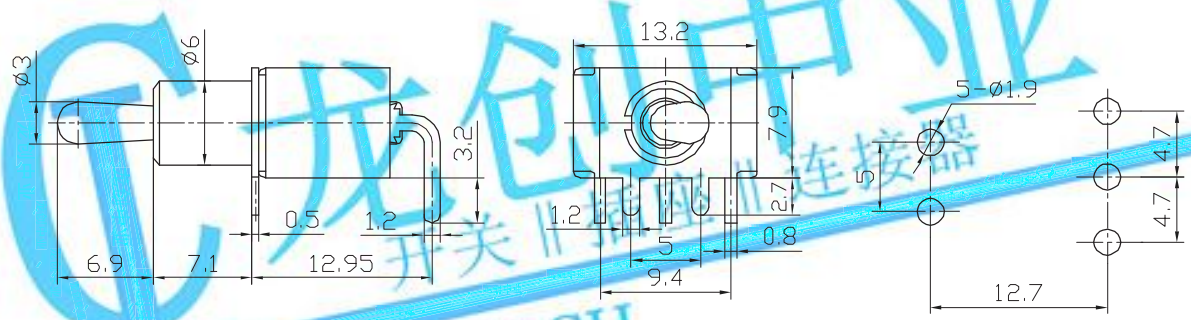

技术特性 Specification

1.规格 Rating:6A 125VAC;3A 250VAC

2.接触电阻 Contact Resistance:20mΩ max

3.绝缘电阻 Insulation Resistance:500VDC 1000MΩ min

4.耐电压 Dielectric Strength:1500VAC ,1Minute

5.操作温度 Operating Temperature:-25℃ ~ +85℃

6.电气寿命 Electrical Life:10,000 Cycles

SCALE	1:1		UNIT: mm
APVD		DATE	2017-5-22
CKD	单世佳	DWN	徐耀飞
SPECIFICATION NO.	ZF-ZRS-		
DESCRIPTION	TOGGLE SWITCH		
MODEL NO.	MTS-102-C3-NO		
PART No.	SPDT 3P		
LONGCHUANG ZHONGYE (HK)CO.,LIMITED			