





RoHS
Compliant
2002/95/EC

REV	DESCRIPTION	DESIGNER	DATE	自由公差	
				区分	公差
				类别	
				0	<0.5 ±0.10
				0.50	<5 ±0.15
				5.0	<10 ±0.20
				10.0	<20 ±0.30
				20.0	<50 ±0.40
				未标注R角	R0.2
				未标注角度公差	±1°

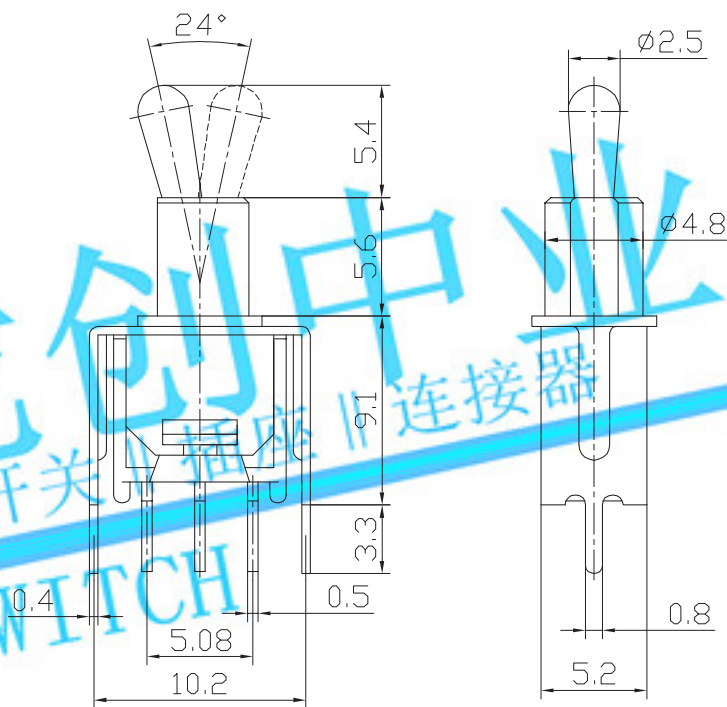

技术特性Specification

- 规格 Rating:3A 125VAC;1.5A 250VAC
- 接触电阻 Contact Resistance:20mΩ max
- 绝缘电阻 Insulation Resistance:500VDC 1000MΩ min
- 耐电压 Dielectric Strength:1000VAC, 1Minute
- 操作温度 Operating Temperature:-25℃ ~ +85℃
- 电气寿命 Electrical Life:10,000 Cycles

SCALE	1:1		UNIT: mm
APVD		DATE	2017-5-22
CKD	单世佳	DWN	徐耀飞
SPECIFICATION NO.	ZF-ZRS-		
DESCRIPTION	TOGGLE SWITCH		
MODEL NO.	SMTS-202-C2-N2 SMTS-203-C2-N2		
PART No.	SPDT 3P		

NO	NAME	MATERIAL	QTY	FINISHING	NO	NAME	MATERIAL	QTY	FINISHING

LONGCHUANG ZHONGYE (HK)CO.,LIMITED