


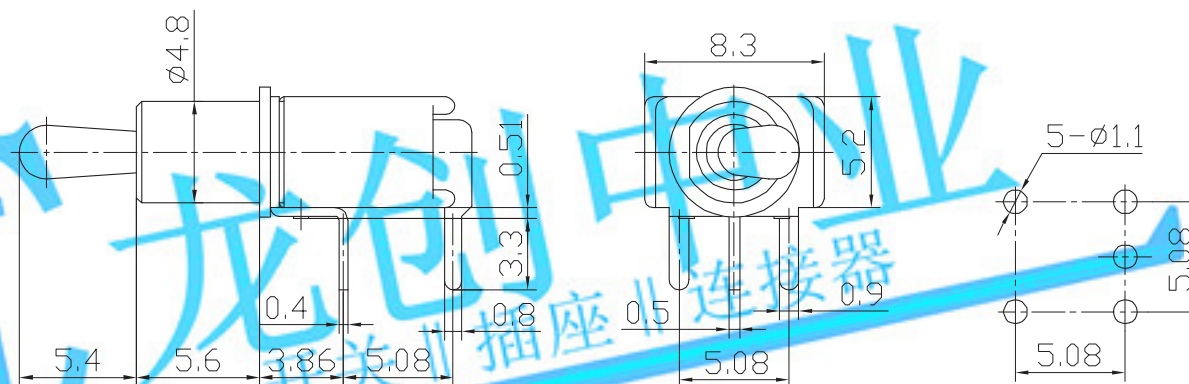

1. 规格 Rating:3A 125VAC;1.5A 250VAC
2. 接触电阻 Contact Resistance:20mΩ max
3. 绝缘电阻 Insulation Resistance:500VDC 1000MΩ min
4. 耐电压 Dielectric Strength:1000VAC, 1Minute
5. 操作温度 Operating Temperature:-25℃ ~ +85℃
6. 电气寿命 Electrical Life:10,000 Cycles

[illegible]