



DIMENSIONS

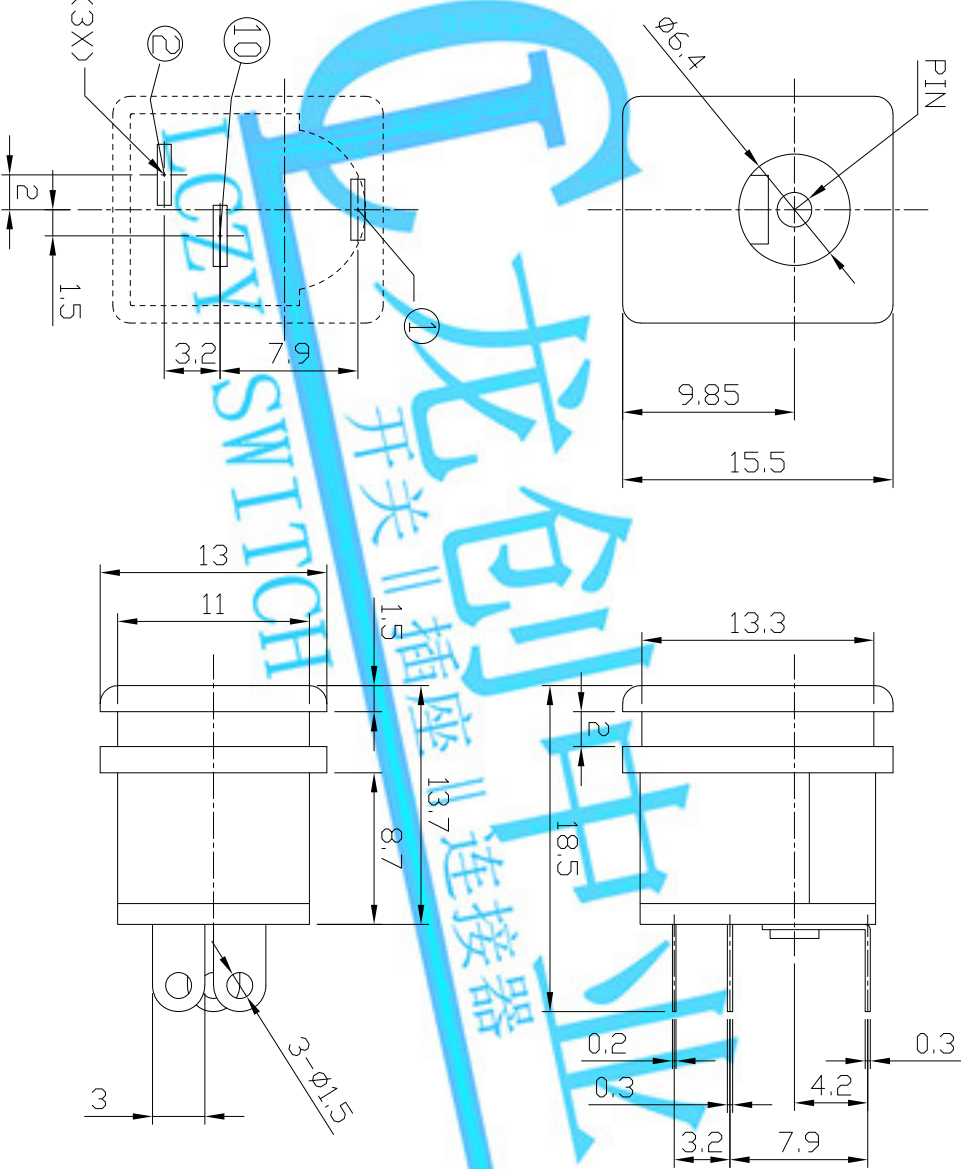


Bill of materials:

					GENERAL TOLERANCE		UNITS	LONGCHUANG ZHONGYE (HK)CO.,LIMITED					
					WITHIN 1.5mm±0.1mm		MAT'L				mm		
					OVER 1.5mm±0.2mm		SEE NOTE						
							FINISH						
							SEE NOTE						
6	TERMINAL	BASS STRIP	1	Ag PLATED	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE WRITTEN CONSENT OF ACCURATE INNOTECH INC.			TITLE: DIP DC POWER JACK			PART NO.: DCE0-02290		
5	TERMINAL	BASS STRIP	1	Ag PLATED									
4	SPRING TERMINAL	PBS	1	Ag PLATED									
3	TERMINAL BASE	PHENDLIC RESIN	1	NATURAL									
2	PLUG PIN	BASS	1	Ag PLATED									
1	CASE	PC	1	BLACK/WHITE				Q'TY					
ND.	PARTS	MATERIAL	Q'TY	FINISHING									

Model No.	H	I	J	X
CENTER PIN	ø2.0	ø2.35	ø2.5	ø2.7



DC MATE PLUG



- MODEL CODE:
DCCE0-02290- A □ PC BK S 0 4
(1) (2) (3)(4) (5) (6) (7)(8) (9)
(1):Series type:DIP DC POWER JACK.
(2):Series No.
(3):Schematic option: A
(4):Center pin diameter:
H=ø2.0 , I=ø2.35 , J=ø2.5, X=ø2.7
(5):Material of housing:
PC=PC
(6):Housing color:
BK=Black
(7):Terminal plating
S=Silver(Ag)
(8):Special option:
0=No special option
(9):Packing mode:
4=Bag packing

- Specification:
1.Rating :DC 30V 0.3A.
2.Contact resistance :≤100mΩ.
3.Insulation resistance :≥100MΩ (500VDC).
4.Withstanding voltage: 500VAC .
5.Insertion and extraction force: 0.3~3Kgs.
6.life test: 5000cycles min.
7.Operation temperature range:-25°C~85°C